

MAS9118

Buzzer DAC Interface

This is preliminary information on a new product under development. Micro Analog Systems Oy reserves the right to make any changes without notice.

Preliminary

- Excellent Frequency Response
- High Efficiency 8 Ohms Driver
- Serial Interface
- Separate Voltages at Interface and Driver

DESCRIPTION

MAS9118 is a high performance analog interface for buzzer or small loudspeaker. It employs new circuit structures, which provide a possibility to play high quality speech or music by using low cost buzzer or miniature speaker. The driver has excellent power efficiency due to class-D operation

and provides high sound pressure due to balanced outputs. The interface is used as any eight bit DAC, just by loading the signal to the input register at regular time intervals.


FEATURES

- Excellent Frequency Response
- MSOP Package
- No External Components
- Easy to Use


APPLICATION

- Cellular Phones
- Toys

BLOCK DIAGRAM

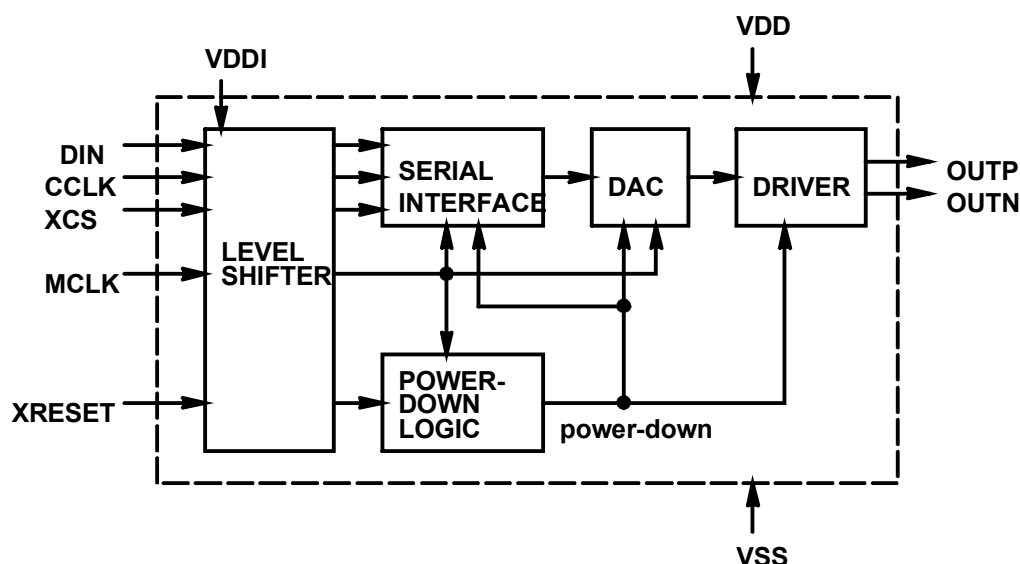

PIN CONFIGURATION

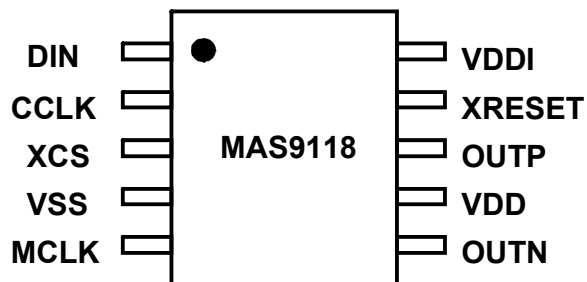

PIN DESCRIPTION

Pin Name	Pin	Type	Function
DIN	1	DI	Data Input of the Serial Interface
CCLK	2	DI	Clock Input of the Serial Interface
XCS	3	DI	Chip Select of the Serial Interface, sets the data sampling frequency
VSS	4	P	Ground
MCLK	5	DI	Master Clock Input
OUTN	6	AO	Negative Output for the Buzzer
VDD	7	P	Positive Power Supply
OUTP	8	AO	Positive Output for the Buzzer
XRESET	9	DI	Reset and Power-down, Active Low
VDDI	10	AI	Input Signal High Reference Voltage

GENERAL DESCRIPTION

Main features

The data path of MAS9118 consists of level shifters, serial interface, interpolating digital to analog converter (DAC) and balanced output driver (H-bridge).

MAS9118 produces PWM (pulse width modulated) output signal according to the digital input data sourced through DIN. Because of the PWM output (class-D amplifier) there is no need for external capacitors between MAS9118 output and load element (no DC voltage at output).

The amplifier has excellent power efficiency due to class-D operation. The driver distortion characteristic is load insensitive.

The buzzer is driven in an H-bridge. The driver balanced outputs double the voltage, which is advantageous for portable devices with low voltage.

The device enters to a power-down mode after power-on reset or when XRESET pin is low or when master clock is stopped. Even though the device is internally reset at start-up it is recommended to keep XRESET low when switching powers on and rise XRESET signal up later (a few ms after powers are switched on). Output pins (OUTP, OUTN) are connected to ground voltage (VSS) at power-down mode to prevent some times harmful DC bias at output.

Interfaces

There are level shifters in the input (MCLK, CCLK, DIN, XCS). Input level shifting provides the possibility to use lower signal levels for device control and higher signal level for buzzer driver, which enables higher voltage to buzzer. The

operating voltage of the driving circuit should be connected to VDDI, which is a reference level for control signals.

The input signal is written into the internal register via the asynchronous serial interface. Serial interface consists of an input pin for data (DIN), chip select pin (XCS) and control clock (CCLK).

CCLK has to be pulsed eight times while XCS is low to shift the data in. The data is shifted into the serial input register when 8 CCLK pulses has occurred after XCS falling edge. When the eighth rising edge comes the data is re-synchronized with MCLK and passed to the DAC. XCS has to be set high before next data can be read in (data read is started by XCS falling edge). Input data read is cancelled if XCS is set high before all 8 data bits has been read in, and old data remains to device output.

The serial data word length is 8 bits and it is 2-complement with MSB first. The data (word) rate (XCS falling edge -frequency), which is the device output sampling frequency, should be in the range of 8 to 80 kHz for good audio quality.

The master clock (MCLK) is used for the on-chip sigma-delta modulator, which truncates the 8-bit input signal to 1-bit representation. The MCLK is used as a DAC output sampling frequency. To minimize jitter, MCLK should be integer multiple of the sampling frequency (XCS frequency).

Since CCLK and MCLK are allowed to be asynchronous, double buffering for input data is used to guarantee correct operation in all conditions.

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Conditions	Min	Max	Unit
Positive Supply	VDD, VDDI			6.0	V
Negative Supply	VSS			-0.3	V
Voltage at Any Digital Input				VSS-1 to VCC+1	V
Storage Temperature			-65	+150	°C
ESD Protection				2000	V
Latch-up Current				±100	mA

Note: Short circuit connection between OUTP/OUTN pins may destroy the device.

RECOMMENDED OPERATION CONDITIONS

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Positive Supply	VDD		2.5	3.6	5.5	V
Voltage of the Input Signal	VDDI		1.5	1.8	VDD	V
Ambient Temperature	Ta		-40		+85	°C
Standby Current	Istby	no load, zero input		1.0	5.0	mA
Active Current	Idd	8 Ohm load, DIN=1 kHz 0dB sine VDD=2.5V VDD=3.6V VDD=5.5V	tdb	86 142 240	tdb	mA mA mA
Power Down Leakage Current, Ext. Reset	Ipd1	XRESET=low, MCLK active		21	100	µA
Power Down Leakage Current, Clock Reset	Ipd2	MCLK=low		0.1		µA
Master Clock Frequency	fMCLK		0.5	1	3	MHz

ELECTRICAL CHARACTERISTICS

◆ Analog Characteristics

AC Characteristics

Amplitude Response

(VDD=+3.6V, VDDI=+1.8V, VSS=0V, F_{XCS}=62.5kHz, F_{MCLK}=1000kHz, F_{CCLK}=1000 kHz, Ta=+25 °C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Absolute Gain Error at 1 kHz	Gabs			0.1		dB
Gain Variation with Frequency	Gaf	Relative to Gabs, f=0...8kHz		0.01		dB
Gain Variation with Signal Level	Gal	Relative to Gabs 0...-12dB		0.5		dB
Gain Variation with Temperature	Gat			0.01		dB

ELECTRICAL CHARACTERISTICS

Phase Response

(VDD=+3.6V, VDDI=+1.8V, VSS=0V, F_{XCS}=62.5kHz, F_{MCLK}=1000kHz, F_{CCLK}=1000 kHz, Ta=+25 °C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Absolute Group Delay	Gda	f=1.0 kHz, from rising edge of XCS or 8 th CCLK		2		µs
Group Delay Distortion	Gdr	f=0...20kHz, relative to Gda		0		ms


Noise and Distortion

(VDD=+3.6V, VDDI=+1.8V, VSS=0V, F_{XCS}=62.5kHz, F_{MCLK}=1000kHz, F_{CCLK}=1000 kHz, Ta=+25 °C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Signal to Noise and Distortion Ratio	SNR	f=1kHz, A-weight				
		100 kOhm load:				
		DIN=-1dB		45		dB
		DIN=-3dB		46		dB
		DIN=-6dB		47		dB
		8 Ohm load:				
		DIN=-1dB		42		dB
		DIN=-3dB		43		dB
		DIN=-6dB		44		dB

Serial Interface Timing Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Frequency of CCLK	FCCLK				13	MHz
Period of CCLK high	TWHC	Measured from VIH to VIH	35			ns
Period of CCLK low	TWLC	Measured from VIL to VIL	35			ns
Rise time of CCLK	TRC	Measured from VIL to VIH			10	ns
Fall time of CCLK	TFC	Measured from VIH to VIL			10	ns
Hold time, CCLK high to XCS low	THCSH		10			ns
Setup time, XCS low to CCLK high	TSSLCH		20			ns
Setup time, valid DIN to CCLK high	TSDCH		5			ns
Hold time, CCLK high to invalid CI	THCHD		10			ns
Hold time, 8 th CCLK high to XCS high	THLCHS		15			ns

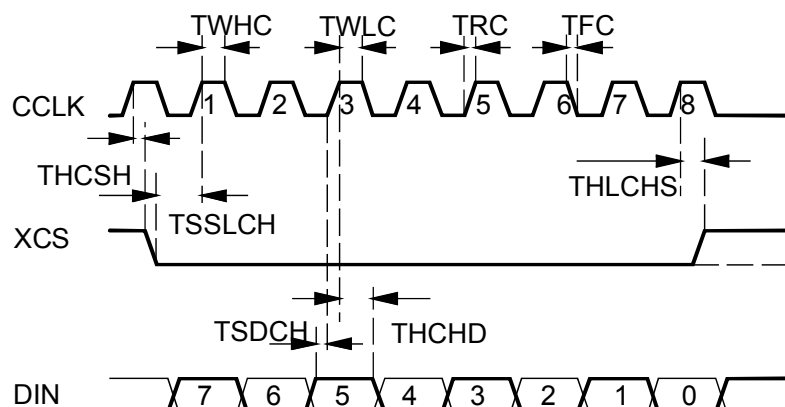

ELECTRICAL CHARACTERISTICS

◆ Digital Characteristics

DC Characteristics


(VDD=+3.6V, VDDI=+1.8V, VSS=0V, F_{XCS}=62.5kHz, F_{MCLK}=1000kHz, F_{CCLK}=1000 kHz, Ta=+25 °C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input Low Voltage	VIL	All Digital Inputs, DC	-0.3		0.3* VDDI	V
Input High Voltage	VIH	All Digital Inputs, DC	0.7* VDDI			V
Input Low Current	IL	Any Digital Input, GND<Vin<VIL	-10		10	μA


APPLICATION INFORMATION

Typical application setup is shown below.
Microcontroller is controlling MAS9118 using DIN, CCLK and XCS. The microcontroller power supply is regulated voltage, which is lower than the battery voltage.

MAS9118 output drivers are directly connected to the battery voltage. The buzzer or loudspeaker can be directly connected between MAS9118 positive (OUTP) and negative (OUTN) outputs. The MAS9118 chip will automatically connect these outputs to VSS when chip is at power-down mode.

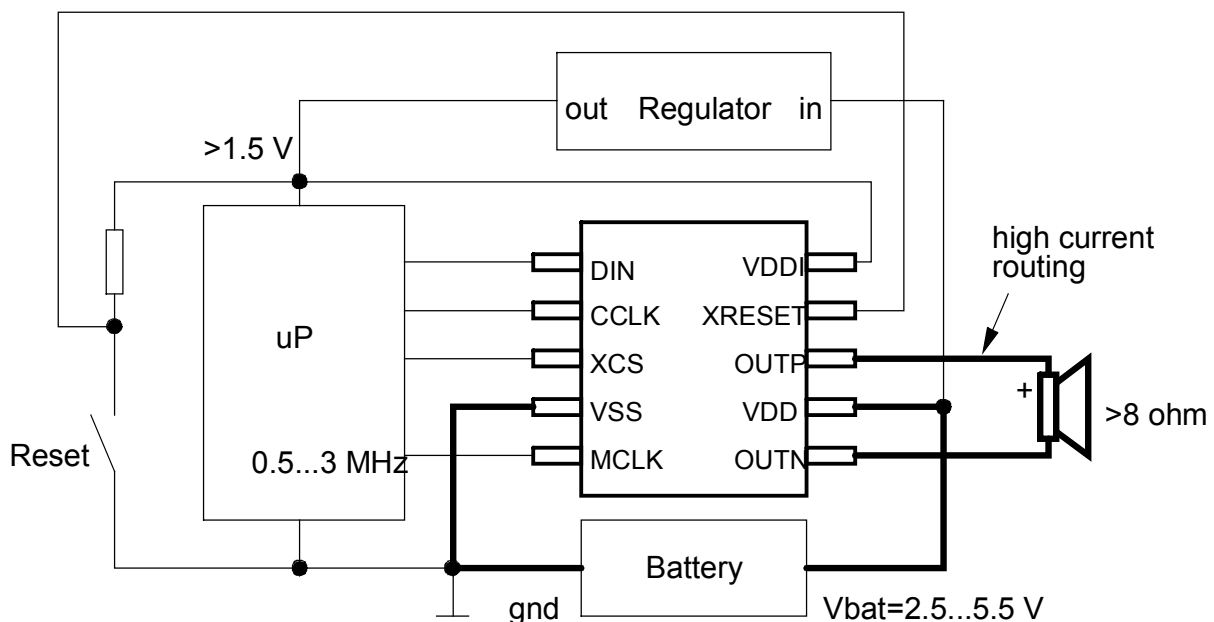

PACKAGE (MSOP10) OUTLINES

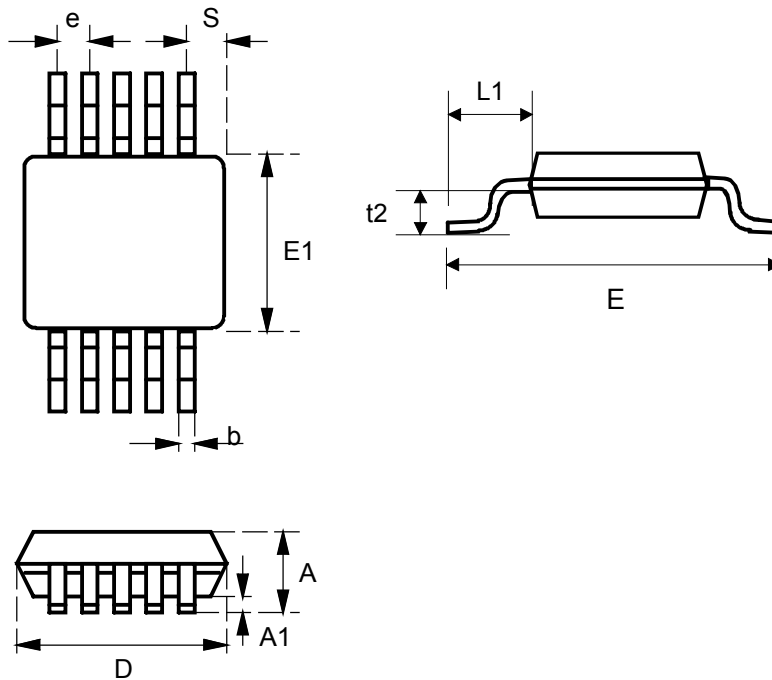

Dimension	Min	Typical	Max	Unit
A	0.95	1.00	1.10	mm
A1	0.05	0.10	0.15	mm
D	2.90	3.00	3.10	mm
E	4.75	4.90	5.05	mm
E1	2.90	3.00	3.10	mm
t2	0.33	0.41	0.49	mm
b	0.15	0.23	0.30	mm
L1		0.95		BSC
e		0.50		BSC
S		0.50		BSC

Dimensions are in accordance with Jedec standard MO-187 (excluding pitch).

ORDERING INFORMATION

Product Code	Product	Package	Comments
MAS9118ASMB-T	Buzzer DAC Interface	MSOP10	Tape and Reel

LOCAL DISTRIBUTOR

--

MICRO ANALOG SYSTEMS OY CONTACTS

Micro Analog Systems Oy Kamreerintie 2, P.O. Box 51 FIN-02771 Espoo, FINLAND	Tel. +358 9 80 521 Fax +358 9 805 3213 http://www.mas-oy.com
--	--

NOTICE

Micro Analog Systems Oy reserves the right to make changes to the products contained in this data sheet in order to improve the design or performance and to supply the best possible products. Micro Analog Systems Oy assumes no responsibility for the use of any circuits shown in this data sheet, conveys no license under any patent or other rights unless otherwise specified in this data sheet, and makes no claim that the circuits are free from patent infringement. Applications for any devices shown in this data sheet are for illustration only and Micro Analog Systems Oy makes no claim or warranty that such applications will be suitable for the use specified without further testing or modification.

射频和天线设计培训课程推荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立,致力并专注于微波、射频、天线设计研发人才的培养;我们于 2006 年整合合并微波 EDA 网(www.mweda.com),现已发展成为国内最大的微波射频和天线设计人才培养基地,成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程,广受客户好评;并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书,帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司,以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训课程列表: <http://www.edatop.com/peixun/rfe/129.html>



射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材;旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习,能够让学员完全达到和胜任一个合格的射频工程师的要求...

课程网址: <http://www.edatop.com/peixun/rfe/110.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程,共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解,并多结合设计实例,由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS,迅速提升个人技术能力,把 ADS 真正应用到实际研发工作中去,成为 ADS 设计专家...

课程网址: <http://www.edatop.com/peixun/ads/13.html>



HFSS 学习培训课程套装



该套课程套装包含了本站全部 HFSS 培训课程,是迄今国内最全面、最专业的 HFSS 培训教程套装,可以帮助您从零开始,全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装,更可超值赠送 3 个月免费学习答疑,随时解答您学习过程中遇到的棘手问题,让您的 HFSS 学习更加轻松顺畅...

课程网址: <http://www.edatop.com/peixun/hfss/11.html>

CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出,是最全面、系统、专业的 CST 微波工作室培训课程套装,所有课程都由经验丰富的专家授课,视频教学,可以帮助您从零开始,全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装,还可超值赠送 3 个月免费学习答疑...

课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 天线设计培训课程套装

套装包含 6 门视频课程和 1 本图书,课程从基础讲起,内容由浅入深,理论介绍和实际操作讲解相结合,全面系统的讲解了 HFSS 天线设计的全过程。是国内最全面、最专业的 HFSS 天线设计课程,可以帮助您快速学习掌握如何使用 HFSS 设计天线,让天线设计不再难...

课程网址: <http://www.edatop.com/peixun/hfss/122.html>

13.56MHz NFC/RFID 线圈天线设计培训课程套装

套装包含 4 门视频培训课程,培训将 13.56MHz 线圈天线设计原理和仿真设计实践相结合,全面系统地讲解了 13.56MHz 线圈天线的工作原理、设计方法、设计考量以及使用 HFSS 和 CST 仿真分析线圈天线的具体操作,同时还介绍了 13.56MHz 线圈天线匹配电路的设计和调试。通过该套课程的学习,可以帮助您快速学习掌握 13.56MHz 线圈天线及其匹配电路的原理、设计和调试...

详情浏览: <http://www.edatop.com/peixun/antenna/116.html>



我们的课程优势:

- ※ 成立于 2004 年,10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养,更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授,结合实际工程案例,直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>