

A Study of RFID Devices and Efficient Ways of Simulating RFID Systems with Maxwell Software

Bogdan C. Ionescu, PhD, Senior Member of Technical Staff, Ansoft Corporation, Pittsburgh, PA, USA

Abstract: RFID area of applications is currently undergoing constant change in regard of standardization. As any other frequency allocation issue, RFID applications are generally governed by government legislation and as such it may differ in some countries.

Standardization activities are seeking to create a more uniform environment in this respect. The most significant carrier frequencies for RFID applications that have been identified to cover low, medium and high ranges are 125 KHz, 13.56 MHz and 2.45 GHz. This paper deals with low and medium RFID applications which appear to enjoy a considerable degree of uniformity of standards and acceptance worldwide.

1. Introduction

The heart of an RFID system consists in an emitting antenna (reader) and a tag antenna. The data transmission between the two antennas is based on inductive coupling: the reader antenna generates a magnetic field which couples with the antenna on the tag. The vast majority of 125 KHz and 13.56 MHz RFID systems operate as passive devices. This means that the energy needed for the tag to respond to the reader is supplied by the reader energy. The response of the tag is done by changing the load of the field in terms of amplitude and/or phase of the signal.

Such inductive RFID operate in the “near field” of the reader antenna so that no electromagnetic wave propagation effects are part of the data transmission process. This is why we use the “antenna” term in a loose sense when it comes to inductively coupled circuits. The near field character of the coupling has as a direct effect on the effective distance between such circuits that still allows data flow with specified baud rates and accuracy. As such, as a rule, such effective distances are of the order of the characteristic dimension of the reader antenna. For coupling to longer distances one needs to remember that the field strength decreases with the third power of distance and, as a consequence, the power needed to make communication possible must therefore increase with the sixth power of distance. This sets limits to the “performance” of such devices. The performance is in fact defined for each particular application such that an RFID system must be fit for purpose.

Low and medium frequency device operate as a rule as passive devices, taking the energy needed to communicate from the emitting antenna. Active devices (mostly high frequency RFIDs) usually have a battery that can give an autonomy of around 10 years.

Passive devices have as a rule lower signal-to-noise characteristics (since they have to use incoming energy) but they have a long life and do not need maintenance. As a result they're also cheaper than active devices.

RFID systems antennas come in different shapes, however the vast majority are built using rectangular or circular shapes and have a relatively low number of turns, between 4 and 10. The RFID systems themselves can achieve high levels of complexity having incorporated memory, data processing capabilities that include communication encryption and protocols.

2. 13.56 MHz RFID simulation

13.56 MHz RFIDs are likely the most significant application in terms of number of such devices already manufactured and used in applications. Fig. 1 below shows a typical geometry for a 13.56 MHz RFID.

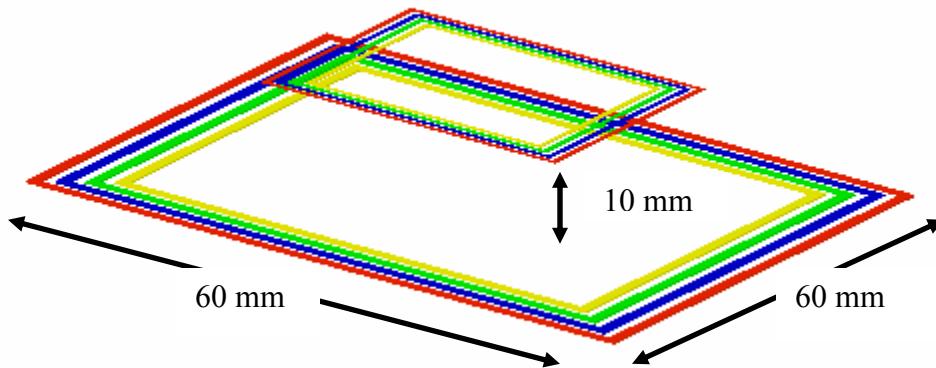


Fig. 1 RFID reader and tag geometry

The material considered for this example is copper but many RFID antennas also use aluminum.

The modeling approach we take here is to extract from the 3D field solution the electromagnetic essence which is the inductance and capacitance matrices as well as the resistance of the antenna loops. One aspect one has to bear in mind is the influence of the distributed nature of the respective parameters. As a consequence, each turn of the system is modeled individually and accounts in the global system for its own contribution. This makes it possible to take into account effects such as capacitive coupling between turns with benefit influence on the overall accuracy of the system level simulation. Indeed, modeling the capacitive coupling only between the two antennas as a whole may not be accurate enough for some applications.

The main modeling steps for the RFID application is to compute the distributed inductance matrix, capacitance matrix and the resistance of the loops. Additionally the stray capacitance of the reader antenna is also necessary for the calculation of another

quantity, the self resonance of the antenna. For the reader antenna shown above (the larger coil in Fig. 1) Maxwell 3D Field Simulator computed a stray capacitance of 2.82 pF. This is simply obtained following an electrostatic simulation of the model that contains the reader antenna only. The inductance of the reader antenna simulation yielded a value of 1.85 μ H. Thus, the self resonant frequency can be calculated with:

$$f = \frac{1}{2\pi\sqrt{L \cdot C}} = 69.9 \text{ MHz}$$

Maxwell 3D Field Simulator has the capability to export the distributed inductance matrix of the two antennas. There is a choice of the format of the exported matrix: the user can choose between Maxwell Spice format or Simplorer formats. Figure 2 shows the respective export panel. Since the antennas have 4 turns each, this results in a 8 by 8 inductance matrix. The diagonal terms of the inductance matrix represent the self inductance of each individual turn while the non-diagonal terms represent the respective mutual inductances.

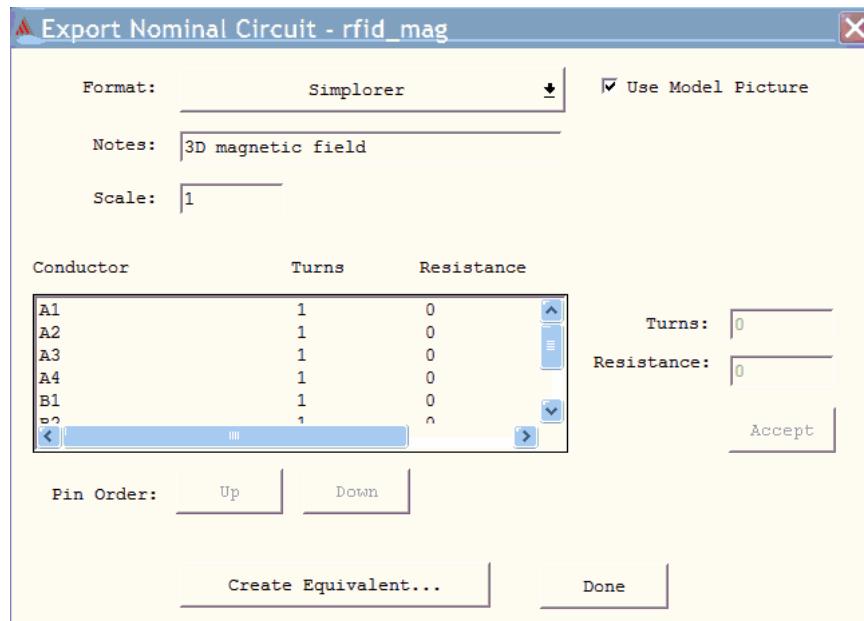


Fig. 2 Matrix export panel

A similar procedure is followed to export the capacitance matrix. This matrix brings a new dimension to the global model since the inter-turn capacitance is important for the accuracy of the system level simulation of the two inductively coupled antennas. It should be noted that another capacitor is built in and together with the antenna coil is tuned to provide the desired oscillating frequency of 13.56 MHz. The field simulation of that capacitor is a trivial aspect and will not be discussed here.

Another important factor in the simulation is the resistance of each antenna. One reason for this is the calculation of the quality factor of the antennas. Fig. 3 shows the

distribution of the currents in the traces at 13.56 MHz. Strong skin and proximity effects can be clearly seen.

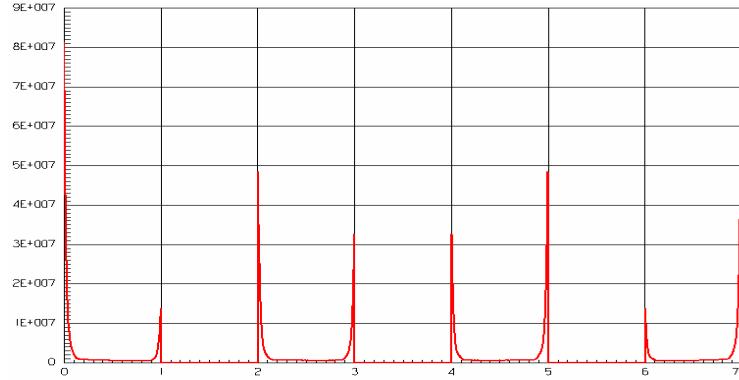


Fig. 3 Current distribution in the traces

The final step in the simulation of the system of the two antennas is bringing all the elements together in a circuit simulation. Fig. 4 shows a Simplorer model containing the exported matrices connected together with driving source.

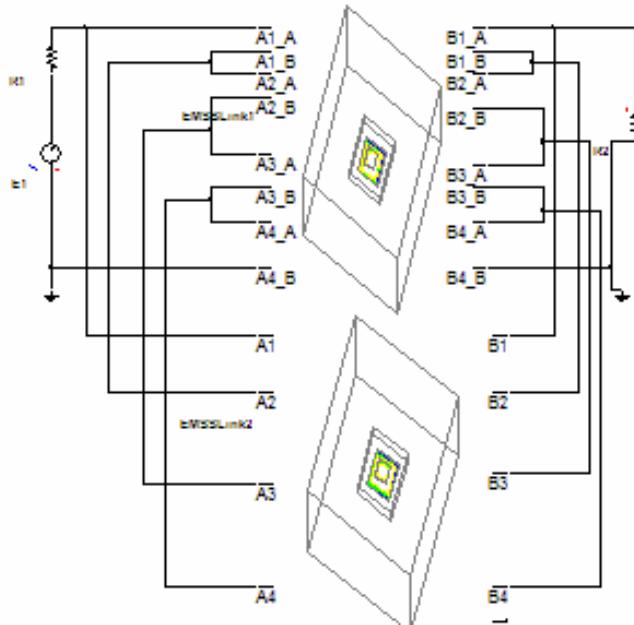


Fig. 4 Circuit model of the two antennas in Simplorer

The results of the simulation are shown in Fig. 5, the input signal is a 10 V 13.56 MHz voltage, the output signal has a magnitude of about 0.9 V for the tag placed at 10 mm above the reader.

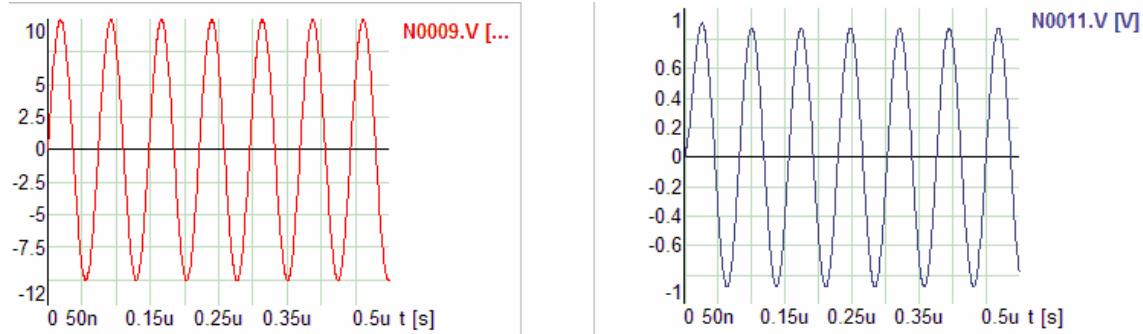


Fig. 5 Input and output signals after the circuit simulation

The above results reflect the simulation of the system for a given relative position between the reader and the tag antennas. Parametric simulations can also be performed, each with the possibility of exporting the respective matrices. Therefore a high degree of automation of all aspects of the simulation of this RFID application can be achieved. Fig. 6 shows for example the variation of different mutual inductances as a function of distance. It should be noted that automatic mesh adaptive process available in Maxwell is a key factor in achieving the desired accuracy of the simulation for various relative positions between the antennas.

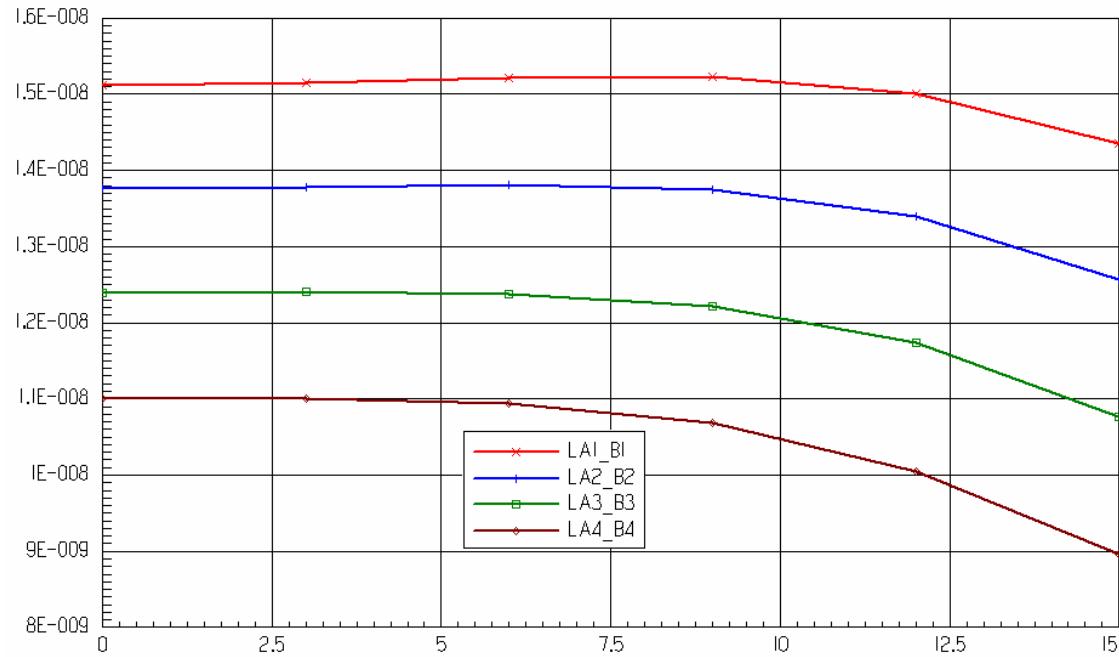


Fig. 6 Mutual inductance variation between various turns of the reader and tag coils for different relative positions between the two antennas

Fig 7 depicts the decrease of the magnetic field magnitude outside the reader loops along a line in the plane of the loops.

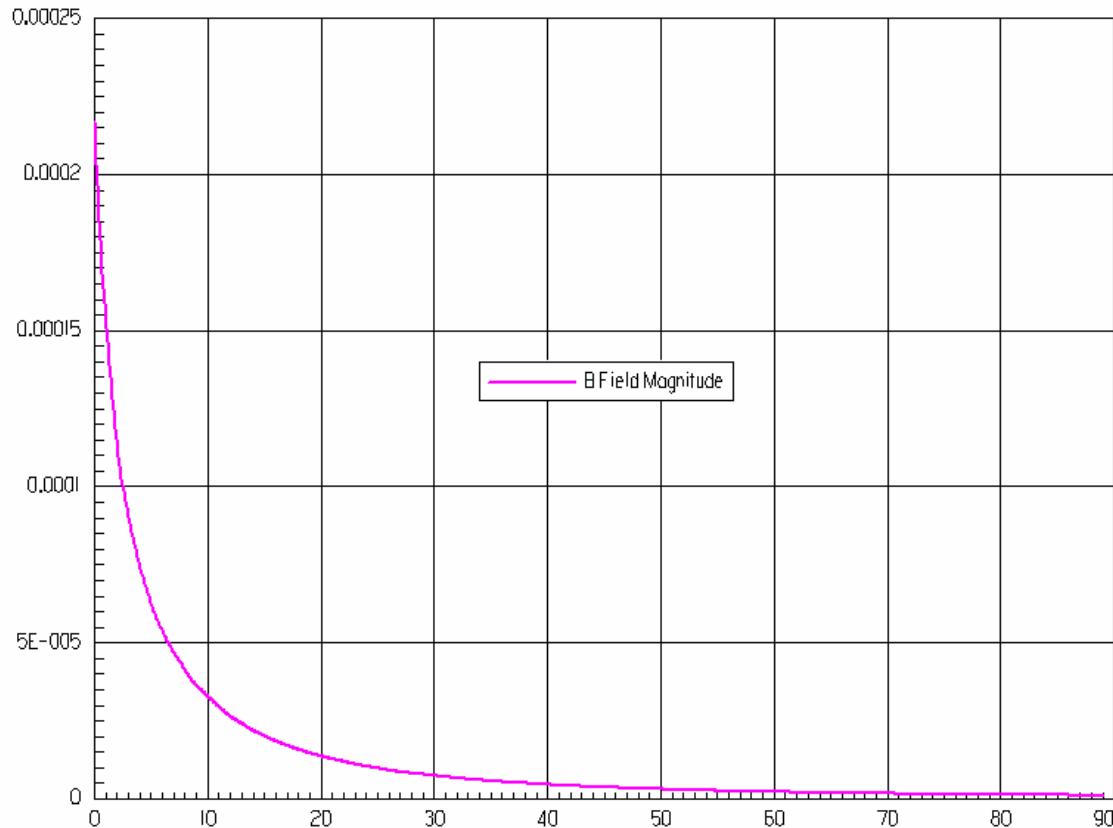


Fig. 7 Variation of the B field away from the reader antenna

3. Conclusion

This paper presents the essence of a very efficient and accurate procedure to simulate RFID low and medium RFID applications where the transmission of energy between antennas occurs through inductive magnetic field coupling. We note here excellent match between the simulation with Maxwell software and measurements performed by customers. The circuit simulation -once the equivalent circuits with field effects have been obtained- offers a number of advantages. Since these RFID antennas can be imbedded in complex systems, the system level simulation with high level of accuracy is possible at circuit level. The low and medium frequency RFID devices can be very efficiently modeled with Ansoft software tools and represent a good example of the usefulness of combined field and circuit level analysis.

It should be noted that at high frequencies where propagation effects cannot be ignored, a full field solution using a high frequency simulator becomes necessary.

射 频 和 天 线 设 计 培 训 课 程 推 荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立，致力并专注于微波、射频、天线设计研发人才的培养；我们于 2006 年整合合并微波 EDA 网(www.mweda.com)，现已发展成为国内最大的微波射频和天线设计人才培养基地，成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程，广受客户好评；并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书，帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司，以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训课程列表：<http://www.edatop.com/peixun/rfe/129.html>



射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材；旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习，能够让学员完全达到和胜任一个合格的射频工程师的要求…

课程网址：<http://www.edatop.com/peixun/rfe/110.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程，共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解，并多结合设计实例，由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS，迅速提升个人技术能力，把 ADS 真正应用到实际研发工作中去，成为 ADS 设计专家…



课程网址：<http://www.edatop.com/peixun/ads/13.html>



HFSS 学习培训课程套装

该套课程套装包含了本站全部 HFSS 培训课程，是迄今国内最全面、最专业的 HFSS 培训教程套装，可以帮助您从零开始，全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装，更可超值赠送 3 个月免费学习答疑，随时解答您学习过程中遇到的棘手问题，让您的 HFSS 学习更加轻松顺畅…

课程网址：<http://www.edatop.com/peixun/hfss/11.html>

CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出, 是最全面、系统、专业的 CST 微波工作室培训课程套装, 所有课程都由经验丰富的专家授课, 视频教学, 可以帮助您从零开始, 全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装, 还可超值赠送 3 个月免费学习答疑…



课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 天线设计培训课程套装

套装包含 6 门视频课程和 1 本图书, 课程从基础讲起, 内容由浅入深, 理论介绍和实际操作讲解相结合, 全面系统的讲解了 HFSS 天线设计的全过程。是国内最全面、最专业的 HFSS 天线设计课程, 可以帮助您快速学习掌握如何使用 HFSS 设计天线, 让天线设计不再难…

课程网址: <http://www.edatop.com/peixun/hfss/122.html>

13.56MHz NFC/RFID 线圈天线设计培训课程套装

套装包含 4 门视频培训课程, 培训将 13.56MHz 线圈天线设计原理和仿真设计实践相结合, 全面系统地讲解了 13.56MHz 线圈天线的工作原理、设计方法、设计考量以及使用 HFSS 和 CST 仿真分析线圈天线的具体操作, 同时还介绍了 13.56MHz 线圈天线匹配电路的设计和调试。通过该套课程的学习, 可以帮助您快速学习掌握 13.56MHz 线圈天线及其匹配电路的原理、设计和调试…



详情浏览: <http://www.edatop.com/peixun/antenna/116.html>

我们的课程优势:

- ※ 成立于 2004 年, 10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养, 更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授, 结合实际工程案例, 直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>