



BCM2048

PRODUCT Brief



BLUETOOTH® 2.0 + EDR SINGLE-CHIP HCI SOLUTION WITH INTEGRATED FM+RDS RADIO RECEIVER

BLUETOOTH FEATURES

- Monolithic single die integration of Bluetooth and FM Radio
- Bluetooth specification 2.0 +EDR compliant with all data packet types and lengths supported
- Best-in-class Bluetooth radio based on the proven BCM2045 core
- Supports class 1 and 2 designs
- Integrated InConcert™ 2-wire as well as industry standard 3-wire collaborative coexistence with WLAN systems
- No factory alignment required
- 5.5 Volt preregulator allows direct connect to lithium batteries
- Improved Bluetooth transport with 4-Mbaud UART
- Includes numerous enhancements for lower power dissipation
- ROM-based solution with flexible code patching
- Available in WLCSP 0.6 mm height and FPBGA <1 mm height

SUMMARY OF BENEFITS

- Bluetooth 2.0 +EDR compliant with easy migration to future specification
- Low external BOM cost and small area with 10 external RLC components. The PCB foot print is < 35 mm² area.
- Operates directly from a lithium battery or from fixed voltages down to 1.65 Volt
- Best-in-class RF performance for longest range and ease of system integration
- Full featured FM system with RDS/RBDS capability
- FM system can operate independently from Bluetooth
- Highly flexible interfaces for control and data/audio routing
- Improved power dissipation for longer battery life


FM + RDS RADIO FEATURES

- 76-MHz to 108-MHz FM bands supported (US, Europe, and Japan)
- Excellent radio performance with 1 uV sensitivity for 26 dB (S+N)/N
- FM control through either BSC-compatible interface or Bluetooth HCI
- Signal dependant stereo/mono blending
- Signal dependant soft mute
- Auto search and tuning modes
- Audio silence detection
- RSSI, IF frequency, status indicators
- RDS and RBDS demodulator and decoder with filter and buffering functions
- Operates from 32-kHz or reference clock inputs
- Flexible output interfaces including PCM, I²S, and analog stereo DAC and drivers.
- Integrated FM and RDS receiver with only one external cap, one external inductor and optional antenna matching


APPLICATIONS

- Mobile handsets and smart phones
- Personal digital assistants
- Mobile MP3 players

BCM2048 Functional Block Diagram

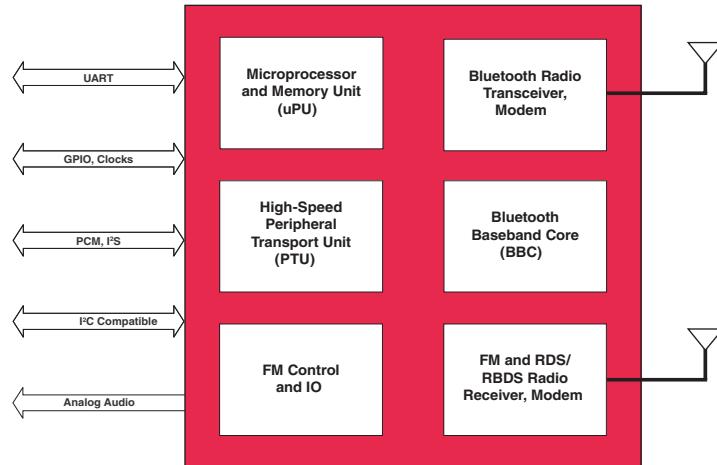

OVERVIEW

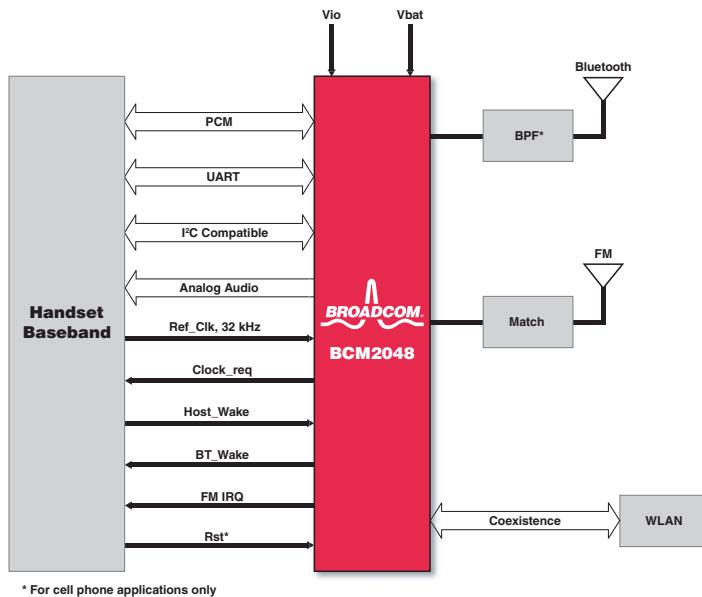

BCM2048 Block Diagram

The Broadcom BCM2048 is a monolithic 0.13 um single-chip Bluetooth® 2.0 +EDR compliant stand-alone baseband processor with an integrated 2.4-GHz transceiver, integrated FM and RDS/RBDS receiver, and an integrated FM baseband processor. It features the highest level of integration and eliminates all critical external components, thus minimizing the footprint and system cost of implementing a Bluetooth and FM solution. The BCM2048 is firmware upgradeable to future specifications.

The BCM2048 is the optimal solution for any voice and/or data application that requires the Bluetooth SIG standard Host Controller Interface (HCI) via a high-speed UART and PCM. The BCM2048 incorporates all Bluetooth 2.0 +EDR features including eSCO, AFH, fast connect, all EDR packet types and lengths, and all errata. The BCM2048 also includes InConcert and other industry collaborative coexistence solutions with WLAN systems.

The BCM2048 Bluetooth radio transceiver provides enhanced radio performance to meet the most stringent industrial temperature applications and the tightest integration into mobile handsets and portable devices. It is fully compatible with any of the standard TCXO frequencies and provides full radio compatibility to operate simultaneously with GPS and cellular radios.

The BCM2048 also integrates a complete FM and RDS/RBDS solution. The integrated solution saves power, external BOM, board space, and maximizes interface flexibility over a separate Bluetooth and FM solution. The FM subsystem can operate independently of Bluetooth and

achieve full performance while Bluetooth is operating. It is designed to cover from 76-MHz up to 108-MHz bands (US, Europe, Japan) and to operate from either the Bluetooth reference clock or a 32-kHz LPO input.

The FM subsystem supports a conventional BSC-compatible interfaces and analog outputs for legacy systems, as well as digital interface options, such as I²S and PCM. The I²S and PCM interfaces supports 48-kHz operation and can be either master or slave. The analog interface consists of high-quality line-level stereo DACs.

The BCM2048 FM subsystem includes advanced RDS/RBDS capability. The BCM2048 synchronizes, demodulates, decodes RDS/RBDS signals including CRC processing, post data filter detection, signal quality estimation, and buffering thus making it easy for an external application to read and process the RDS/RBDS data.

The FM radio reception performance is very high with 1 uV for 26 dB (S+N)/N typical sensitivity and > 60 dB SNDR capability making it easier on system integration and antenna design. The FM subsystem includes many sought-after features including signal dependant mono/stereo blend, soft mute, and signal bandwidth control. The system has digital RSSI, signal quality, and IF frequency error indicators for system monitoring. Embedded in the FM subsystem are auto search and scan features and large RDS data buffers to improve interface complexity with an external host.

The block diagram above illustrates how the BCM2048 can be used in a cellular application.

Broadcom®, the pulse logo, InConcert™, **Connecting everything®**, and the Connecting everything logo are among the trademarks of Broadcom Corporation and/or its affiliates in the United States, certain other countries and/or the EU. Bluetooth® is a trademark of the Bluetooth SIG. Any other trademarks or trade names mentioned are the property of their respective owners.

Connecting
everything®

BROADCOM CORPORATION

16215 Alton Parkway, P.O. Box 57013
Irvine, California 92619-7013

© 2006 by BROADCOM CORPORATION. All rights reserved.



射频和天线设计培训课程推荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立，致力并专注于微波、射频、天线设计研发人才的培养；我们于 2006 年整合合并微波 EDA 网(www.mweda.com)，现已发展成为国内最大的微波射频和天线设计人才培养基地，成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程，广受客户好评；并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书，帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司，以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训推荐课程列表：<http://www.edatop.com/peixun/tuijian/>



射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材；旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习，能够让学员完全达到和胜任一个合格的射频工程师的要求…

课程网址：<http://www.edatop.com/peixun/rfe/110.html>

手机天线设计培训视频课程

该套课程全面讲授了当前手机天线相关设计技术，内容涵盖了早期的外置螺旋手机天线设计，最常用的几种手机内置天线类型——如 monopole 天线、PIFA 天线、Loop 天线和 FICA 天线的设计，以及当前高端智能手机中较常用的金属边框和全金属外壳手机天线的设计，通过该套课程的学习，可以帮助您快速、全面、系统地学习、了解和掌握各种类型的手机天线设计，以及天线及其匹配电路的设计和调试…

课程网址：<http://www.edatop.com/peixun/antenna/133.html>



WiFi 和蓝牙天线设计培训课程

该套课程是李明洋老师应邀给惠普 (HP) 公司工程师讲授的 3 天员工内训课程录像，课程内容是李明洋老师十多年工作经验积累和总结，主要讲解了 WiFi 天线设计、HFSS 天线设计软件的使用，匹配电路设计调试、矢量网络分析仪的使用操作、WiFi 射频电路和 PCB Layout 知识，以及 EMC 问题的分析解决思路等内容。对于正在从事射频设计和天线设计领域工作的您，绝对值得拥有和学习！…

课程网址：<http://www.edatop.com/peixun/antenna/134.html>



CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出, 是最全面、系统、专业的 CST 微波工作室培训课程套装, 所有课程都由经验丰富的专家授课, 视频教学, 可以帮助您从零开始, 全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装, 还可超值赠送 3 个月免费学习答疑…

课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 学习培训课程套装

该套课程套装包含了本站全部 HFSS 培训课程, 是迄今国内最全面、最专业的 HFSS 培训教程套装, 可以帮助您从零开始, 全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装, 更可超值赠送 3 个月免费学习答疑, 随时解答您学习过程中遇到的棘手问题, 让您的 HFSS 学习更加轻松顺畅…

课程网址: <http://www.edatop.com/peixun/hfss/11.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程, 共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解, 并多结合设计实例, 由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS, 迅速提升个人技术能力, 把 ADS 真正应用到实际研发工作中去, 成为 ADS 设计专家…

课程网址: <http://www.edatop.com/peixun/ads/13.html>



我们的课程优势:

- ※ 成立于 2004 年, 10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养, 更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授, 结合实际工程案例, 直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>