

Cordless Voice Module Antenna : Application Note

General Description

This Application Note describes some of the antennas and basics on design that can be used with the Cordless Voice Module. PIFA antennas are explained along with information on their design and matching to the CVM output. Diversity antennas are strongly recommended for the CVM module as they offer far better reception quality and the principle of diversity is described.

Revision History

Revision 0.1
Revision 0.2

12th February, 2003
5th August, 2003


Table of Contents

Acronyms	2
Module Description	3
Types of Antennas	3
Stub Helix	4
Surface Mount Dielectric Chip	4
Printed Inverted F (PIFA).....	6
Principle of Surface Mount, Printed or Patch Antennas	6
Reference Design: Example.....	7
Diversity Recommendation for CVM.....	8
Summary	10

Acronyms

EMC	Electro-Magnetic Compatibility
DCT	Digital Cordless Telephony
DECT	Digital Enhanced Cordless Telephony
PCB	Printed Circuit Board
GSM	Global System for Mobile communications
VSWR	Voltage Standing Wave Ratio
PIFA	Printed Inverted F Antenna
BER	Bit Error Rate
CVM	Cordless Voice Module
RSSI	Receiver Signal Strength Indicator
RF	Radio Frequency
TEM	Transverse Electro-Magnetic
λ_g	Wavelength of micro-strip guided wave

Module Description

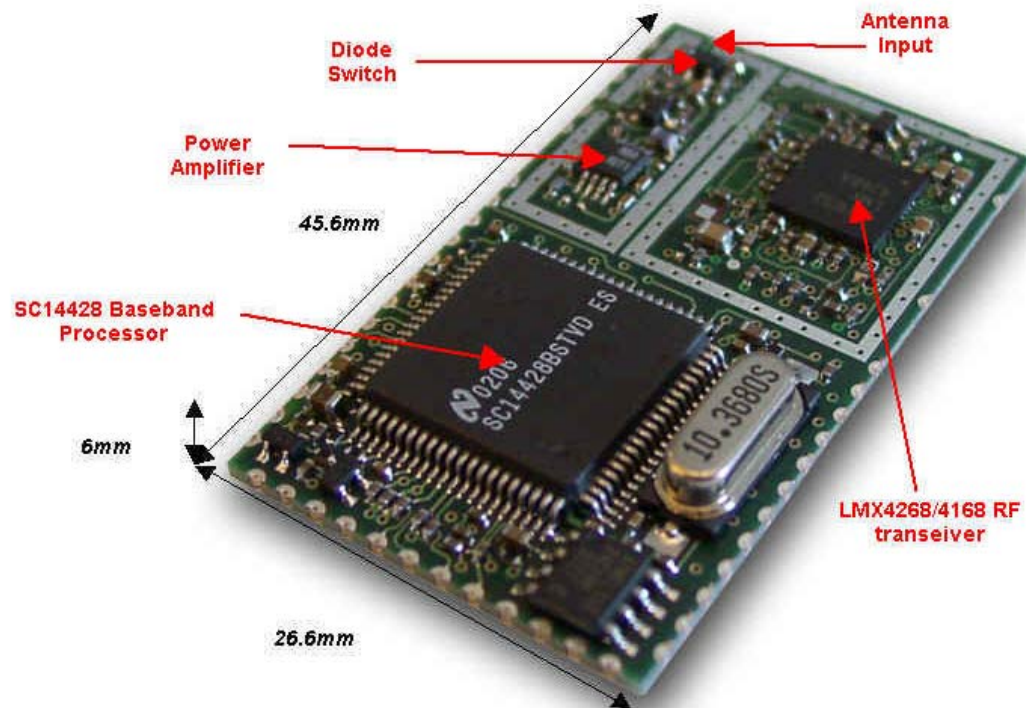


The CVM module consists of an SC14428 baseband processor, LMX4168 1.9GHz or LMX4268 2.4GHz RF transceiver, crystal oscillator, power amplifier and diode switch as shown above. The dimensions of the module are 26.6mm × 45.6mm and the transceiver plus power amplifier sections would be shielded from to meet EMC requirements. The module as a whole is designed to be mounted on a motherboard that will also contain the antenna. Different types of antennas can be used based on size and performance and a few will be discussed in this report. This report will discuss the basics of such antennas that are vital to any designer wishing to implement into their application.

Types of Antennas

1.9 and 2.4GHz antennas that can be used for DECT and DCT respectively are available in several different designs, all suitable for mobile application such as printed line, inverted F, dielectric chip surface mount and stub helix. Manufacturers that produce such antennas include Allgon, GigaAnt, Yokowo, Mitsubishi, Rangestar and several others that will also make custom designs if the volumes are large enough.

Stub Helix

This type of antenna is most commonly used for GSM mobile phones, but tuned to 1.9 and 2.4GHz, it has excellent RF performance in terms of bandwidth and efficiency of radiation and has only one connection point to the main PCB. It does not require a ground connection or a ground plane and because of its large bandwidth it will not easily be de-tuned by user handling. But like all the antennas mentioned in this report, it does need tuning to the individual mechanics of the application in which it is being used. Different shapes and materials used for the chassis will distort the radiation pattern and pull the center frequency of the antenna. This is one disadvantage of helix antennas, because they are more difficult to tune than a printed antenna where the resonant length can be easily changed.

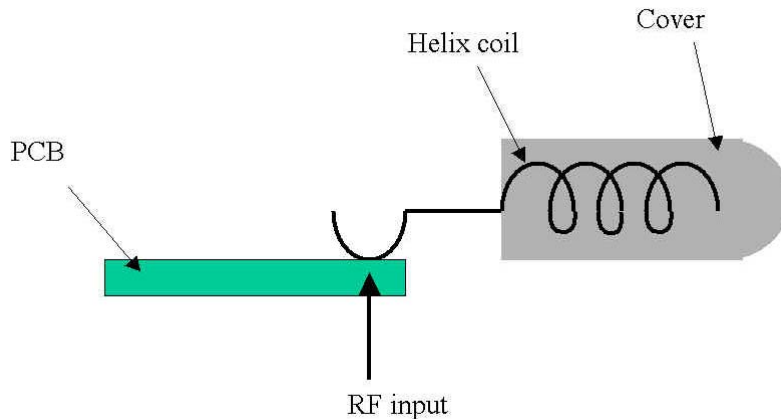

The negative point of course with this type of antenna is that its not low profile, it projects from the side of the PCB. For this reason they are often not used for mobile applications.


Surface Mount Dielectric Chip

A low profile, smaller, lighter and cheaper antenna is the dielectric chip antenna, this consists of a high dk dielectric slab with the active element printed on top. The reason for using a dielectric slab rather than printing the element on the PCB directly is that it is smaller due to the concentrated electric field within the dielectric material. This type of antenna is low profile and can be machine mounted during assembly, but it does not yield as good performance as the stub helix. Being small means narrow bandwidth, worse efficiency and easily de-tuned through handling.


Even though the antenna element is quite small (approx. 12x2mm) the size of the whole antenna is much larger because of the ground plane required for the antenna to function correctly. In addition to this, a certain copper free clearance needs to be maintained around the radiating element both in a horizontal plane as shown in the diagram and some clearance in the vertical plane. The results of making the ground plane or copper free area too small will be reduced bandwidth and as a rule of thumb, the antenna should have a bandwidth which covers the entire DECT or DCT band with VSWR<2.5.

Typical Requirement Specifications;


- **Bandwidth** – As mentioned this should cover the entire band with VSWR<2.5, however, small bandwidth antenna will be prone to de-tuning effects hence the bandwidth should ideally be larger than this (see graph below). If the required bandwidth cannot be achieved then either the antenna ground area and/or the radiating element is too small. A matching network maybe also be required in addition, this should be placed as close as possible to the antenna input.
- **Radiation Efficiency** – Anything greater than 70% would be considered good. Small mobile antennas will certainly have worse efficiency than larger $\lambda_g/2$ or full λ_g antennas.
- **Radiation Pattern** – Should be omni directional for mobile applications. But the pattern of small antennas ($L < \lambda_g$) is difficult to control and may have an erratic shape, but this is not a serious issue.

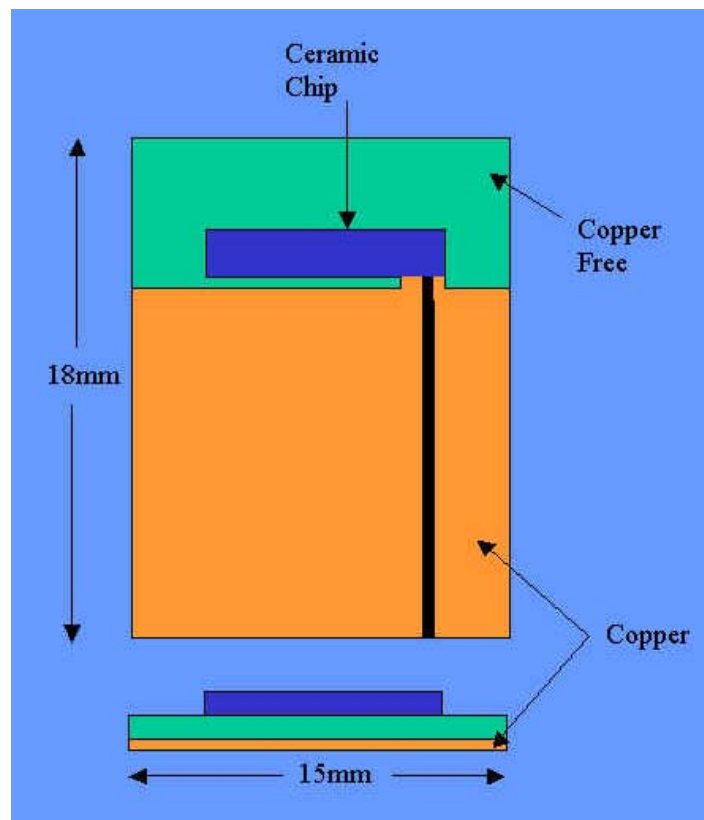

2.4GHz antenna




Radiating element (chip).

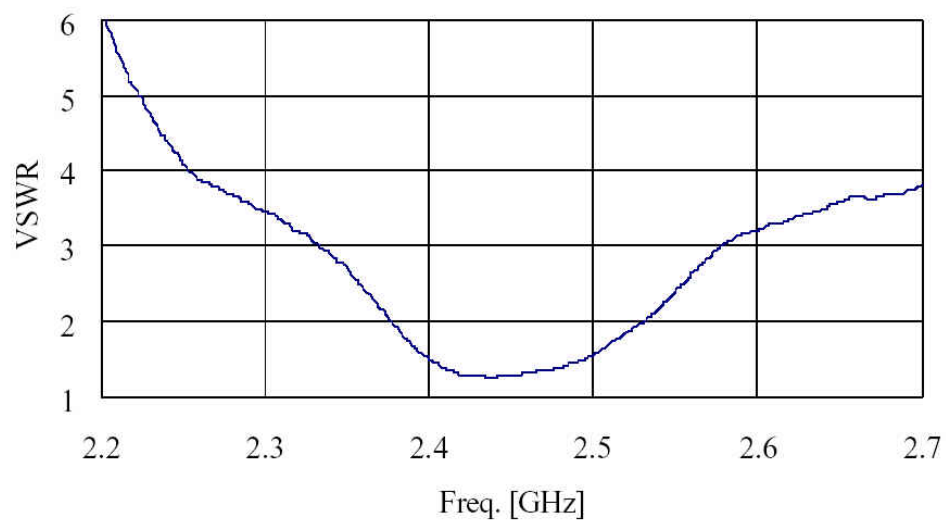

VSWR into antenna port.


Printed Inverted F (PIFA)

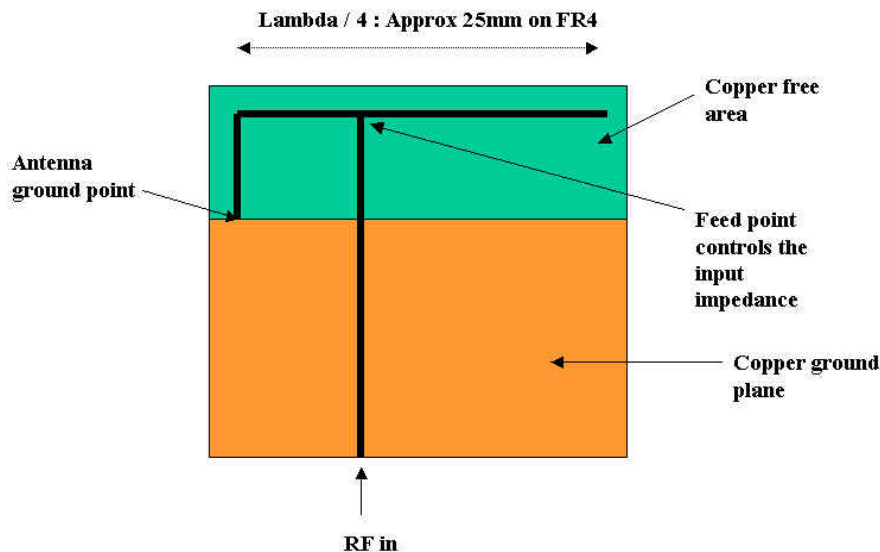

A PIFA antenna is shown above. The main radiating element is $\lambda/4$ in this case, or it could be half or full λ for better RF performance. The back of the element is grounded with through via's placed close to the grounding point to give a good RF ground, this is to provide a node where the electric field is close to zero. The radiating element being quarter wavelength will produce an anti-node on its other end where the electric field is strongest, hence this end of the element will become the active radiating region of the antenna. An area of ground plane and copper clearance is again required to give the antenna its required bandwidth. The antenna element is approximately 25mm long since it is printed on FR4, this is considerably larger than the dielectric chip, but of course this kind of antenna will be cheaper to manufacture than the dielectric chip at the expense of size. The position of the feed point along the element will control its input impedance to a certain extent and can be used as a tool for matching along with the antenna dimensions and a discrete matching network.

Principle of Surface Mount, Printed or Patch Antennas


All such antennas work on a similar principle, radiating element, clearance around the element (top and bottom) plus a ground plane on one side. It is necessary to create a fringing E-field with a large arc to give rise to radiation emission, else the field will be contained and non-radiating.

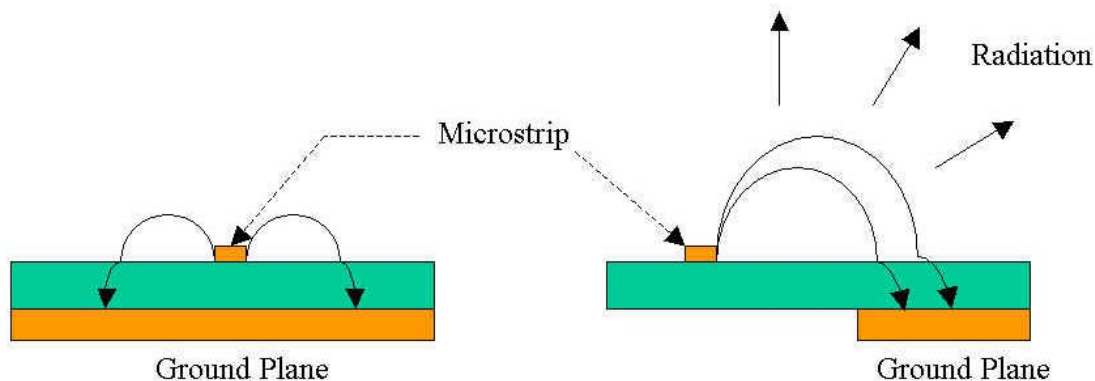

Consider a micro-strip line as shown above and the electric field lines that run from it through the dielectric substrate to ground. Although micro-strips do radiate a little, they are not good antennas by themselves. In order to turn them into good radiators it is necessary to move the ground plane from under the strip-line, hence forcing the electric field to arc over a greater distance, and it is this arcing field that produces the radiation. If the ground plane is moved too far, then the electric field would cease altogether, therefore there is a critical distance.

Reference Design: Example

The physical dimensions of the antenna are predominantly governed by three factors, the frequency of resonance, the dielectric constant of the substrate on which the antenna element is printed and the thickness of the substrate. High frequency obviously means smaller dimensions, also high dielectric constant and thick substrate means the field lines are more densely packed, which means smaller physical size. In this example for the CVM module (at 2.45GHz center frequency) the relative dielectric constant is 4.3 and the thickness of the substrate is 1mm.

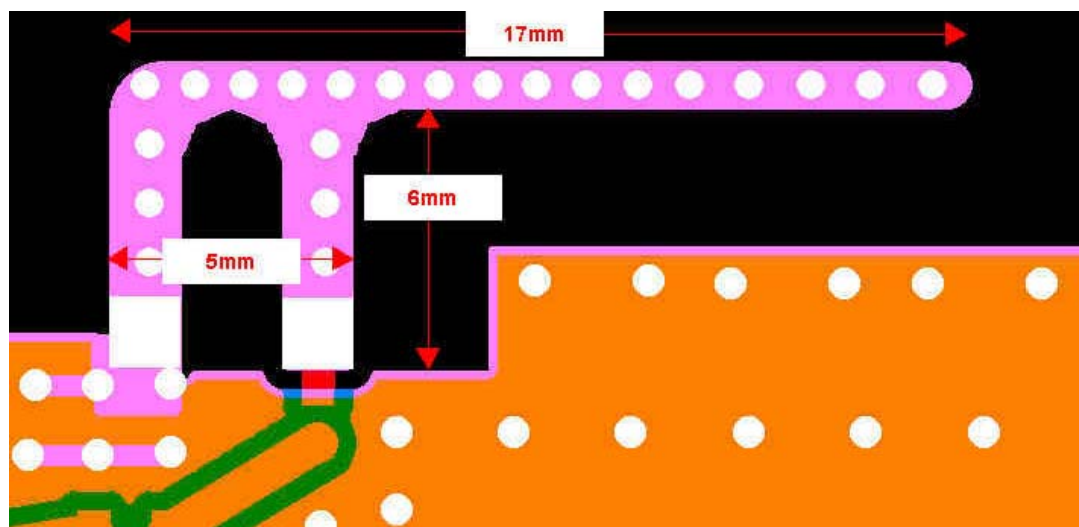


In this case the maximum dimension of the antenna is 17mm, $\lambda_g/4$. The antenna could also be 34 or 68mm long, $\lambda_g/2$ and full λ_g respectively, depending on space available. The advantage of making it larger is greater bandwidth and immunity to de-tuning.

Diversity Recommendation for CVM


In mobile applications, the DECT/DCT handset is constantly in a state of motion, this results in fading and Doppler. Fading is when radiation reflected from multiple surfaces is combined at the receiving antenna either constructively or destructively interfere giving a rapidly varying signal level at the receiver input. Doppler is when the frequency of the carrier is shifted slightly during fast movement away from or towards the receiver, because the TEM wave is compressed or stretched. The effect of both and particularly fading is reception difficulty and increased BER, in extreme conditions or when the signal level is weak, the link maybe dropped altogether.

One method to compensate this is through the use of diversity, which consists of two antennas placed at least 15 to 20mm apart and/or perpendicular to each other. The two antennas are connected to the receiver by means of a pin diode switch and are monitored for signal level at the start of each burst, the antenna with the highest level is then selected for data reception.

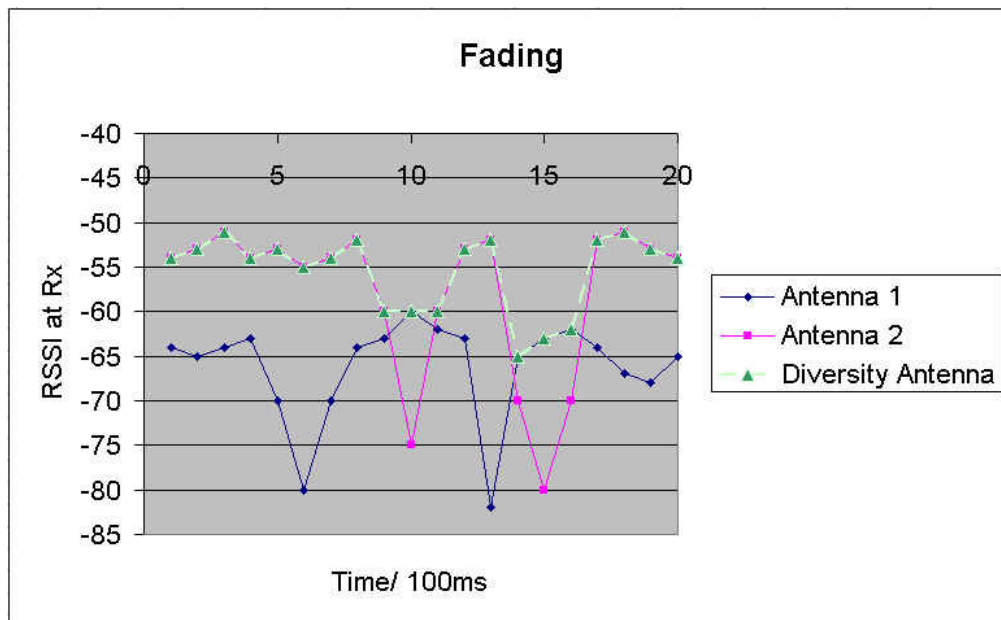


We see from this example that when the RSSI level of antenna 2 drops lower than antenna 1, the switch is made to the higher RSSI. Hence the diversity arrangement prevents the signal from dropping too low during a fade since it is very unlikely that both antennas will go through a null at the same time, since they are separated slightly and are arranged perpendicularly.

Although the diversity arrangement is recommended for the CVM module, it comes at the expense of having two antennas and greater use of PCB real estate.

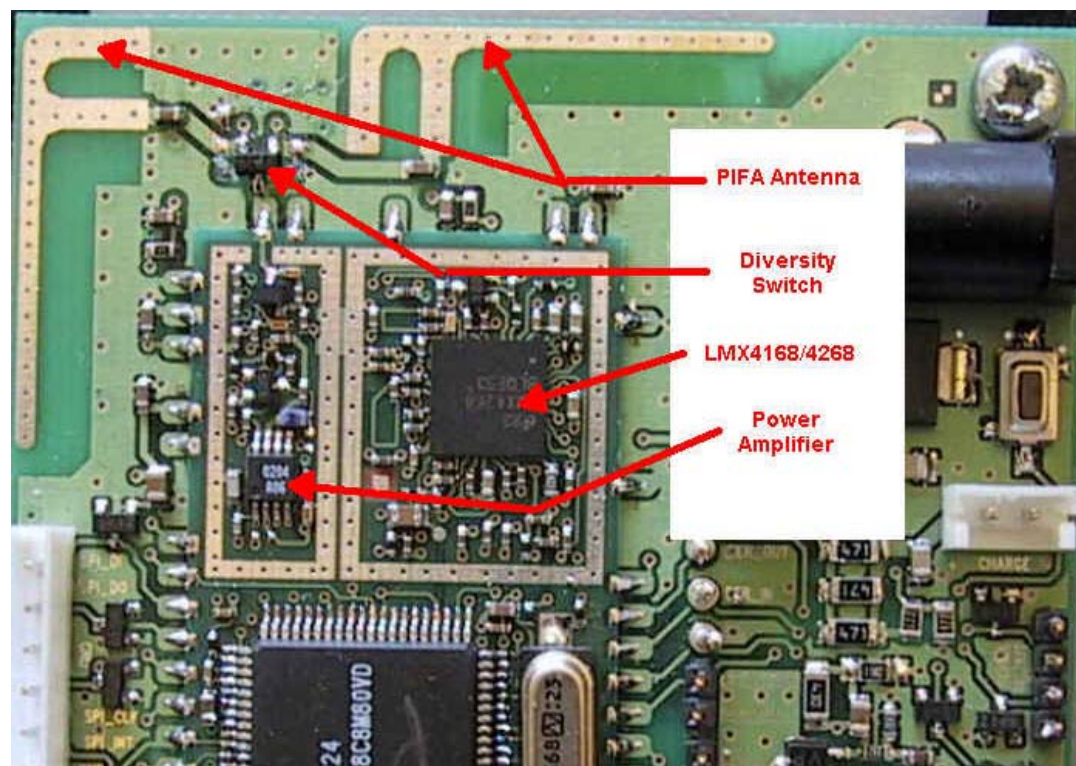

The RSSI in this case is measured during pre-amble and logic signals from the baseband is applied to the pin-diode switch which causes it to switch to either antenna depending on the highest RSSI measured. The data burst can then be received with the best signal quality.

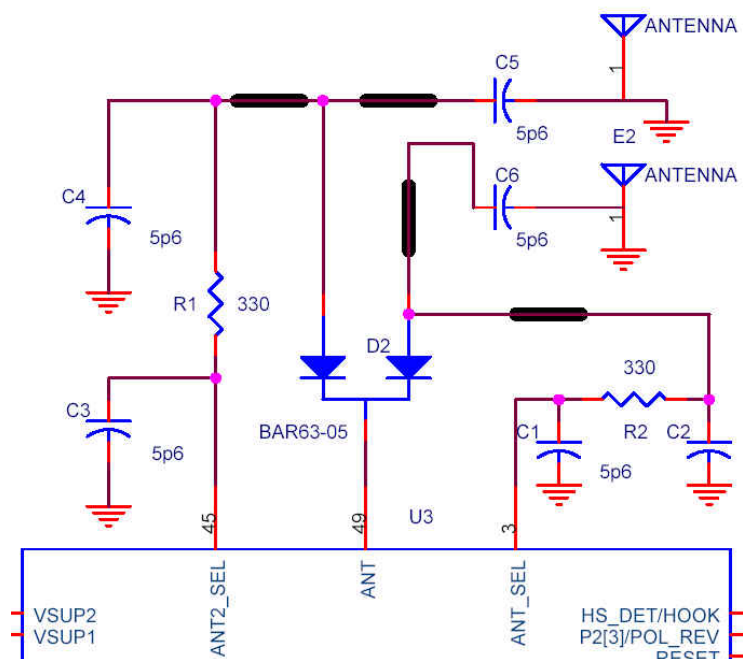

Ant_sel and Ant2_sel are the logic signals that bias the diode pair D2 to conducting or non-conducting states, hence select the appropriate antenna.

Summary

Three types of antennas have been considered for use with the CVM module;

Type of Antenna	Performance	Profile	Cost	Physical Size
Stub Helix	Good bandwidth and efficiency, does not require matching network.	High: Projects from the side of the PCB	High	2.4GHz antenna is approximately 15mm long, but projects, does not need ground plane to function
Surface mount ceramic chip	Reasonable performance on $\lambda/4$. Small bandwidth and reduced efficiency, can become de-tuned during handling	Low: Can be machine mounted during assembly, no more than 0.5mm thick	Medium	Element for 2.4GHz is approximately 12mm long, but needs ground area and clearance around active region
Printed Inverted F	Reasonable performance on $\lambda/4$. Small bandwidth and reduced efficiency, can become de-tuned during handling	Lowest: Printed on PCB	Low	Element for 2.4GHz is approximately 25mm long, but needs ground area and clearance around active region

In mobile applications, diversity is recommended to give good signal level at all times and avoid fading nulls that can corrupt or drop the link altogether. Any of the above antennas mentioned can be used for diversity as long as they are placed at least 15 to 20mm apart and/or perpendicular to each other.

Points for Consideration

- Surface mount chips or PIFA antennas require ground plane and clearance around the radiating element.
- Larger antennas, ie/ full λ for half λ will have better efficiency and bandwidth than smaller antennas.
- Small antennas are prone to de-tuning due to their narrow bandwidths. Certain volume clearance should be maintained around the active element.
- Even plastic chassis can cause de-tuning and loss of radiated power if it comes too close to the active element.
- The resonant length of the antenna will be affected by the shape and size of the chassis and also the material that it is composed of. The antenna therefore needs to be designed with the application for which it is being used.
- Handset antennas will almost certainly be de-tuned when handling, amount of de-tuning is dependent on the distance of the hand and head to the active part of the antenna.
- Chassis around the antenna should not be metalised in any way.
- 3 or 5 element matching network can be used to increase the bandwidth into the antenna or match to the strip-line.

射频和天线设计培训课程推荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立,致力并专注于微波、射频、天线设计研发人才的培养;我们于 2006 年整合合并微波 EDA 网(www.mweda.com),现已发展成为国内最大的微波射频和天线设计人才培养基地,成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程,广受客户好评;并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书,帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司,以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训课程列表: <http://www.edatop.com/peixun/rfe/129.html>



射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材;旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习,能够让学员完全达到和胜任一个合格的射频工程师的要求...

课程网址: <http://www.edatop.com/peixun/rfe/110.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程,共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解,并多结合设计实例,由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS,迅速提升个人技术能力,把 ADS 真正应用到实际研发工作中去,成为 ADS 设计专家...

课程网址: <http://www.edatop.com/peixun/ads/13.html>



HFSS 学习培训课程套装



该套课程套装包含了本站全部 HFSS 培训课程,是迄今国内最全面、最专业的 HFSS 培训教程套装,可以帮助您从零开始,全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装,更可超值赠送 3 个月免费学习答疑,随时解答您学习过程中遇到的棘手问题,让您的 HFSS 学习更加轻松顺畅...

课程网址: <http://www.edatop.com/peixun/hfss/11.html>

CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出,是最全面、系统、专业的 CST 微波工作室培训课程套装,所有课程都由经验丰富的专家授课,视频教学,可以帮助您从零开始,全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装,还可超值赠送 3 个月免费学习答疑...

课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 天线设计培训课程套装

套装包含 6 门视频课程和 1 本图书,课程从基础讲起,内容由浅入深,理论介绍和实际操作讲解相结合,全面系统的讲解了 HFSS 天线设计的全过程。是国内最全面、最专业的 HFSS 天线设计课程,可以帮助您快速学习掌握如何使用 HFSS 设计天线,让天线设计不再难...

课程网址: <http://www.edatop.com/peixun/hfss/122.html>

13.56MHz NFC/RFID 线圈天线设计培训课程套装

套装包含 4 门视频培训课程,培训将 13.56MHz 线圈天线设计原理和仿真设计实践相结合,全面系统地讲解了 13.56MHz 线圈天线的工作原理、设计方法、设计考量以及使用 HFSS 和 CST 仿真分析线圈天线的具体操作,同时还介绍了 13.56MHz 线圈天线匹配电路的设计和调试。通过该套课程的学习,可以帮助您快速学习掌握 13.56MHz 线圈天线及其匹配电路的原理、设计和调试...

详情浏览: <http://www.edatop.com/peixun/antenna/116.html>



我们的课程优势:

- ※ 成立于 2004 年,10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养,更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授,结合实际工程案例,直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>