

Low Capacitance Transient Voltage Suppressor

Description

The PSAC Series are low capacitance transient voltage suppressors for high speed data interface that designed to protect sensitive electronics from damage or latch-up due to lightning, and other voltage induced transient events.

All pins are rated to withstand 25kv ESD pulses using the IEC61000-4-2 contact discharge method, which can meet the requirement of level 4.



Feature

- 800W peak pulse power capability with a 10/1000us waveform, repetition rate (duty cycle): 0.01%
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated junctions
- Excellent clamping capability
- Low incremental surge resistance
- Fast response time: typically less than 1.0ns from 0 Volts to V_{BR}
- Ideal for data line applications

Electrical characteristics per line@25°C (unless otherwise specified)

Device	V_{RWM} (NOTE1)	V_{BR} @1mA	I_R @ V_{RWM}	V_C @ $I_{PP} = 5A$	V_{PIB}	I_{PP} (Per FIG.3)	V_{WIB}	I_{IB} @ V_{WIB}	C_j @0V, 1MHz
	(V)	(V)	(μA)	(V)	(V)	(A)	(V)	(V)	(pF)
PSAC5.0	5.0	7.60	300	10.0	100	44	75	1.0	25
PSAC6.0	6.0	6.90	300	11.2	100	41	75	1.0	25
PSAC7.0	7.0	8.33	300	12.6	100	38	75	1.0	25
PSAC8.0	8.0	8.89	100	13.4	100	36	75	1.0	25
PSAC8.5	8.5	9.44	50	14.0	100	34	75	1.0	25
PSAC10	10	11.10	5.0	16.3	100	29	75	1.0	25
PSAC12	12	13.30	5.0	19.0	100	25	75	1.0	25
PSAC15	15	16.70	5.0	23.6	100	20	75	1.0	25
PSAC18	18	20.00	5.0	28.8	100	15	75	1.0	25
PSAC22	22	24.40	5.0	35.4	100	14	75	1.0	25
PSAC26	26	28.90	5.0	42.3	100	11.1	75	1.0	25
PSAC30	30	33.30	5.0	48.6	100	10.0	75	1.0	25
PSAC36	36	40.00	5.0	60.0	100	8.6	75	1.0	25
PSAC45	45	50.00	5.0	77.0	200	6.8	150	1.0	25
PSAC50	50	55.50	5.0	88.0	200	5.8	150	1.0	25

Electrical characteristics:

V_{RWM}	Stand-off Voltage
V_{BR}	Minimum Breakdown Voltage
I_R	Maximum Reverse Leakage
V_C	Maximum Clamping Voltage
V_{PIB}	Peak Inverse Blocking Voltage
I_{PP}	Maximum Peak Pulse Current
V_{WIB}	Working Inverse Blocking Voltage
I_{IB}	Inverse Blocking Leakage Current
C_j	Maximum Junction Capacitance



Absolute maximum rating@25°C


Rating	Symbol	Value	Units
Peak pulse power dissipation with a 10/1000us waveform (NOTE 1)	P_{PPM}	800	W
Steady state power dissipation at $T=75^{\circ}\text{C}$ With lead lengths or 0.375" (9.5mm)	$P_{M(AV)}$	3.0	W
Peak pulse power surge current with a 10/1000us waveform (NOTE 1, FIG. 3)	I_{PP}	SEE TABLE1	A
Operating junction and Storage Temperature	T_J, T_{STG}	-55 to +150	$^{\circ}\text{C}$

NOTES:


(1)Non-repetitive current,per Fig.3 and derated above $T_A=25^{\circ}\text{C}$ per Fig.2

Typical Characteristics

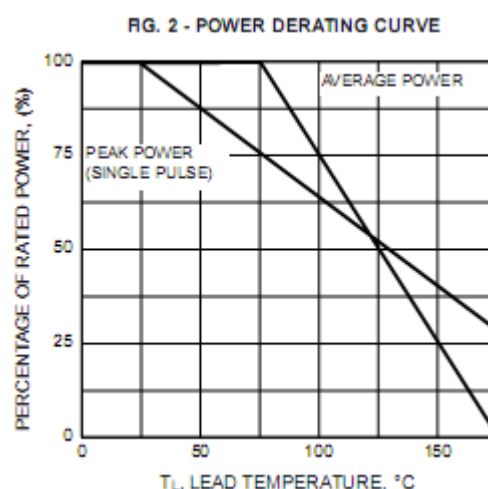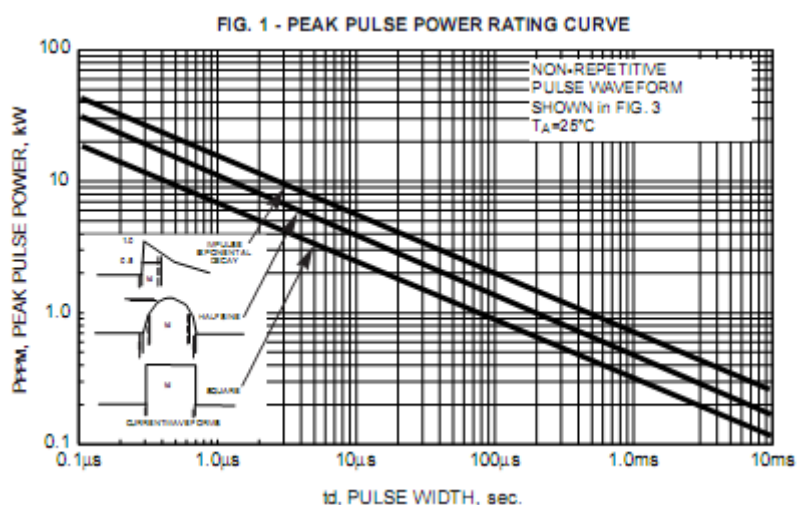

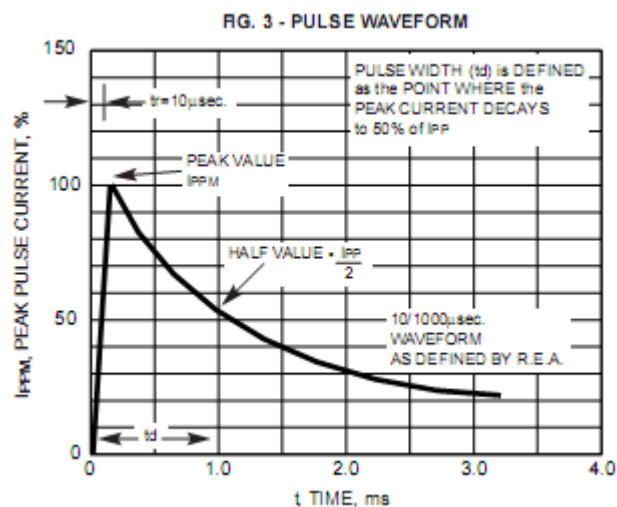

Package dimension

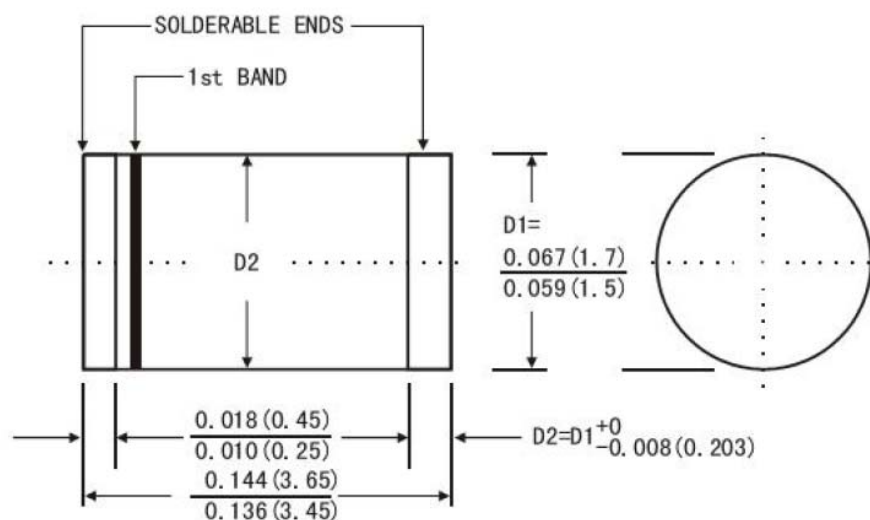

MiniMELF (DO-213AA) Plastic Package

IMPORTANT NOTICE

 and **Prisemi** are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)** ,Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**® is a registered trademark of Prisemi Electronics.

All rights are reserved.

射频和天线设计培训课程推荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立,致力并专注于微波、射频、天线设计研发人才的培养;我们于 2006 年整合合并微波 EDA 网(www.mweda.com),现已发展成为国内最大的微波射频和天线设计人才培养基地,成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程,广受客户好评;并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书,帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司,以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训推荐课程列表: <http://www.edatop.com/peixun/tuijian/>



射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材;旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习,能够让学员完全达到和胜任一个合格的射频工程师的要求...

课程网址: <http://www.edatop.com/peixun/rfe/110.html>

手机天线设计培训视频课程

该套课程全面讲授了当前手机天线相关设计技术,内容涵盖了早期的外置螺旋手机天线设计,最常用的几种手机内置天线类型——如 monopole 天线、PIFA 天线、Loop 天线和 FICA 天线的设计,以及当前高端智能手机中较常用的金属边框和全金属外壳手机天线的设计;通过该套课程的学习,可以帮助您快速、全面、系统地学习、了解和掌握各种类型的手机天线设计,以及天线及其匹配电路的设计和调试...

课程网址: <http://www.edatop.com/peixun/antenna/133.html>



WiFi 和蓝牙天线设计培训课程



该套课程是李明洋老师应邀给惠普 (HP)公司工程师讲授的 3 天员工内训课程录像,课程内容是李明洋老师十多年工作经验积累和总结,主要讲解了 WiFi 天线设计、HFSS 天线设计软件的使用,匹配电路设计调试、矢量网络分析仪的使用操作、WiFi 射频电路和 PCB Layout 知识,以及 EMC 问题的分析解决思路等内容。对于正在从事射频设计和天线设计领域工作的您,绝对值得拥有和学习!...

课程网址: <http://www.edatop.com/peixun/antenna/134.html>

CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出,是最全面、系统、专业的 CST 微波工作室培训课程套装,所有课程都由经验丰富的专家授课,视频教学,可以帮助您从零开始,全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装,还可超值赠送 3 个月免费学习答疑...

课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 学习培训课程套装

该套课程套装包含了本站全部 HFSS 培训课程,是迄今国内最全面、最专业的 HFSS 培训教程套装,可以帮助您从零开始,全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装,更可超值赠送 3 个月免费学习答疑,随时解答您学习过程中遇到的棘手问题,让您的 HFSS 学习更加轻松顺畅...

课程网址: <http://www.edatop.com/peixun/hfss/11.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程,共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解,并多结合设计实例,由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS,迅速提升个人技术能力,把 ADS 真正应用到实际研发工作中去,成为 ADS 设计专家...

课程网址: <http://www.edatop.com/peixun/ads/13.html>



我们的课程优势:

- ※ 成立于 2004 年,10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养,更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授,结合实际工程案例,直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>