

UHF RFID Antennas for Printer-Encoders—Part 2: Antenna Types

By Boris Y. Tsirline
Zebra Technologies Corporation

Understanding antenna performance is one key to obtaining accurate and reliable writing of RFID tags, especially in a high-volume automated system

Part 2 of this article continues the discussion of RFID antennas with a look at the operating environment of antenna and its associated RFID tag printer-encoder. Readers

may wish to have Part 1 available to follow the author's references to earlier comments and figures.

3. UHF Printer-Encoder Environment

Smart Label design restricted by the antenna-transponder interaction in very close proximity is complicated further by the Printer-Encoder environment. A common architecture of a thermal transfer UHF RFID Printer-Encoder (Fig. 5) yields an arrangement of four key internal areas: the *media supply zone*, the *following adjacent transponders zone*, the *targeted transponder zone* and the *encoded transponder zone*. This representation assumes that the antenna is positioned underneath the printhead and behind the platen roller. During printer operation, the transponders pass through the zones sequentially from the media roll to the printhead. Each zone can be active or inactive in terms of its ability to activate the transponders located in it. The zone lengths are correlated to the printer structure, the antenna construction and its dimensions. Consequently the zones impact the Smart Label design and impose constraints on the minimum Smart Label *pitch* and on the two transponder placement parameters: the *placement starting distance* and the *transponder placement range* (Fig. 1).

Media supply zone usually has a fixed

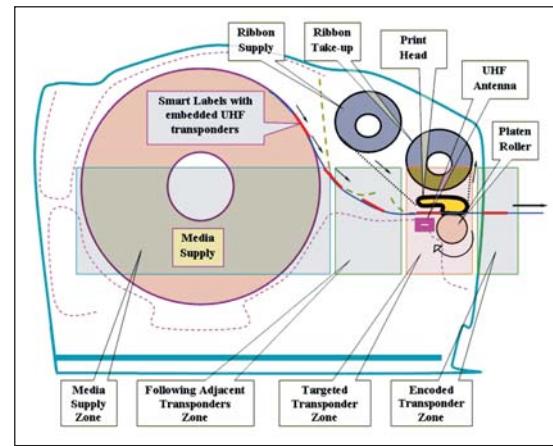


Figure 5 . Common architecture of thermal transfer UHF RFID Printer-Encoder.

length. This zone is relatively far away from the antenna and is inactive. In case of parasitic activation of the transponders in this zone, the simplest solution regardless of the antenna and label dimensions is shielding.

Following adjacent transponders zone has a variable length. Typically the design goal is to make this inactive zone as long as possible in order to be able to process densely spaced short labels and achieve a short pitch. If an antenna positioned right after the platen roller has intensive radiation or an extensive longitudinal length, the inactive *following adjacent transponders zone* shrinks. In this case the printer can still process narrow labels but with an extended *transponder placement range*. The printer requires an increased *pitch* on the liner (Fig. 1(b)). This approach leads to a noticeable waste of liner material and limits the minimum label length. In order to protect the transponders against activation in this

zone shielding component may be used. The disadvantage of a shielding solution is that the geometries of the shielding components depend on the transponder dimensions and involve adjustment for every new transponder form-factor.

Targeted transponder zone generally depends on the antenna and the transponder dimensions as well as the Reader's RF power. This zone is active, of course. When the antenna occupies much of the space between the platen roller and the media supply roll, the *targeted transponder zone* is relatively long. An extended *targeted transponder zone* requires either a long label or an outsized pitch in order to avoid collisions or transponder re-encoding with the wrong data. A short antenna, closely positioned to the platen roller, affords a short *placement starting distance* for the transponders and their short *transponder placement range*.

Relatively short labels often have a partition distance between them that is only a fraction of their width (Fig. 1(d)). Consequently, transponders embedded into such labels are grouped close to each other. In this dense arrangement all transponders can be activated simultaneously by a "low" resolution antenna. The long range RFID systems commonly employ an anti-collision technique for processing a group of transponders. This technique is impractical for Printer-Encoders because it is unable to identify single targeted transponder. Only an antenna with spatial selectivity can work with a single closest transponder without activating the adjacent ones. The higher the spatial selectivity of an antenna, the shorter the *transponder placement range*. In the best case the *transponder placement range* can equal the transponder's width. The shielding components can also be used to form the *targeted transponder zone* or to limit its longitudinal length with the same disadvantages as for the *following adjacent transponders zone* application described above.

Encoded transponder zone length mainly depends on the antenna field strength and the printer components surrounding this area. The *encoded transponder zone* should be inactive. The antennas with highly intensive electro-magnetic field and some printer components with the wave re-radiating ability can inadvertently make this zone active. In this case every encoded and printed label must be either peeled or torn off in order to prevent the transponders collision or an incorrect re-encoding. The need to take off the encoded transponders prohibits printer operation in the batch processing mode. Alternatively the label pitch may be increased such that the encoded transponder leaves this zone when the next transponder arrives for an encoding. The application of the shielding components suppressing electro-magnetic field in the *encoded transponder zone* imposes functional limitations on the printer. For example, the shielding elements mounted in this zone conflict with the use of an external cutter.

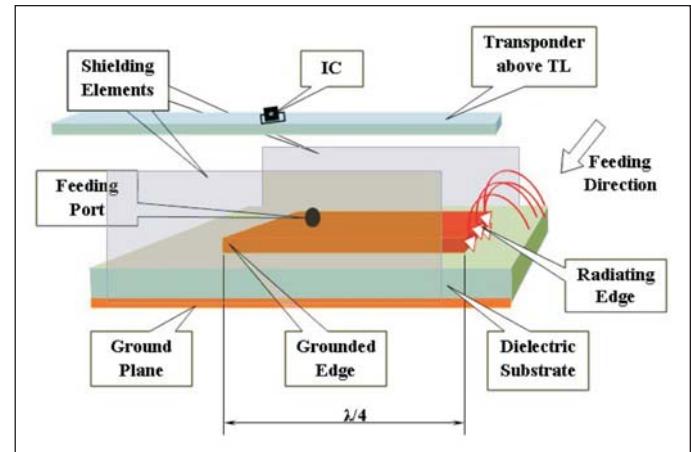


Figure 6 · Open Transmission Line antenna— $\lambda/4$ wavelength microstrip patch.

Two criteria are proposed for the integral characterization of relations between the antennas construction, the printer zone dimensions and the Smart Label design parameters. The first criterion is the *antenna structural feasibility*, which reflects the space required for the antenna installation and designates the interval occupied by the antenna along a transponder's path. The second criterion is the *transponder placement boundaries*, which characterizes the antenna spatial selectivity and the associated transponder placement parameters of the Smart Label.

These four criteria established above are intended to be utilized for the comprehensive study and comparison of the existing UHF antennas for stationary and mobile RFID Printer-Encoders and also to determine the correlation between the printer encoding function and the Smart Label parameters limitations.

4. UHF Antennas for Stationary Printer-Encoders

Microstrip, stripline and others PCB transmission lines developed primarily for RF energy transfer have become accepted as antennas by UHF Printer-Encoders and by other RFID close proximity applications. Their planar structure, ability to handle relatively high RF power and inexpensive, precise fabrication process enable easy integration. Any transmission line antenna significantly changes its behavior and electrical properties depending on the line length and its terminating status. There are two TL antenna types: *Open TL* type based on the open TL and *Terminated TL* type—antennas based on the loaded TL.

Antenna Based on Open TL

An Open TL antenna type is represented by a quarter-wavelength microstrip patch antenna (Fig. 6) [21], [22]. The patch antenna for close proximity applications differs

from a conventional patch antenna in having shielding components along the non-radiating patch sides and a much narrower radiating edge in order to decrease field strength in radiating near- and far-field zones.

Antenna Structural Feasibility

This antenna is based on PCB and enclosed in shielding case with one open side. The antenna is arranged in parallel with a transponder in an encoding area and resides in interval of 20-25 mm (including its mounting components) behind the platen roller.

Transponder Placement Boundaries

The antenna is positioned close to the platen roller and provides a short *transponder placement range* and *placement starting distance*, which allows the processing of short Smart Labels with a short pitch.

The antenna shielding elements are engaged to limit the transponder interrogation interval. Electro-magnetic shielding is probably the oldest method of insulating the transponder designated encoding area. In RFID technology shielding was initially employed for selective single transponder testing in the presence of others [23]. The shielding disadvantage appears when transponder form-factors change frequently, for example, for different label sizes, and so do the geometries of the shielding elements.

Encoding Field Intensity

Parallel alignment of the antenna with a transponder in the encoding area ensures improved coupling. However, because electrical charges are highly accelerated at the open edge of the antenna, it has very strong reactive and radiating near-field intensity. The antenna energy efficiency is very high and a transponder encoding at 5-10 mm from the antenna requires a few milliwatts of the Reader RF power. Shielding elements create losses in the antenna near-field and change its distribution around the antenna. Shielding reduces energy in the area of adjacent transponders but works inefficiently for radiating near- field. A strong antenna electric field can potentially activate the transponders in *encoded transponder zone* or in *following adjacent transponders zone* (Fig. 5) and thus this antenna requires RF power control to reduce this field. The collision risk drives the Reader operational RF power down to the level that is insufficient to activate transponders in the adjacent zones and significantly decreases system power margin as illustrated by Antenna #1 in Figure 3. Magnetic field mostly concentrated near the grounded edge partly contributes to the transponder activating power.

Impedance Bandwidth

Antenna feeding port impedance match is achieved by finding the appropriate point close to the grounded edge

of the patch (Fig. 6). Bandwidth of patch antennas without a shield is narrow, approximately 30 to 50 MHz. In order to tolerate parameter deviations the geometry of every antenna must be adjusted for frequency tuning and impedance matching.

Antennas Based on Terminated TL

In contrast to Open TL, antennas based on Terminated TL could be resonant or not-resonant. They may have wide or narrow bandwidths depending on the TL length and the terminating load value. In the most common case a terminated TL exhibits three specific features that have defined three trends in UHF antenna development for very close proximity RFID applications. These features are related to the TL input impedance.

The input impedance Z_{IN} of any loss-free TL having characteristic impedance Z_C , a length l and terminated by a load Z_L in general is described [24] as

$$Z_{IN} = Z_C \left(\frac{Z_L + jZ_C \tan \beta l}{Z_C + jZ_L \tan \beta l} \right) \quad (4)$$

where β is the phase constant, which for a uniform, loss-free TL is inversely proportional to a wavelength λ and is given by

$$\beta = \frac{2\pi}{\lambda} \quad (5)$$

Substituting (5) in (4) we obtain:

$$Z_{IN} = Z_C \left(\frac{Z_L + jZ_C \tan \frac{2\pi}{\lambda} l}{Z_C + jZ_L \tan \frac{2\pi}{\lambda} l} \right) \quad (6)$$

There are three conclusions of interest from equation (6).

1. If TL characteristic impedance Z_C meets the condition:

$$Z_C = Z_L \quad (7)$$

Then substitution of (7) in equation (6) gives:

$$Z_{IN} = Z_L \quad (8)$$

In reference to (8) the impedance Z_{IN} is theoretically independent of TL length and equal to the terminating load for any frequency. Although in reality the bandwidth is limited by parasitic effects associated with non-ideal TL components, it can easily reach 5 to 6 GHz. In this case voltage standing wave ratio (VSWR) of the TL is about 1; voltage along the whole TL length is equal to the

input voltage. The electric field strength distribution around the TL is also homogeneous.

2. If the TL length is a quarter-wavelength:

$$l = \lambda / 4 \quad (9)$$

Substituting $\beta l = \pi/2$, from (5) and (9) in (6) obtain:

$$Z_{IN}(f_0) = \frac{Z_C^2}{Z_L} \quad (10)$$

The ability of TL to transform load impedance (10) is widely used for impedance matching in the vicinity of one particular operational frequency (f_0).

3. If the TL length satisfies the condition:

$$l = \lambda / 2 \quad (11)$$

Substituting $\beta l = \pi$, from (5) and (11) in (6) obtain:

$$Z_{IN}(f_0) = Z_L \quad (12)$$

Equation (12) is valid for any impedance value Z_C for one particular frequency f_0 . TL experiences a standing wave with $SWR \geq 1$ depending on how much impedance Z_C differs from impedance Z_L . In an extreme case for a huge mismatch $SWR \gg 1$, the voltage amplitudes near the edges of a $\lambda/2$ wavelength TL are in anti-phase and can attain almost a double the input voltage value. This voltage amplification increases the electric field strength immediately adjacent to the TL and for $SWR \gg 1$ is almost equivalent to the input power increase of up to 4 times for the matched TL.

Antennas Based on Terminated Non-Resonant TL

The so-called Terminated Non-Resonant TL antennas are presented by "Two-Wire" TL [25] (Fig. 7(a)) formed by two PCB traces and by a combined arrangement of two microstrip transmission lines [26] (Fig. 7(b)). This group of antennas utilizes the TL phenomena (8). For all antennas based on terminated TL, their electrical charges slowly accelerate at the edges. Therefore, the antennas have a weak radiating near- and far-field intensity, while high current provides relatively strong reactive near-field.

Antenna Structural Feasibility

Both antennas, based on a highly technological PCB fabrication process, have an orthogonal alignment of their traces with the targeted transponder. Their structures take up to 45-60 mm in longitudinal length (including the

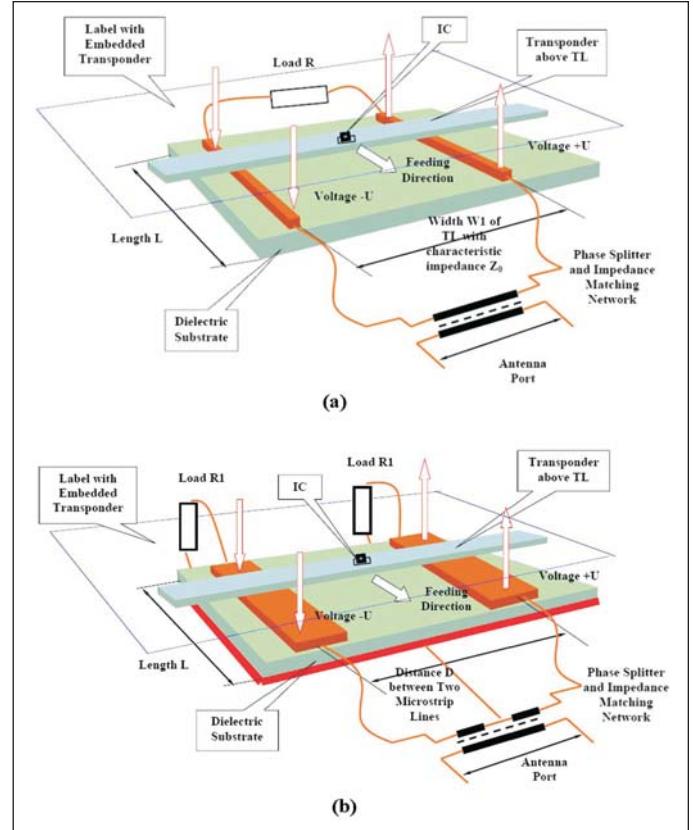


Figure 7 . Antennas based on Terminated Non-Resonant TL. (a) "Two-Wire" transmission line; (b) "Dual Microstrip" transmission line.

mounting elements) from the platen roller back to the media roll. The antennas are very convenient for implementing a transponder interrogation method known as "encoding on the run" along the media feed direction. The distance between the "wires" on the dielectric substrate is 20-40 mm (Fig. 7(a)). The combined structure, "Dual Microstrip" transmission line, is 45-60 mm in length with two microstrips 20-40 mm apart (Fig. 7(b)).

Transponder Placement Boundaries

Both antennas have an excellent selectivity outside of the *targeted transponder zone* (Fig. 5) to prevent communications with adjacent transponders; however, the zone itself is much wider than a transponder width. Antennas must be field upgradeable for different transponder form-factors and redesigned to adjust the *transponder placement range* (Fig. 1(b)). With these antennas a long pitch is required to encode short Smart Labels.

Encoding Field Intensity

Depending on permittivity of the dielectric substrate, antennas can have a width of traces approximately 1.5-3 mm either for the "Two-Wire" TL or for the "Dual-

Microstrip" TL to attain characteristic impedance of 100 ohms. Because of the antenna-transponder orthogonal orientation, the antennas form a small mutual static capacitance and have a loose coupling with transponders. The areas of the electric field strength for the "Two-Wire" TL are not quite close to transponder's most sensitive edges. Both antennas have comparatively low power efficiency but could have a high RF power margin. The areas of intensive electric field of the "Dual-Microstrip" structure are positioned closer to the sensitive transponder edges but the mutual overlapping area is small and the coupling grade is still low. The electric field strength is homogeneous along both transmission lines and amplified by transformer usage. Magnetic field surrounding every TL is practically not contributing to transponders activation power.

Impedance Bandwidth

Both transmission lines are terminated by loads matching their characteristic impedances. They have SWR ~ 1 over a frequency band that is much wider than 1 GHz. The "Two-Wire" TL width W1 defines its characteristic impedance that is about 300 ohms. To satisfy the condition (7) TL is loaded by a 300 ohm resistor. An RF transformer with impedance ratio equal to 6 is used to provide the 50 ohm antenna port impedance match and anti-phase voltages. The combined structure—"Dual Microstrip" transmission line (Fig. 7(b)), loaded by two 100-ohm resistors R1, makes the characteristic impedance of the antenna independent of the distance D. It also uses an RF transformer with the impedance ratio of 2 for impedance matching and phase shifting.

Antennas Based on Terminated Uniform Resonant TL

The second type of antennas is based on terminated but mismatched TL. The so-called Terminated Uniform Resonant TL antennas are demonstrated by the $\lambda/4$ (Fig. 8(a)) and the $\lambda/2$ (Fig. 8(b)) length of the uniform microstrip TL. This group of antennas realizes TL phenomena (10) and (12) respectively. Antenna port impedance is matched to the system impedance without additional matching network.

Antenna Structural Feasibility

Both antennas are in parallel alignment with the targeted transponder and occupy a 20-30 mm interval behind the printer's platen roller.

Transponder Placement Boundaries

These antennas allow a printer to achieve a short transponder placement starting distance 10-15 mm and placement range 20-25 mm for transponders with dimensions 8×95 mm or 10×95 mm [11, 13]. The pitch for the labels is in the range of 40-50 mm.

Encoding Field Intensity

The microstrip TL base element for these antennas has a lower characteristic impedance Z_C than the load impedance Z_L and therefore a wider than non-resonant TL conductive strip, which increases static capacitance and a coupling with a transponder. The impedance mismatch causes a wave reflection with standing wave ratio $SWR > 1$ along the line and increases the electric field strength above the line. The reflection coefficient Γ is a complex voltage (current) ratio, which may be expressed in terms of the antenna characteristic impedance and load impedance (Z_C and Z_L) correspondingly:

$$\Gamma = \frac{Z_L - Z_C}{Z_L + Z_C} \quad (13)$$

Substituting (13) in (3) we obtain

$$SWR = \frac{Z_L}{Z_C} \quad (14)$$

The equation (14) shows that an increase in ratio between the load impedance Z_L and the microstrip impedance Z_C causes an amplification of SWR and makes stronger electric field above the TL. The impedance Z_C is inversely proportional to the conductive strip width W2 or W3 (Fig. 8(a) and (b)). For both antennas the conductive strip widths can be made comparable to the transponder width and RF power margin can attain 3-6 dB level without a significant expansion of the encoding range.

The quarter-wave TL antenna contributes to transponder power delivery by electric field at one side of the TL and by magnetic field at the transponder's center. The half-wave TL antenna is twice as long, has double the mutual static capacitance with a transponder, and therefore maintains an enriched coupling and encoding field intensity.

Impedance Bandwidth

The geometries of $\lambda/4$ and $\lambda/2$ TL antennas, terminated by mismatched loads, define their resonant frequency and consequently their bandwidth. The bandwidth Δf of the quarter-wave TL antenna can be obtained from [27],

$$\Delta f = f_0 \left\{ 2 - \frac{4}{\pi} \arccos \left[\frac{\Gamma_m}{\sqrt{1 - \Gamma_m^2}} * \frac{2\sqrt{Z_0 Z_L}}{|Z_L - Z_0|} \right] \right\} \quad (15)$$

Applying equations for microstrip characteristic impedance and strip width from [28], the bandwidth of the quarter-wave TL antenna is calculated using equation (15) for the frequency 915 MHz as a function of the strip width for impedance Z_L in the range of 2 to 8 ohms (Fig. 8(c)). The plot shows that the strip width W2 can be increased up to 35 mm without violating the justified antenna bandwidth of 150 MHz.

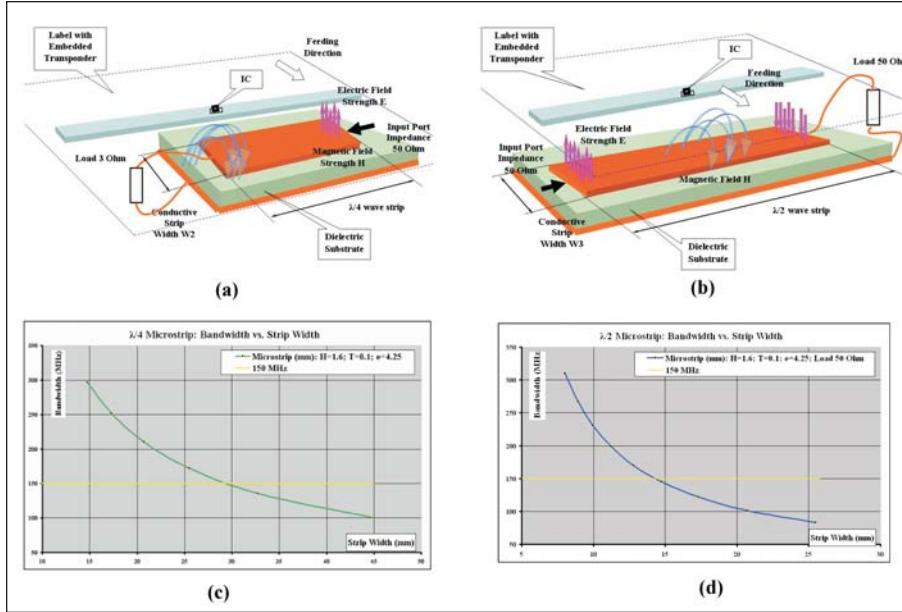


Figure 8 . Antennas based on Terminated Uniform Resonant microstrip TL for 915 MHz band. (a) $\lambda/4$ TL antenna; (b) $\lambda/2$ TL antenna; (c) $\lambda/4$ TL bandwidth vs. width; (d) $\lambda/2$ TL antenna bandwidth vs. width.

Substituting the antenna length $l = \lambda/2$ in (6) for port impedance Z_{IN} , for the half-wave TL antenna the reflection coefficient Γ is:

$$\Gamma = \sqrt{\frac{(Z_0^4 - Z_L^4)^2 \tan^4 \theta + 4(Z_0 Z_L)^2 (Z_0^2 - Z_L^2)^2 \tan^2 \theta}{4(Z_0 Z_L)^2 + (Z_0^2 + Z_L^2)^2 \tan^2 \theta}} \quad (16)$$

where

$$\theta = \beta l; \theta = \pi \frac{f}{f_0}$$

For the maximum reflection coefficient $\Gamma_m = 0.333$ in (16) that corresponds to $SWR = 2$, θ_m and the bandwidth Δf can be obtained,

$$\Delta f = 2f_0 \left(1 - \frac{\theta_m}{\pi} \right) \quad (17)$$

where

$$\theta_m = \pi \frac{f_m}{f_0}$$

and f_m corresponds to Γ_m .

Using equations for microstrip characteristic impedance and strip width from [28], the bandwidth Δf from (17) of $\lambda/2$ wavelength TL antenna is plotted versus strip width $W3$ (Fig. 8(d)) for $Z_L = 50$ ohm and the frequency 915 MHz. In order to comply with the requirement of $\Delta f = 150$ MHz, the strip width $W3$ of the half-wavelength TL antenna should not exceed 14 mm. This bandwidth restriction limits the *transponder placement range* in the case when printer design requires a wide transponder encoding area.

Antennas Based on Terminated Tapered Resonant TL

Another sub-group of the second type of antennas is the so-called Terminated Tapered Resonant TL antennas. The design goal is to achieve for microstrip TL antennas a relatively wide bandwidth and an increased grade of coupling with transponders. This goal is accomplished by implementing a method previously developed for bandwidth enhancement of impedance matching TL transformers. This method is based on the theory of small reflections [24] applied to a tapered (non-linear) profile of characteristic impedance for any TL. Antennas are presented by the $\lambda/4$ wave and the $\lambda/2$ wave non-uniform microstrip TL.

Antenna Structural Feasibility

The width of the quarter-wave non-uniform microstrip TL is tapered from W_4 to W_5 (Fig. 9(a)). The edge widths of the half-wave non-uniform microstrip TL antenna are W_6 (Fig. 9(b)). Both antennas can be made wider than the widths of uniform microstrip TL antennas. The corresponding lengths of non-uniform microstrip TL antennas are shorter than lengths of uniform ones because of the extension of the sides of the tapered microstrip TL. The considered example is the half-wave microstrip linear width (non-linear characteristic impedance) taper TL (Fig. 9(b)). The width of the TL varies linearly from 18 to 4.5 and back to 18 mm, the dielectric constant of the substrate is 4.25, and the height of the substrate and the length of the strip are 1.6 mm and 65 mm respectively.

Transponder Placement Boundaries

Terminated Tapered Resonant TL antennas can provide the same placement starting distance and placement range compared to the Terminated Uniform Resonant TL antennas with equally wide conductive strip. For an extended transponder placement range the tapered conductive strip can be made wider without sacrificing the antenna bandwidth.

Encoding Field Intensity

Field distribution above the quarter-wave terminated tapered TL antenna (Fig. 9(a)) covers only a part of the targeted transponder thus delivering half the power of the half-wave TL antenna. Electric and magnetic field distribution of the half-wave terminated tapered TL antenna (Fig. 9(b)) is concentrated at the most field sensitive transponder areas. The antenna with linearly variable width at the input end $W_6 = 18$ mm maintains a greater mutual static capacitance with the transponder and provides a higher spatial selectivity than the uniform TL antenna with the narrower conductive strip. The RF power margin can achieve 6 dB without a significant increase in the transponder encoding range.

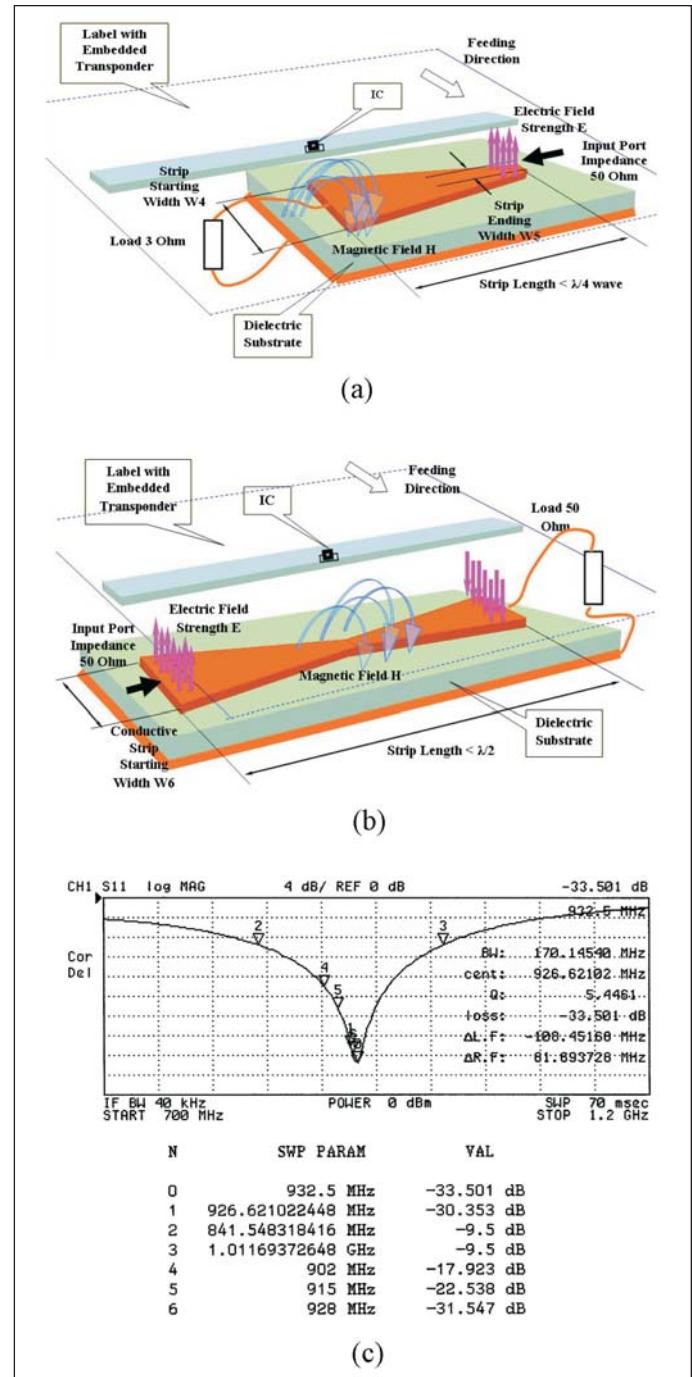


Figure 9 . Antennas based on Terminated Tapered Resonant microstrip TL: (a) $\lambda/4$ TL antenna; (b) $\lambda/2$ TL antenna; (c) S_{11} parameter for $\lambda/2$ TL antenna dimensions $4.5 \times 18 \times 65$ mm.

Impedance Bandwidth

Like other terminated resonant TL antennas, the tapered TL antennas have their port impedance of 50 ohm without an additional matching network. In contrast to the uniform TL, the $\lambda/2$ wavelength linearly tapered

width microstrip TL antenna has a widened bandwidth. Measured reflection loss (S_{11}) of an antenna with a conductive strip at the input end width $W_6 = 18$ mm (Fig. 9 (c)) shows that its bandwidth exceeds 150 MHz. The taper implementation for the $\lambda/4$ wave microstrip TL is not necessary for the bandwidth enhancement unless dictated by other design reasons. The uniform $\lambda/4$ wave microstrip TL with a strip width W_4 of up to 30 mm already has BW in the range of 150 MHz (Fig. 8(c)). The importance of tapered $\lambda/4$ wave TL sections was shown by Young [29, 30] for a bandpass filter design. He demonstrated that every second impedance step quarter-wave transformer replaced with an opposite impedance step provides the equal input and output impedances. It implies that the two parts of $\lambda/4$ wave tapered TL can be used as building blocks for tapered $\lambda/2$ wave TL antennas.

It was shown by Collin [24] that reflection coefficient of tapered TL is:

$$\Gamma_{IN}(f) = \frac{1}{2} \int_0^L e^{-2j\beta z} \frac{d}{dz} \ln(\bar{Z}) dz \quad (18)$$

where z is the position along the taper, L is the taper length, Z is the taper variation, Z_0 represents the reference impedance at the input end of the taper.

There are numerous solutions for (18) available for several characteristic impedance profiles (not strip width profiles) including exponential, linear, triangular [27], Klopfenstein [31], and Hecken [32] in order to increase the bandwidth. For example, for the exponential taper the input reflection coefficient can be obtained [27]:

$$\Gamma_{IN} = \frac{1}{2} \ln \frac{Z_L}{Z_0} e^{-j\beta L} \frac{\sin \beta L}{\beta L} \quad (19)$$

This simplified solution (19) assumes TEM propagation mode for TL and both its characteristic impedance and propagation coefficient are distance-independent. Practically these parameters are changes along a line and propagation wave is not quite TEM. The actual two-section combined TL length then is shorter than $\lambda/2$ wavelength. For a maximum allowed reflection coefficient in the pass band the taper profile introduced by Klopfenstein has the shortest total length.

The reflection coefficient along a non-uniform TL can be described by a non-linear Riccati-type differential equation [33], which does not have a general analytical solution. The analysis can be based on numerical methods [34] or performed using electromagnetic analysis software, such as HFSS from Ansoft Corporation [35].

[This final part of this article series will appear in the next issue of High Frequency Electronics. All references will be listed at the end of Part 3.]

Author Information

Boris Y. Tsirline is the Principal Engineer at Zebra Technologies Corporation in Vernon Hills, IL. He received a BS and MS degrees in RF & Microwave Engineering from Moscow Aviation University, Russia in 1973 and a PhD in EE from Moscow State University in 1986. He has been in the Automatic Identification and Data Capture industry since 1995; first as an RF Engineer involved in LF RFID design at TRW, then at Zebra Technologies Corporation, where he has been since 1998. He can be reached by e-mail at BTsirline@zebra.com.

射 频 和 天 线 设 计 培 训 课 程 推 荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立，致力并专注于微波、射频、天线设计研发人才的培养；我们于 2006 年整合合并微波 EDA 网(www.mweda.com)，现已发展成为国内最大的微波射频和天线设计人才培养基地，成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程，广受客户好评；并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书，帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司，以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训课程列表：<http://www.edatop.com/peixun/rfe/129.html>




射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材；旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习，能够让学员完全达到和胜任一个合格的射频工程师的要求…

课程网址：<http://www.edatop.com/peixun/rfe/110.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程，共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解，并多结合设计实例，由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS，迅速提升个人技术能力，把 ADS 真正应用到实际研发工作中去，成为 ADS 设计专家…

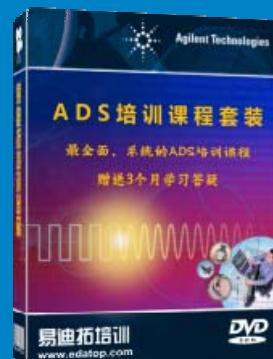

课程网址：<http://www.edatop.com/peixun/ads/13.html>



HFSS 学习培训课程套装

该套课程套装包含了本站全部 HFSS 培训课程，是迄今国内最全面、最专业的 HFSS 培训教程套装，可以帮助您从零开始，全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装，更可超值赠送 3 个月免费学习答疑，随时解答您学习过程中遇到的棘手问题，让您的 HFSS 学习更加轻松顺畅…

课程网址：<http://www.edatop.com/peixun/hfss/11.html>

CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出, 是最全面、系统、专业的 CST 微波工作室培训课程套装, 所有课程都由经验丰富的专家授课, 视频教学, 可以帮助您从零开始, 全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装, 还可超值赠送 3 个月免费学习答疑…



课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 天线设计培训课程套装

套装包含 6 门视频课程和 1 本图书, 课程从基础讲起, 内容由浅入深, 理论介绍和实际操作讲解相结合, 全面系统的讲解了 HFSS 天线设计的全过程。是国内最全面、最专业的 HFSS 天线设计课程, 可以帮助您快速学习掌握如何使用 HFSS 设计天线, 让天线设计不再难…

课程网址: <http://www.edatop.com/peixun/hfss/122.html>

13.56MHz NFC/RFID 线圈天线设计培训课程套装

套装包含 4 门视频培训课程, 培训将 13.56MHz 线圈天线设计原理和仿真设计实践相结合, 全面系统地讲解了 13.56MHz 线圈天线的工作原理、设计方法、设计考量以及使用 HFSS 和 CST 仿真分析线圈天线的具体操作, 同时还介绍了 13.56MHz 线圈天线匹配电路的设计和调试。通过该套课程的学习, 可以帮助您快速学习掌握 13.56MHz 线圈天线及其匹配电路的原理、设计和调试…



详情浏览: <http://www.edatop.com/peixun/antenna/116.html>

我们的课程优势:

- ※ 成立于 2004 年, 10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养, 更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授, 结合实际工程案例, 直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>