



AUSTRON INTELLIGENT TECHNOLOGY CO., LTD

Product Specification

Model:	AST8670
REV:	V1.0
DRAWN BY:	
CHECKED BY:	
APPD.BY:	



1. Introduction

AUSTRON INTELLIGENT TECHNOLOGY CO.,LTD the pioneer of the Bluetooth 4.0 modules AST8670 which is a high performance, cost effective, low power and compact solution. The Bluetooth module provides a complete 2.4GHz Bluetooth system BlueCore® CSR8670™ BGA consumer audio platform for wired and wireless applications integrates an ultralow-power DSP and application processor with embedded flash memory, a high-performance stereo codec, a power management subsystem, LED and LCD drivers and capacitive touch sensor inputs in a SoC IC. The enhanced Kalimba DSP coprocessor with 80MIPS supports enhanced audio and DSP applications.

2. Key Features

- Fully Qualified Single-chip Bluetooth® v4.0 System
 - Receiver sensitivity: -90dBm (basic rate) and -92dBm(EDR)
 - 10dBm RF transmit power with level control from on-chip 6-bit DAC
 - Support for CSR's latest CVC technology for narrow-band and wideband voice connections including wind noise reduction
 - Stereo codec with 2 channels of ADC and up to 6 microphone inputs (includes bias generators and digital microphone support)
 - Multipoint HFP connection to 2 phones for voice
 - Multipoint A2DP connection enables a headset(A2DP) connection to 2 A2DP source devices for music playback
 - Audio interfaces: I²S PCM and SPDIF
 - aptX, SBC, MP3 and AAC decoder support
 - Serial interfaces: UART, USB 2.0 full-speed, I²C
- Supported sample rates of 8, 11.025, 16, 22.05, 32,44.1, 48 and 96kHz (DAC only)


■Bluetooth low energy

- Dual-mode Bluetooth low energy radio
 - Support for Bluetooth basic rate / EDR and low energy connections
 - 3 Bluetooth low energy connections at the same time as basic rate A2DP
- Slim module with 19mm x 12mm x 2.0mm
 - RoHS Compliant

3. Applications

- Smart remote controllers
- Wired or wireless soundbars
- Wired or wireless speakers and headphones
- Wearable audio (on-the-go)
- Wearable audio with sensors (health and wellbeing applications)

4. Block Diagram

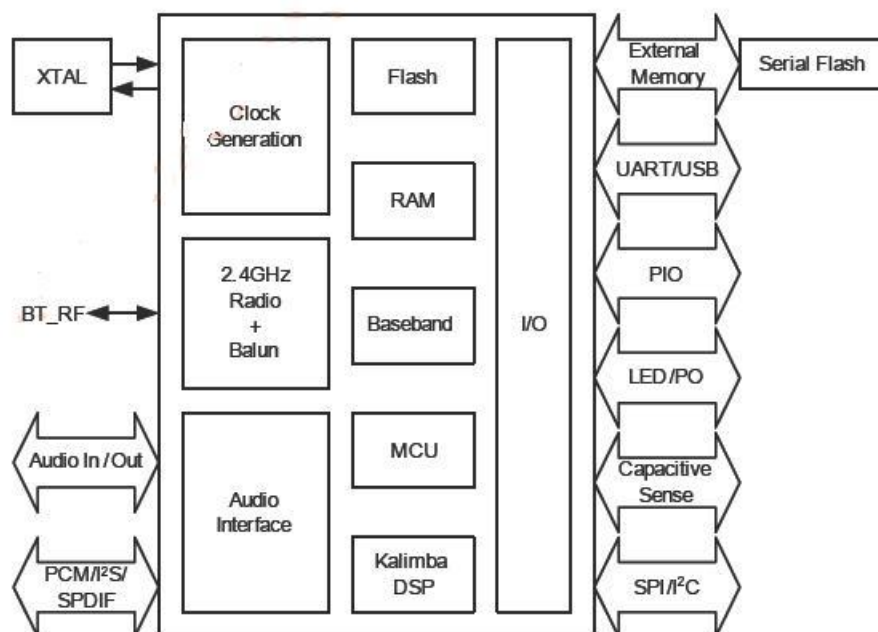


5. General specifications

Model Name	AST8670		
Bluetooth Standard	Bluetooth v4.0 Standard		
Dimension	19mm x 12mm x 2.0mm		
Electrical Characteristics RF			
Frequency Range	2402~2480MHz		
Maximum RF Transmit Power	10dBm		
Receive Sensitivity	-90dBm		
Electrical Characteristics(Absolute Maximum Ratings)			
Pin Name	Min	Max	Unit
VBAT	-0.4	4.4	V
CHARGE	-0.4	5.7	V
LED(0:1)	-0.4	4.4	V
PIO	-0.3	3.6	V
Recommended Operating Conditions			
VBAT	/	4.2	V
CHARGE	/	5	V
LED(0:1:2)	/	10	mA
PIO	/	1.8-3.3	V
Operating Temperature Range	-10	70	°C
Storage Temperature	-40	85	°C

6. Module Package Information

6.1 Pinout Diagram and package dimensions

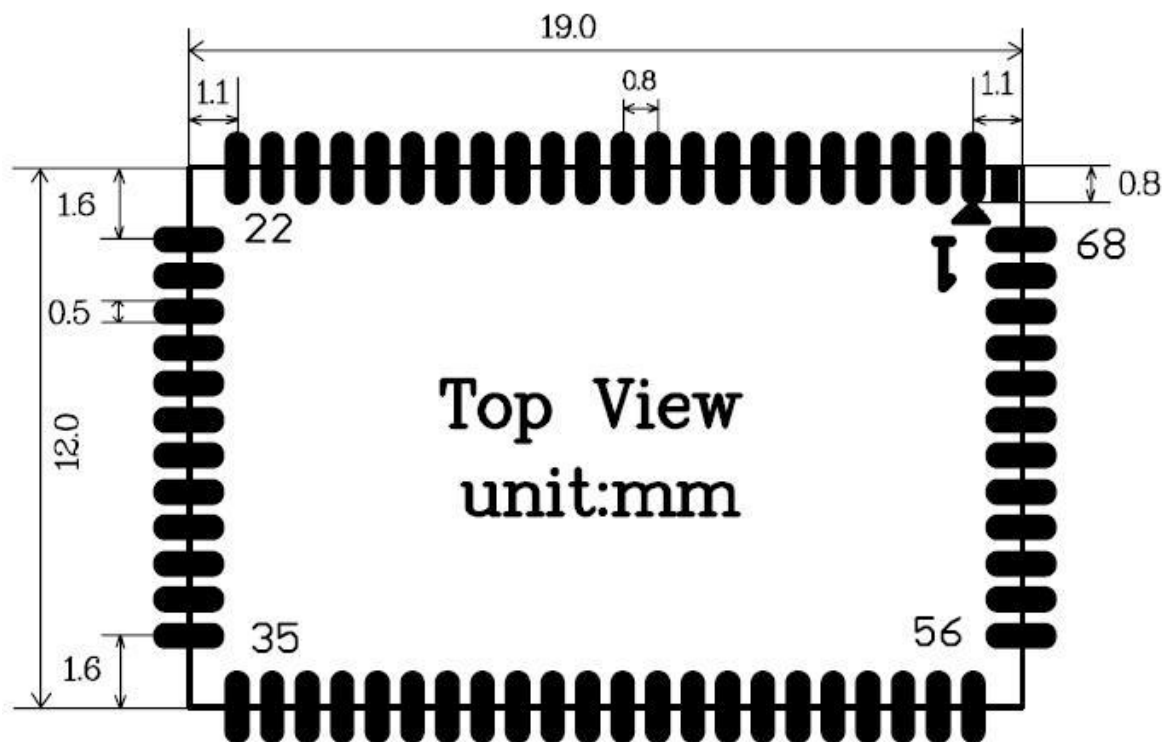


6.2 Module Pin descriptions

PIN NO.	Pin Name	Description
1	CAP_SENSE[5]	Capacitive touch sensor input
2	CAP_SENSE[3]	Capacitive touch sensor input
3	CAP_SENSE[4]	Capacitive touch sensor input
66	CAP_SENSE[0]	Capacitive touch sensor input
67	CAP_SENSE[1]	Capacitive touch sensor input
68	CAP_SENSE[2]	Capacitive touch sensor input
65	AIO[0]	Analogue programmable input / output line
4	AIO[1]	Analogue programmable input / output line
5	SPI_CLK	SPI clock
6	SPI_MOSI	SPI data input
7	SPI_MISO	SPI data output
8	SPI_CS	Chip select for SPI, active low

9	PCM1_IN	synchronous data input [PIO17]
10	PCM1_CLK	synchronous data clock [PIO20]
11	PCM1_SYNC	synchronous data sync [PIO19]
12	PCM1_OUT	synchronous data output [PIO18]
13	RESET	Reset if low. Input debounced so must be low for >5ms to cause a reset
14	UART_RTS	UART request to send, active low [PIO16]
15	UART_CTS	UART clear to send, active low
16	UART_RX	UART data input
17	UART_TX	UART data output
18	LED0	LED driver [PO29]
19	LED1	LED driver [PO30]
20	LED2	LED driver [PO31]
21	PIO/0	Programmable input / output line 0
22	GND	Ground
23	PIO/1	Programmable input / output line 1
24	PIO/2	Programmable input / output line 2
25	PIO/15	Programmable input / output line 15
26	PIO/3	Programmable input / output line 3
27	PIO/4	Programmable input / output line 4
28	PIO/5	Programmable input / output line 5
29	PIO/6	Programmable input / output line 6
30	PIO/7	Programmable input / output line 7
31	PIO/8 [Wake]	Programmable input / output line 8
32	PIO/9 [Wake]	Programmable input / output line 9
33	PIO/10	Programmable input / output line 10
34	PIO/14	Programmable input / output line 14
35	PIO/13	Programmable input / output line 13
36	PIO/12	Programmable input / output line 12
37	PIO/11	Programmable input / output line 11
38	USB_N	USB data minus
39	USB_P	USB data plus with selectable internal 1.5kΩ pull-up resistor
40	QSPI_FLASH_IO[2]	Serial quad I/O flash data bit 2. Alternative function PIO[27].
41	QSPI_FLASH_CS	SPI flash chip select. Alternative function PIO[23]
42	QSPI_FLASH_IO[0]	Serial quad I/O flash data bit 0. Alternative function PIO[25].

43	GND	Ground
44	VBAT	Battery Power supply input for 3.0~4.2V
45	POWER/VREGENABLE	Power on/off input key indication
46	CHARGE	Internal charger input for charging(5V)
47	QSPI_FLASH_IO[1]	Serial quad I/O flash data bit 1. Alternative function PIO[26].
48	QSPI_FLASH_IO[3]	Serial quad I/O flash data bit 3. Alternative function PIO[28].
49	QSPI_SRAM_CS#	SPI RAM chip select. Alternative function PIO[24].
50	QSPI_FLASH_CLK	SPI flash clock. Alternative function PIO[21].
51	QSPI_SRAM_CLK	SPI RAM clock. Alternative function PIO[22].
52	1V8	Internal 1.8V
53	MIC_AN	Microphone input negative, channel A
54	MIC_AP	Microphone input positive, channel A
55	MIC_BIAS	Microphone bias output
56	MIC_BN	Microphone input negative, channel B
57	MIC_BP	Microphone input positive, channel B
58	SPK_RN	Speaker output negative, right
59	SPK_RP	Speaker output positive, right
60	SPK_LN	Speaker output negative, left
61	SPK_LP	Speaker output positive, left
62	GND	Ground
63	BT_RF	Bluetooth 50Ω transmitter output /receiver input
64	GND	Ground

7. Example Application Schematic

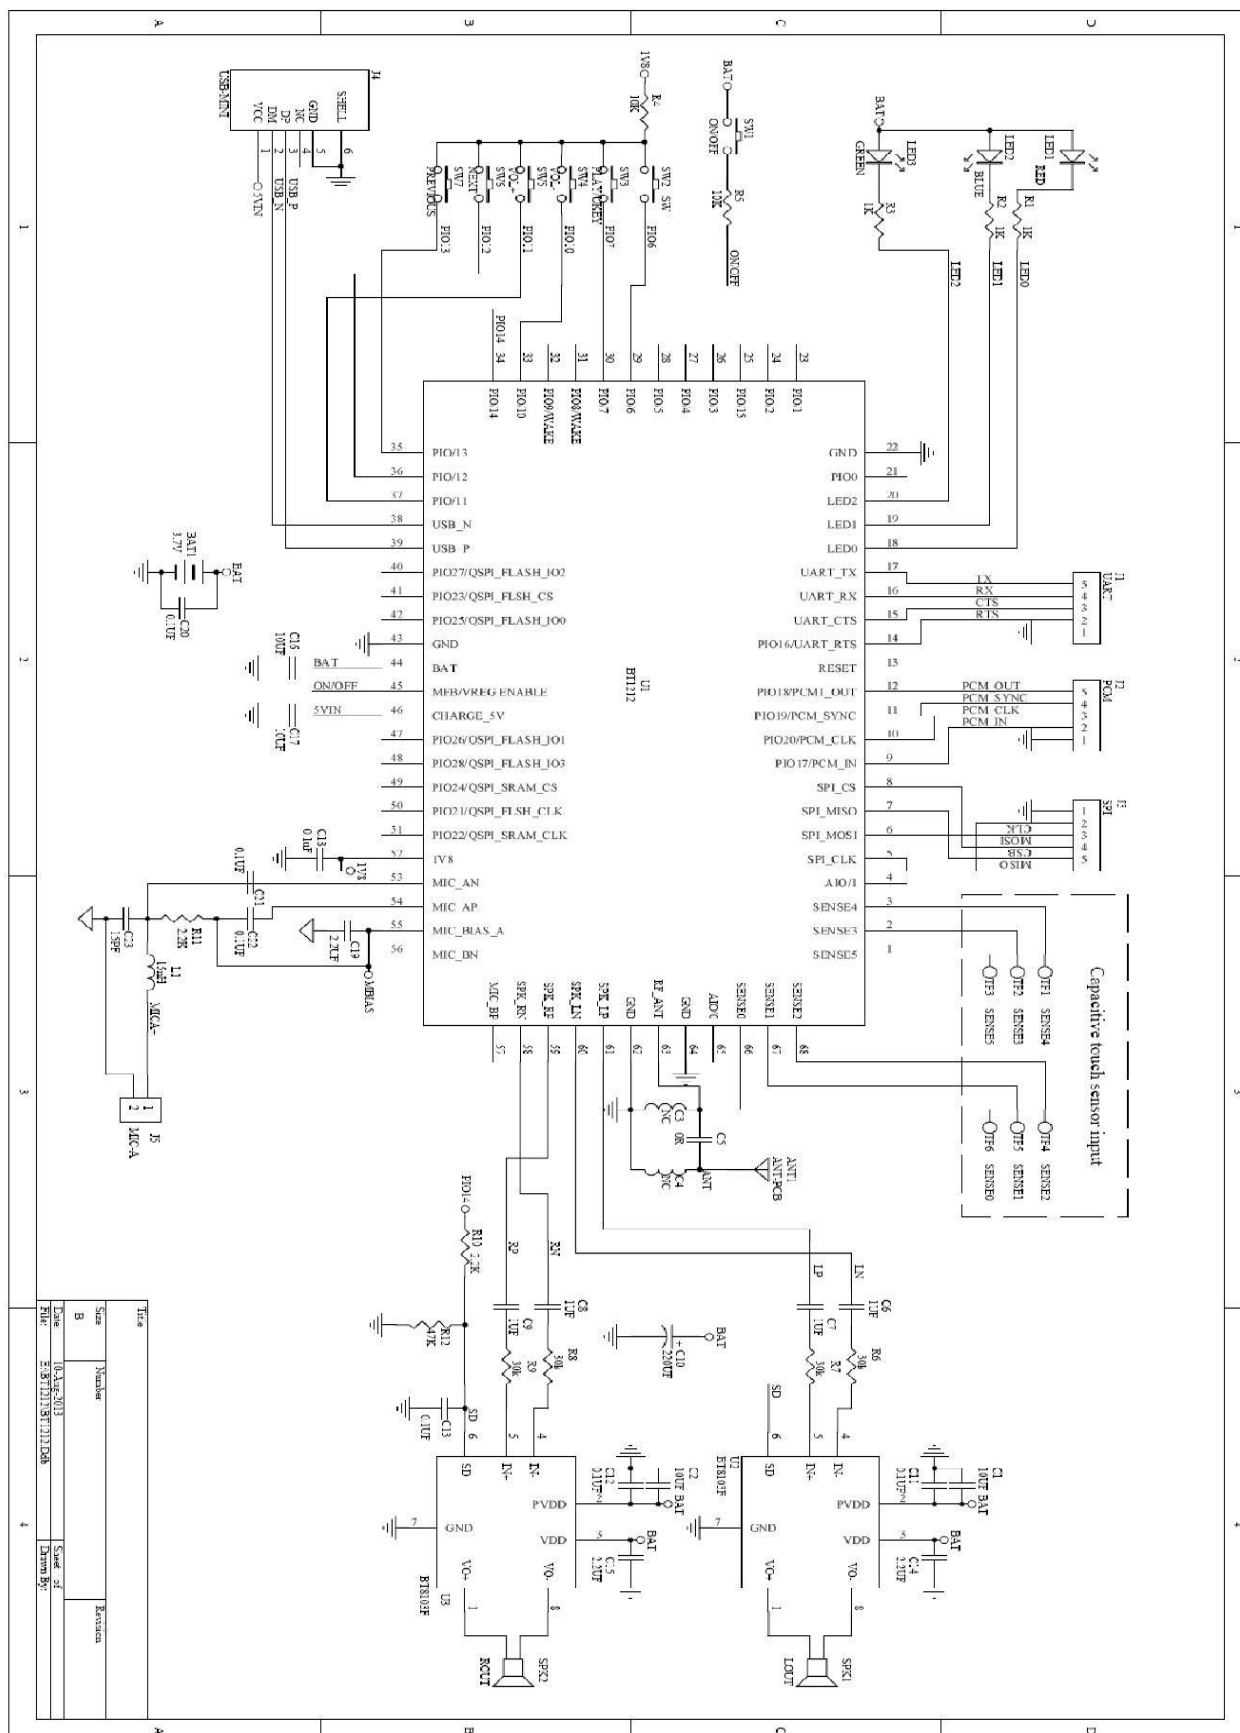

射频和天线设计培训课程推荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立,致力并专注于微波、射频、天线设计研发人才的培养;我们于 2006 年整合合并微波 EDA 网(www.mweda.com),现已发展成为国内最大的微波射频和天线设计人才培养基地,成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程,广受客户好评;并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书,帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司,以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训推荐课程列表: <http://www.edatop.com/peixun/tuijian/>



射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材;旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习,能够让学员完全达到和胜任一个合格的射频工程师的要求...

课程网址: <http://www.edatop.com/peixun/rfe/110.html>

手机天线设计培训视频课程

该套课程全面讲授了当前手机天线相关设计技术,内容涵盖了早期的外置螺旋手机天线设计,最常用的几种手机内置天线类型——如 monopole 天线、PIFA 天线、Loop 天线和 FICA 天线的设计,以及当前高端智能手机中较常用的金属边框和全金属外壳手机天线的设计;通过该套课程的学习,可以帮助您快速、全面、系统地学习、了解和掌握各种类型的手机天线设计,以及天线及其匹配电路的设计和调试...

课程网址: <http://www.edatop.com/peixun/antenna/133.html>



WiFi 和蓝牙天线设计培训课程



该套课程是李明洋老师应邀给惠普 (HP)公司工程师讲授的 3 天员工内训课程录像,课程内容是李明洋老师十多年工作经验积累和总结,主要讲解了 WiFi 天线设计、HFSS 天线设计软件的使用,匹配电路设计调试、矢量网络分析仪的使用操作、WiFi 射频电路和 PCB Layout 知识,以及 EMC 问题的分析解决思路等内容。对于正在从事射频设计和天线设计领域工作的您,绝对值得拥有和学习!...

课程网址: <http://www.edatop.com/peixun/antenna/134.html>

CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出,是最全面、系统、专业的 CST 微波工作室培训课程套装,所有课程都由经验丰富的专家授课,视频教学,可以帮助您从零开始,全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装,还可超值赠送 3 个月免费学习答疑...

课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 学习培训课程套装

该套课程套装包含了本站全部 HFSS 培训课程,是迄今国内最全面、最专业的 HFSS 培训教程套装,可以帮助您从零开始,全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装,更可超值赠送 3 个月免费学习答疑,随时解答您学习过程中遇到的棘手问题,让您的 HFSS 学习更加轻松顺畅...

课程网址: <http://www.edatop.com/peixun/hfss/11.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程,共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解,并多结合设计实例,由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS,迅速提升个人技术能力,把 ADS 真正应用到实际研发工作中去,成为 ADS 设计专家...

课程网址: <http://www.edatop.com/peixun/ads/13.html>



我们的课程优势:

- ※ 成立于 2004 年,10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养,更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授,结合实际工程案例,直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>