



a module solution provider

WG1300-B0 WLAN Module

TI CC3000 IEEE 802.11b/g solution

Datasheet


Draft 0.3

FEATURES

- IEEE 802.11 b/g compliant.
- Compact footprint: 14.5mmx14.5mmx2mm
- Operating Voltage: 2.9~4.8V
- Operating temperature: -40~85°C
- Embedded Wi-Fi and networking software
 - Including drivers, stack, and supplicant
 - Universal IP connectivity enabled anywhere
 - Pair easily with low-memory, low-cost, Low-power microcontroller systems
 - Implement Wi-Fi quickly without previous Wi-Fi or RF experience
- Credible, proven solution with best-in-class Budget
 - Long range, reliable coverage throughout the entire house
 - Proven Wi-Fi interoperability
- Complete platform solution and certified modules
 - Get started quickly with sample applications on multiple platforms
 - Comprehensive documentation and support community
 - Porting documentation available to allow MCU flexibility

DESCRIPTION

WG1300-B0 is a 2.4GHz WLAN module which can be integrated with any low-cost/low power MCU to makes it the ideal solution for embedded applications.

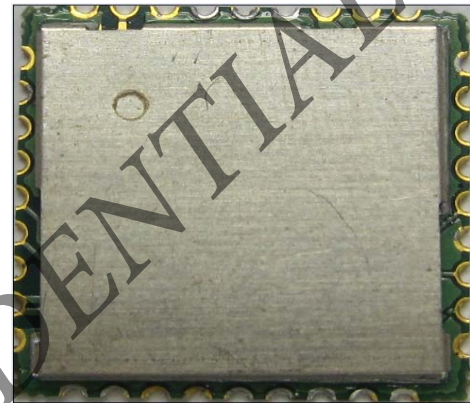

With the necessary PHY, MAC and network layers, it makes WG1300-B0 can support WLAN application via SPI bus to communicate with host microcontrollers or other embedded processors.

With worldwide certificate (CID: WFA19445) on WiFi 802.11 WPA2, WPA, and WEP system

Interoperability test, customers can leverage modular certificate by adopting the same antenna and RF trace routing to save development cost and speed up time to market by following its reference design.

APPLICATIONS

- Home entertainment control
- Thermostats, appliances
- HVAC controller, remote displays
- Home Network aggregators
- Remote appliance diagnostics/support
- Remote storage devices
- Cameras and video surveillance
- Toys
- Gaming

Index

1. FUNCTIONAL FEATURES	4
1.1. MODULE BLOCK DIAGRAM.....	4
1.2. FUNCTIONAL BLOCK FEATURE.....	4
1.2.1. WLAN Features	4
1.2.2. Network Stack Supported Protocols	5
1.2.3. Wireless Security System Features.....	5
2. MODULE SPECIFICATION	6
2.1. ABSOLUTE MAXIMUM RATINGS	6
2.2. RECOMMENDED OPERATING CONDITIONS	6
2.3. GENERAL CHARACTERISTICS	7
3. MODULE OUTLINE.....	8
3.1. FOOTPRINT AND PINOUTS	8
3.2. PIN DESCRIPTION	8
4. SPI HOST CONTROLLER INTERFACE	11
4.1. OVERVIEW	11
4.2. SPI INTERFACE DESCRIPTION	11
4.3. SPI LINE DESCRIPTION	12
4.4. SPI TIMING	12
5. POWER-UP SEQUENCE	14
6. DEBUG INTERFACE	15
6.1. UART DEBUG LINES	15
6.2. RS232 DEBUG LINES.....	15
7. SMT AND BAKING RCOMMENDATIONS	16
7.1. BAKING CONDITION.....	16
7.2. SMT RECOMMENDATION	16
7.3. STENCIL THICKNESS	17
7.4. SOLDERING PASTE (WITHOUT Pb)	17
8. PACKAGE INFORMATION.....	18

8.1. MODULE MECHANICAL OUTLINE.....	18
8.2. PACKAGE MARKING.....	19
8.3. ORDERING INFORMATION	19
9. REFERENCE SCHEMATICS.....	20
10. LAYOUT RECOMMENDATION	21
CONTACT JORJIN TECHNOLOGY	23
11. HISTORY CHANGES	24

JORJIN CONFIDENTIAL

1. FUNCTIONAL FEATURES

1.1. Module Block Diagram

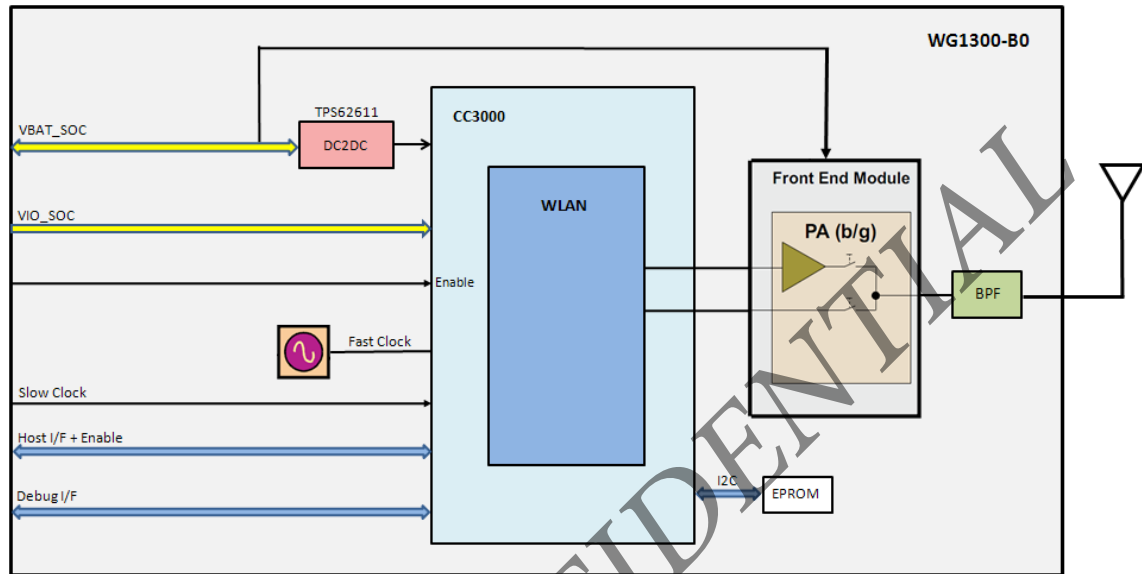


Figure 1 Module Block Diagram

1.2. Functional Block Feature

1.2.1. WLAN Features

WLAN MAC Baseband Processor and RF transceiver which is IEEE802.11b/g compliant

- Accepts 26MHz reference clock Input
- IEEE Std 802.11d,i PICS compliant
- Supports Serial Peripheral Interface (SPI) Host Interface
- Medium-Access Controller (MAC)
 - Embedded ARM™ Central Processing Unit (CPU)
 - Hardware-Based Encryption/Decryption Using 64-, 128-Bit WEP, TKIP or AES Keys
 - Supports requirements for Wireless Fidelity (Wi-Fi) Protected Access (WPA and WPA2.0) and IEEE Std 802.11i [Includes Hardware-Accelerated Advanced-Encryption Standard (AES)]

- Baseband Processor
- 2.4GHz Radio
 - Digital Radio Processor (DRP) implementation
 - Internal LNA
 - Supports : IEEE Std 802.11b, 802.11g, 802.11b/g

1.2.2. Network Stack Supported Protocols

- Transport layer
 - TCP
 - UDP
- Network layer
 - IPv4
 - Ping
 - DHCP
 - DNS Client
- Link layer
 - ARP

1.2.3. Wireless Security System Features

- Supported modes
 - Open (no security)
 - WEP
 - WPA-Personal
 - WPA2-Personal
- Supported encryption types
 - WEP
 - TKIP
 - AES
 - Open

2. MODULE SPECIFICATION

2.1. Absolute Maximum Ratings

Parameters	Min	Max	Unit
Power supply Voltage (VBAT_IN)	-0.5	+5.5 ⁽¹⁾	V
Voltage of digital pins ⁽²⁾	-0.5	+3.6	V
Voltage of EEPROM and RS232 test signals	-0.5	2.1	V
Operating Temperature	-40	+85 ⁽³⁾	°C
Storage Temperature	-55	+125	°C

(1) Maximum allowed depends on accumulated time at that voltage; 4.8V for 7 years lifetime, 5.5V for 6 hours cumulative.

(2) This includes the SPI and Power Enable signals

(3) The device can be reliably operated for 5,000 active-WLAN cumulative hours at TA of 85°C.

Table 1 Absolute Maximum Ratings

2.2. Recommended Operating Conditions

Recommended Operating Conditions

Parameters	Min	TYP	Max	Unit
VBAT_IN	2.9	3.3	4.8	V
Voltage of digital pins	0	3.3	3.6	V
Voltage of EEPROM and RS232 test signals	0		1.8	V
Operating Temperature	-30	25	75	°C

Table 2 Recommended Operating Conditions

2.3. General Characteristics

DC Characteristics (RS232/EEPROM I/O)

Parameters	Test Conditions	Min	Max	Unit
Logic input low, V_{IL}	--	0	0.67	V
Logic input high, V_{IH}	--	1.05	1.92	V
Logic output low, V_{OL}	4.8mA	0	0.45	V
Logic output high, V_{OH}	4.8mA	1.17	1.92	V

Table 3 DC Characteristics General Purpose I/O

3. MODULE OUTLINE

3.1. Footprint and pinouts

For PCB layout, the footprint below is recommended for your applications.

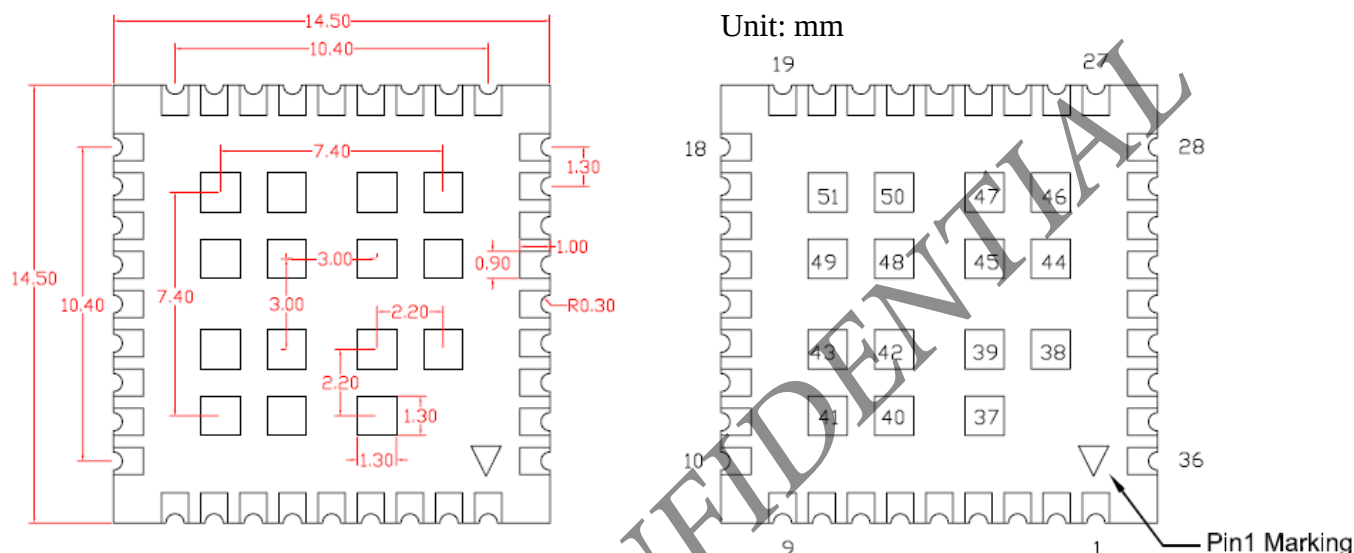


Figure 2 WG1300-B0 Footprint and Pinouts

3.2. Pin Description

Pin #	Signal Name	Type	Description
1	GND	GND	Ground
2	WL_UART_DBG	I	WL_UART_DBG
3	WL_EN2 ⁽¹⁾	O	WL_EN2
4	WL_EN1 ⁽²⁾	O	WL_EN1.
5	WL_RS232_TX ⁽³⁾	I	WL_RS232_TX (Test-mode signal, 1.8V Logic)
6	WL_RS232_RX ⁽³⁾	O	WL_RS232_RX (Test-mode signal, 1.8V Logic)
7	GND	GND	Ground
8	VIO_SOC	Power	Module VIO Supply
9	GND	GND	Ground

10	GND	GND	Ground
11	SPI_DIN	I	HOST Interface SPI Data In
12	SPI_DOUT	I	HOST Interface SPI Data Out
13	SPI_IRQ	O	HOST Interface SPI Interrupt
14	SPI_CLK	O	HOST Interface SPI CLOCK
15	SPI_CS	O	HOST Interface SPI Chip Select
16	GND	GND	Ground
17	EXT_32K	CLK	EXTERNAL SLOW CLOCK FROM HOST
18	GND	GND	Ground
19	GND	GND	Ground
20	XTALP		Fref Input
21	XTALM		Fref Input
22	GND	GND	Ground
23	SCL_EEPROM ⁽⁴⁾	I/O	I2C CLOCK LINE FROM EEPROM.
24	SCL_CC3000 ⁽⁴⁾	I/O	I2C CLOCK LINE FROM CC3000.
25	SDA_EEPROM ⁽⁵⁾	I/O	I2C DATA LINE FROM EEPROM.
26	SDA_CC3000 ⁽⁵⁾	I/O	I2C DATA LINE FROM CC3000.
27	GND	GND	Ground
28	VBAT_IN	Power	Power Supply to Module
29	GND	GND	Ground
30	DC2DC_OUT	I	1.8V Supply
31	GND	GND	Ground
32	CLK_REQ_OUT	I/O	Clock request out
33	NS_UARTD	I/O	Networking subsystem; UART Debug line
34	GND	GND	Ground
35	RF_ANT	RF	WLAN ANT Port
36	GND	GND	Ground
37	GND	GND	Ground
38	GND	GND	Ground

39	GND	GND	Ground
40	GND	GND	Ground
41	GND	GND	Ground
42	GND	GND	Ground
43	GND	GND	Ground
44	GND	GND	Ground
45	GND	GND	Ground
46	GND	GND	Ground
47	GND	GND	Ground
48	GND	GND	Ground
49	GND	GND	Ground
50	GND	GND	Ground
51	GND	GND	Ground

(1) Short to WL_EN1 (Pin #7) for function mode.

(2) Short to GND for test mode; Short to WL_EN2 (Pin #5) for function mode.

(3) Left unconnected for function mode

(4) I2C Clock lines from EEPROM and CC3000 must be connected together for function mode.

(5) I2C Data lines from EEPROM and CC3000 must be connected together for function mode.

Table 4 WG1300-B0 Pin Description

4. SPI HOST CONTROLLER INTERFACE

WG1300-B0 communicates with HOST via SPI Bus. Below shows the descriptions on SPI bus.

4.1. Overview

The SPI interface provides high-speed data transfer capability with low power consumption for mobile electronic devices. The SPI bus was designed to operate on a point-to-multipoint basis by providing a separate, active-low chip select (CS) per device.

4.2. SPI Interface Description

In order to facilitate a broad implementation, the protocol is half duplex and does not require simultaneous operation of data OUT (DO) and data IN (DI). All TI communication devices are slaves in this protocol, and all transactions are initiated by the host, as the SPI Master. The clock rate for each one of the connected devices may be different and configured per device.

Figure 3 shows SPI interface signals

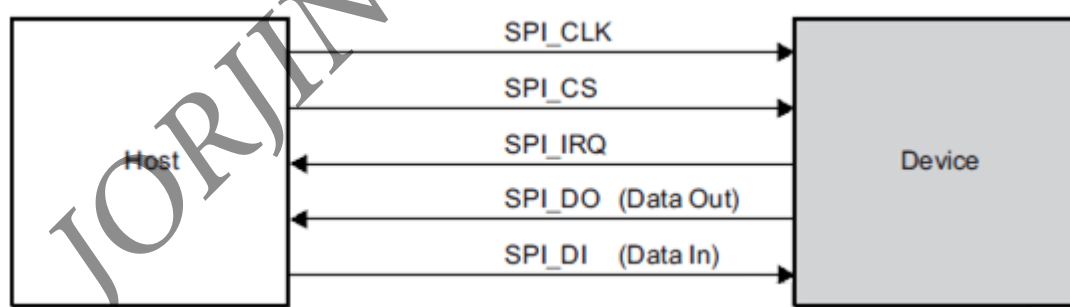


Figure 3 SPI Interface signals

4.3. SPI Line Description

Port Name	I / O	Description
SPI_CLK	I	Clock (0 MHz to 38.4 MHz) from host to slave
SPI_DI	I	Data from host to slave
SPI_CS ⁽¹⁾	I	CS signal from host to slave
SPI_IRQ ⁽²⁾	O	Interrupt from slave to host
SPI_DO	O	Data from slave to host

(1) CS selects a CC3000 device, indicating that a master wants to communicate to the device.

(2) IRQ is a dual-purpose slave to the master direction line: in SPI IDLE state while no data transfer is active, driving IRQ low indicates to the master that the CC3000 device has data to pass to it; driving IRQ low following CS deassertion indicates that the CC3000 device is ready to receive data.

Table 5 SPI Interface Signals Description

4.4. SPI Timing

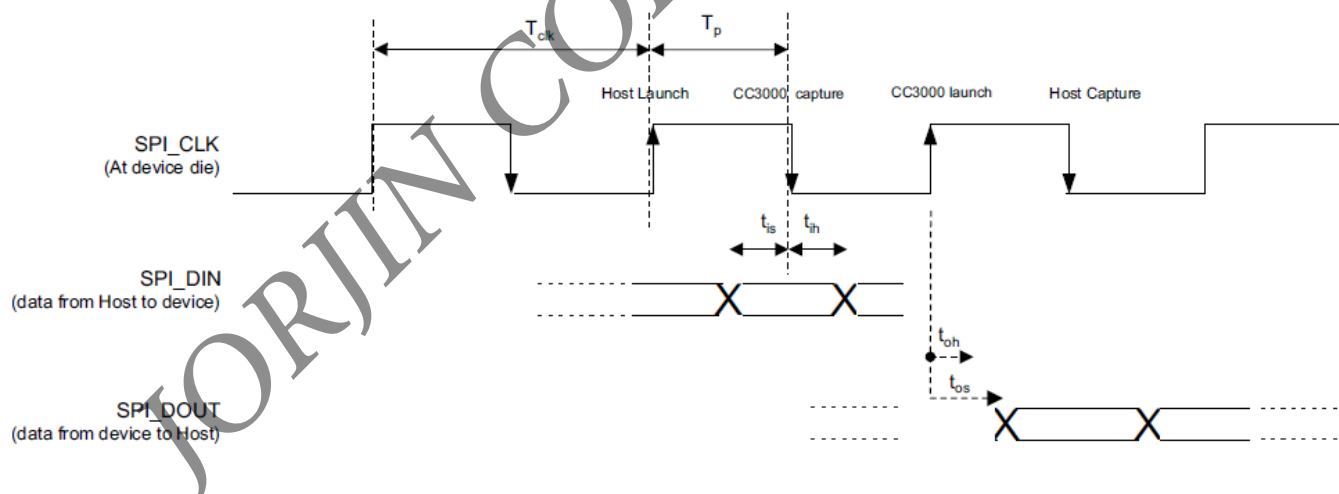


Figure 4 SPI Timing

Symbol	Parameter	Min	Max	Unit
Tclk	Clock period	62.5		ns
Tp	High pulse width (including jitter and duty cycle)	25(3)	37.5(3)	ns
tis	RX setup time; minimum time in which data is stable before capture edge	5		ns
tih	RX hold time; minimum time in which data is stable after capture edge	5		
tos	TX setup propagation time; maximum time from launch edge until data is stable		10.2	
toh	TX hold propagation time; minimum time of data stable after launch edge	3		
CL	Capacitive load on I/F		20	pF

- (1) The CS signal is considered to be asynchronous
- (2) In the scheme above, the launching is on rise edge, and capturing is on fall edge. It can be configured to be the opposite
- (3) 40% - 60% dc (valid for the minimum clock period)

Table 6 SPI Timing

5. POWER-UP SEQUENCE

Figure 7 demonstrates the wake up sequence of WG1300-B0

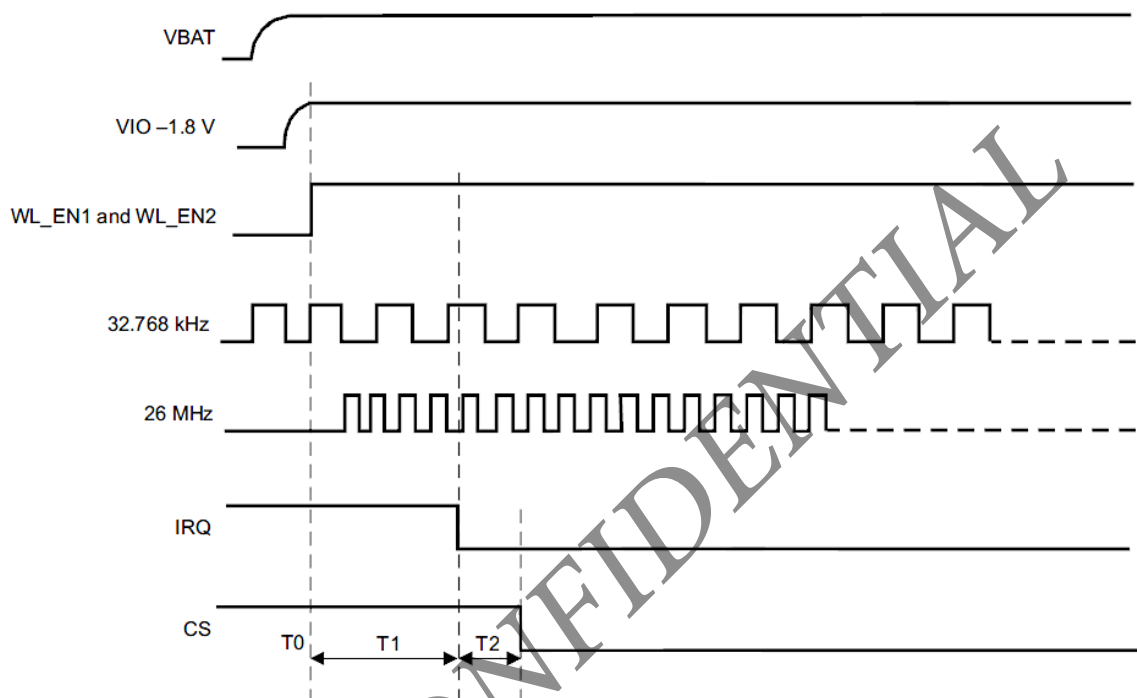


Figure 5 WG1300-B0 Power-On Sequences

Note:

- VBAT_IN, VIO, and SLOWCLK must be available before WL_EN1 and WL_EN2 are asserted.
- At T0: WL_EN1 and WL_EN2 can be asserted after the VIO reaches 90 percent of VIO voltage.
On this functional mode the MCU drives the WLAN pins to initiate the power up (WL_EN1 and WL_EN2 are shorted and connected to MCU GPIO).
- At T1 (wake-up time): The CC3000 device accomplishes power up after the IRQ changes state to LOW. Wake-up time T1 is approximately 53 msec.
- At T2: The normal master SPI write sequence is CS low, followed by IRQ low (CC3000 host), indicating that the CC3000 core device is ready to accept data. The duration of T2 is approximately 7 msec.

6. DEBUG INTERFACE

The debug interface helps customers to evaluate the HW/SW features for their application. It also helps to debug during the development and manufacturing stage. The WG1300-B0 module support RS232 signals and UART signals for debug purpose. Connect RS232 and UART signals to the test points for future debug support.

6.1. UART Debug Lines

A unidirectional UART lines are provided for debugging WLAN subsystem and network subsystem functions. This is a TX-only debug interface that delivers diagnostic messages. Table 11 shows the dedicated UART debug pins of WG1300-B0

Signal names	WG1300-B0 Pin#	Function
WL_UART_DBG	4	Logger for WLAN FW debug
NS_UARTD	2	Networking subsystem UART Debug line

Table 7 WG1300-B0 UART Debug Lines

6.2. RS232 Debug Lines

During production testing the pins below are used for RTTT Wireless LAN SW utility. Table 12 shows the dedicated rs232 debug pins of WG1300-B0

Signal names	Function
WL_RS232_TX	RTTT Test Utility for WLAN RF Debug
WL_RS232_RX	

Table 8 WG1300-B0 RS232 Debug Lines

7. SMT AND BAKING RCOMMENDATIONS

7.1. Baking Condition

- Follow MSL Level 4 to do baking process.
- After bag is opened, devices that will be subjected to reflow solder or other high temperature process must be mounted within 72 hours of factory conditions $<30^{\circ}\text{C}/60\% \text{ RH}$ or stored at $<10\% \text{ RH}$.
- Device require bake, before mounting, if Humidity Indicator Card reads $> 10\%$
- If baking is required, Devices may be baked for 8 hrs at 125°C .

7.2. SMT Recommendation

Figure 8 is recommended reflow profile and Table 13 is its information

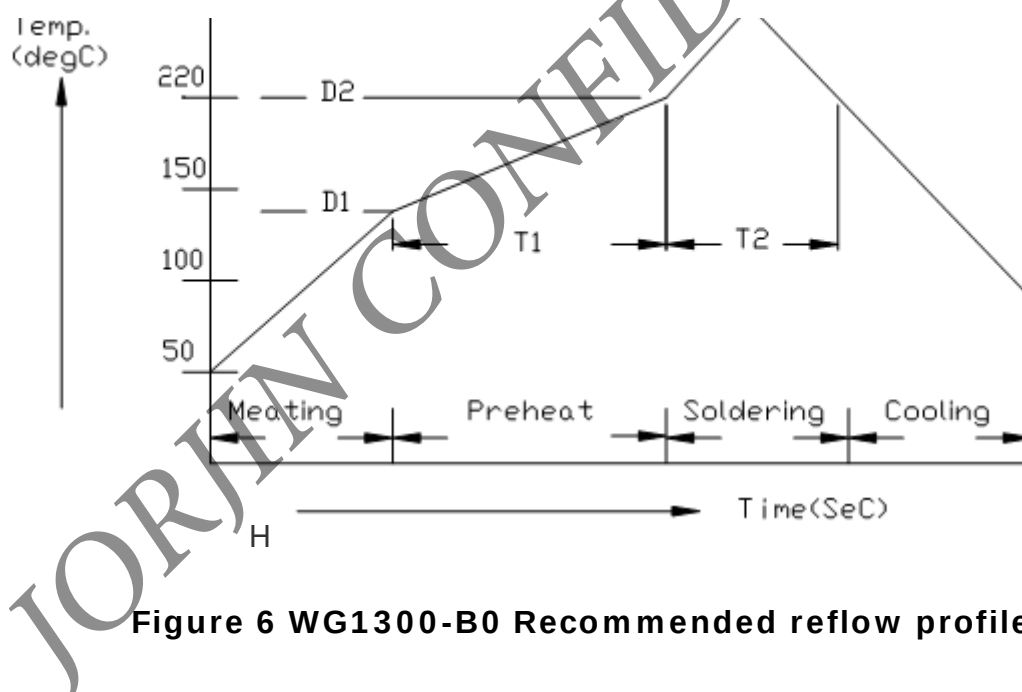


Figure 6 WG1300-B0 Recommended reflow profile

No.	Item	Temperature (°C)	Time (sec)
1	Pre-heat	D1: 140 ~ D2: 200	T1: 80 ~ 120
2	Soldering	D2: = 220	T2: 60 +/- 10
3	Peak-Temp.	D3: 250 °C max	

Table 9 WG1300-B0 reflow information

Note: (1) Reflow soldering is recommended two times maximum.
(2) Add Nitrogen while Reflow process: SMT solder ability will be better.

7.3. Stencil Thickness


0.1~ 0.15 mm (Recommended)

7.4. Soldering Paste (without Pb)

Recommended SENJU N705-GRN3360-K2-V can get better soldering effects.

8. PACKAGE INFORMATION


8.1. Module Mechanical Outline

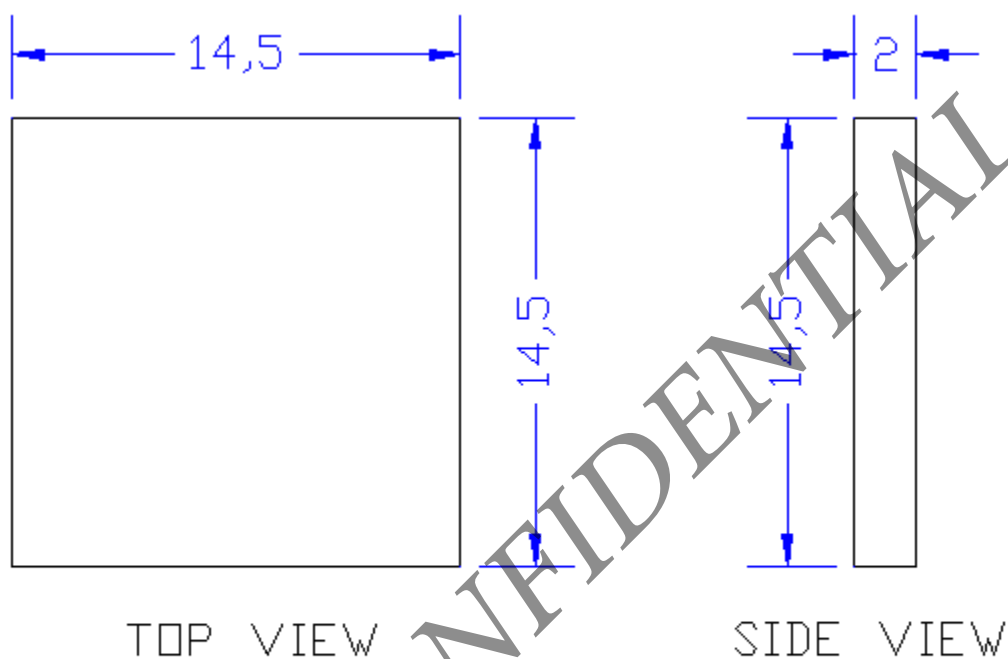

WG1300-B0
Module Size: 14.5x14.5x2.0mm

Figure 7 WG1300-B0 Mechanical Outline

8.2. Package Marking

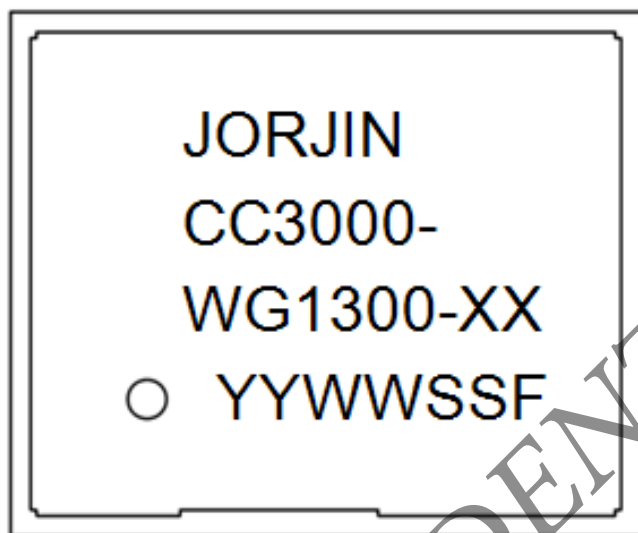

Date Code: YYWWSSF

YY = Digit of the year, ex: 2010=10

WW = Week (01~53)

SS = Serial number from 01 ~99 match to manufacture's lot number

F = Reserve for internal use

Figure 8 WG1300-B0 Package Marking

8.3. Ordering Informaiton

Order Number	Description
WG1300-B0	JORJIN CC3000 Module


Table 10 Orderable WG1300-B0 Part Numbers

9. REFERENCE SCHEMATICS

WG1300-B0 to Host Reference Design

WG1300-B0 MODULE


SLOW CLK 32.768KHz

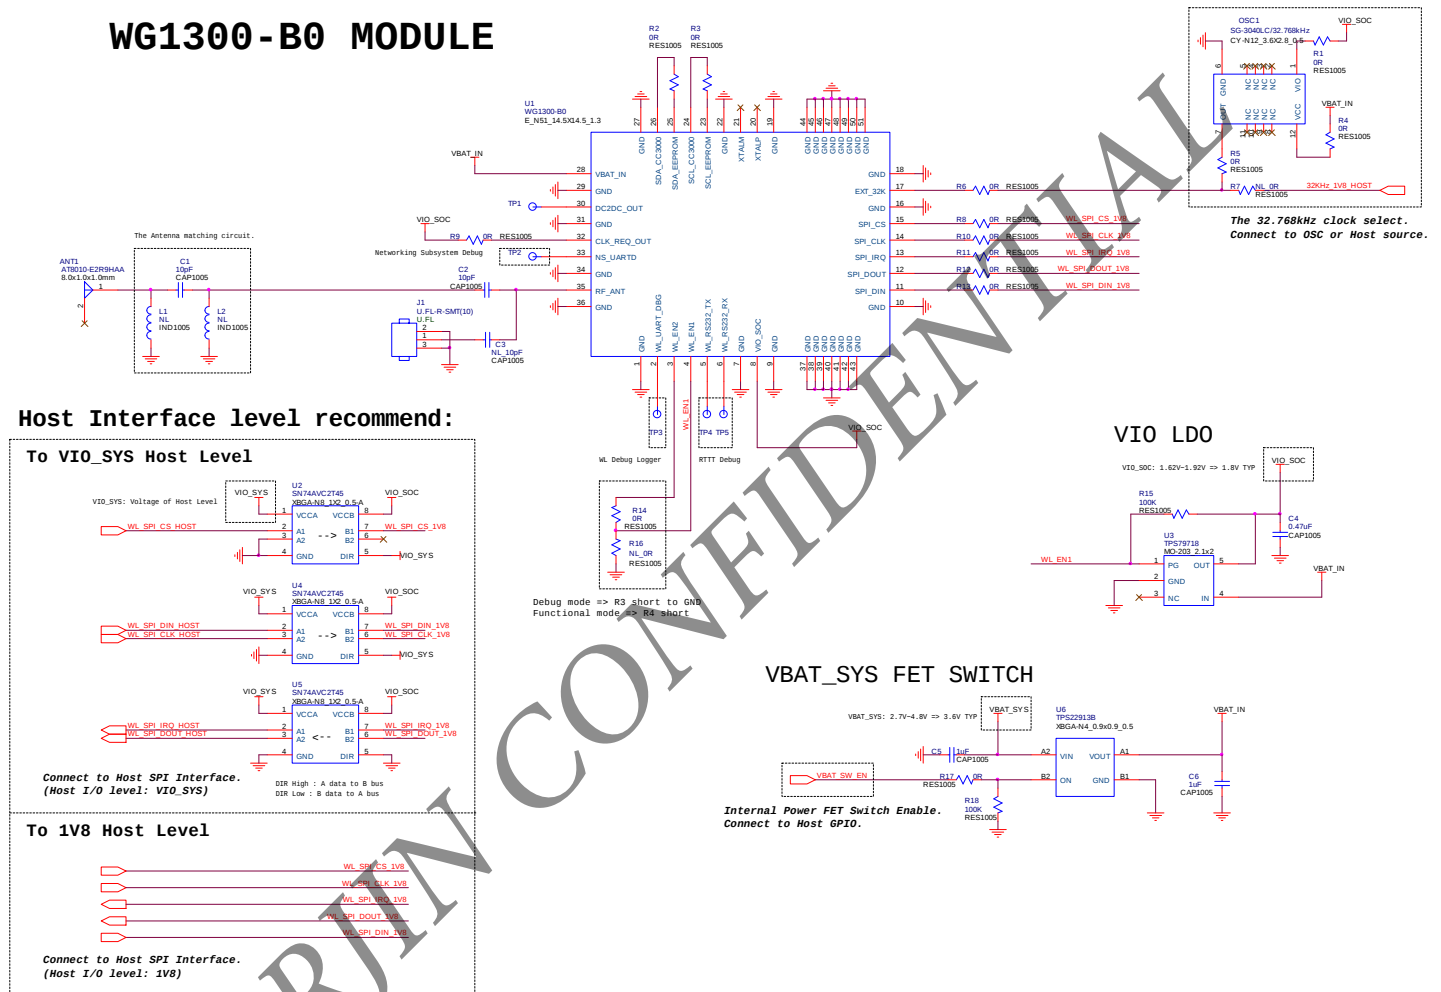

10. LAYOUT RECOMMENDATION


● RF Trace & Antenna

- 50 ohm trace impedance match on the trace to the antenna.
- Recommended 50ohm trace design for PCB layout

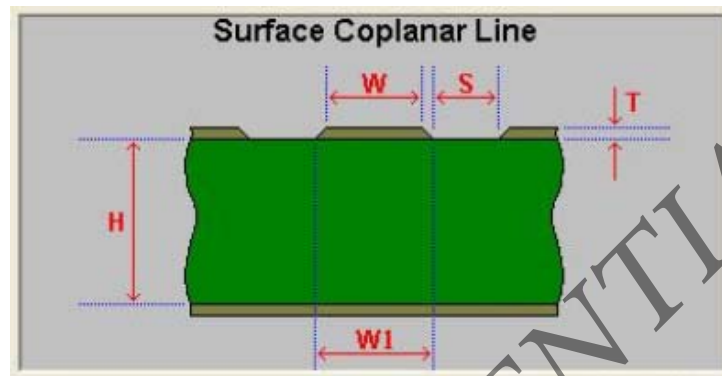

Height Between L1 and L2 (H):	12.0 mil
Trace (W):	14.3 mil
(W1):	14.3 mil
Thickness (T):	2.1 mil
Separation (S):	10.0 mil
Dielectric (Er):	4.3

- Move all the high-speed traces and components far away from the antenna.
- Check ANT vendor for the layout guideline and clearance.
- Matching circuit layout should be as following figure.

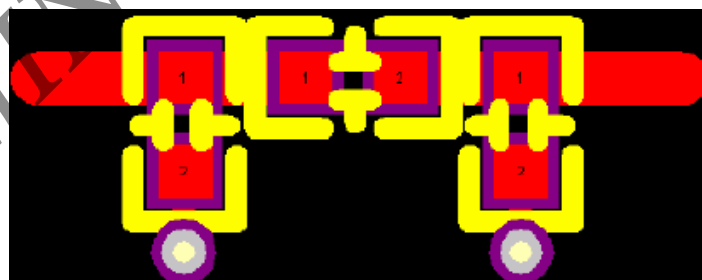

● Power Trace

- Power trace for VBAT_IN should be 40mil wide. 1.8V trace should be 18mil wide.

● Ground

- Having a complete Ground and more GND vias under module in layer1 for

system stable and thermal dissipation as following figure.

- Have a complete Ground pour in layer 2 for thermal dissipation.
- Increase the GND pour in the 1st layer, move all the traces from the 1st layer to the inner layers if possible.
- Move GND vias close to the pad.

- **Slow Clock**

- The slow clock trace should not be routed above or below digital signals on other layers.

- Add test points as the list below

Pin name
DC2DC_OUT
NS_UARTD
WL_UART_DBG
WL_RS232_TX
WL_RS232_RX

CONTACT JORJIN TECHNOLOGY

Headquarters

5F, No.28, Lane 141, Sing-ai Rd, Neihu
District, Taipei City 114, Taiwan R.O.C.

Website

<http://www.jorjin.com.tw>

Technical Support

davidkuo@jorjin.com.tw

JORJIN CONFIDENTIAL

11. HISTORY CHANGES

Revision	Date	Description
D 0.1	2012/9/8	Release 0.1
D 0.2	2012/10/12	1. Add module picture 2. Delete Sales contact information
D 0.3	2013/5/13	Update module description with certification information

JORJIN CONFIDENTIAL

射频和天线设计培训课程推荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立,致力并专注于微波、射频、天线设计研发人才的培养;我们于 2006 年整合合并微波 EDA 网(www.mweda.com),现已发展成为国内最大的微波射频和天线设计人才培养基地,成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程,广受客户好评;并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书,帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司,以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训推荐课程列表: <http://www.edatop.com/peixun/tuijian/>



射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材;旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习,能够让学员完全达到和胜任一个合格的射频工程师的要求...

课程网址: <http://www.edatop.com/peixun/rfe/110.html>

手机天线设计培训视频课程

该套课程全面讲授了当前手机天线相关设计技术,内容涵盖了早期的外置螺旋手机天线设计,最常用的几种手机内置天线类型——如 monopole 天线、PIFA 天线、Loop 天线和 FICA 天线的设计,以及当前高端智能手机中较常用的金属边框和全金属外壳手机天线的设计;通过该套课程的学习,可以帮助您快速、全面、系统地学习、了解和掌握各种类型的手机天线设计,以及天线及其匹配电路的设计和调试...

课程网址: <http://www.edatop.com/peixun/antenna/133.html>



WiFi 和蓝牙天线设计培训课程



该套课程是李明洋老师应邀给惠普 (HP)公司工程师讲授的 3 天员工内训课程录像,课程内容是李明洋老师十多年工作经验积累和总结,主要讲解了 WiFi 天线设计、HFSS 天线设计软件的使用,匹配电路设计调试、矢量网络分析仪的使用操作、WiFi 射频电路和 PCB Layout 知识,以及 EMC 问题的分析解决思路等内容。对于正在从事射频设计和天线设计领域工作的您,绝对值得拥有和学习!...

课程网址: <http://www.edatop.com/peixun/antenna/134.html>

CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出,是最全面、系统、专业的 CST 微波工作室培训课程套装,所有课程都由经验丰富的专家授课,视频教学,可以帮助您从零开始,全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装,还可超值赠送 3 个月免费学习答疑...

课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 学习培训课程套装

该套课程套装包含了本站全部 HFSS 培训课程,是迄今国内最全面、最专业的 HFSS 培训教程套装,可以帮助您从零开始,全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装,更可超值赠送 3 个月免费学习答疑,随时解答您学习过程中遇到的棘手问题,让您的 HFSS 学习更加轻松顺畅...

课程网址: <http://www.edatop.com/peixun/hfss/11.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程,共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解,并多结合设计实例,由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS,迅速提升个人技术能力,把 ADS 真正应用到实际研发工作中去,成为 ADS 设计专家...

课程网址: <http://www.edatop.com/peixun/ads/13.html>



我们的课程优势:

- ※ 成立于 2004 年,10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养,更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授,结合实际工程案例,直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>