

FSC-BT803

CSR 8670 Bluetooth Module Data Sheet

Document Type:	Bluetooth Module Datasheet
Document Version:	V1.0
Release Date:	2013-9-6

Revision History

Date	Version	Description	Author
2013-09-06	V1.0	■ First Release	

CONTENT

1. INTRODUCTION	4
1.1 BLOCK DIAGRAM	4
1.2 FEATURES	5
1.3 APPLICATIONS	6
2. GENERAL SPECIFICATION	7
3. PHYSICAL CHARACTERISTIC	8
3.1 Pinout Diagram	9
3.1 Pin Description	9
4. PHYSICAL INTERFACE	11
4.1 POWER SUPPLY	11
4.2 AUDIO INTERFACES	11
4.2.1 Audio Codec Interface	11
4.2.2 ADC	11
4.2.3 ADC Sample Rate Selection	11
4.2.4 ADC Digital Gain	11
4.2.5 DAC	12
4.2.6 DAC Sample Rate Selection	12
4.2.7 DAC Digital Gain	12
4.2.8 DAC Analog Gain	12
4.2.9 Microphone Input	12
4.2.10 Audio Output Stage	12
4.3 GENERAL PURPOSE ANALOG IO	13
4.4 GENERAL PURPOSE DIGITAL IO	13
4.5 RF INTERFACE	13
4.6 SERIAL INTERFACES	13
4.6.1 UART	13
4.6.2 I2C	13
4.6.3 SPI	13
5. ELECTRICAL CHARACTERISTIC	14
5.1 ABSOLUTE MAXIMUM RATING	14
5.2 RECOMMENDED OPERATING CONDITIONS	15
6. RECOMMENDED TEMPERATURE REFLOW PROFILE	16
7. Application Schematic	17

1. INTRODUCTION

The FSC-BT803 Bluetooth® module is a perfect 4.0 dual-mode solution for wireless applications, such as smart watches, Bluetooth Bracelets, and wireless transmission devices. It can be connected with any Bluetooth® devices in an operating range. It is small and thin so the designers can have better flexibilities for the product shapes.

The FSC-BT803 Bluetooth® module complies with Bluetooth® specification version 4.0. It supports HSP,HFP,A2DP,AVRCP,PBAP,MAP,SPP, BLE....profiles. It integrates an ultra-low-power DSP and application processor with embedded flash memory, a high-performance stereo codec, a power management subsystem, LED and LCD drivers in a SOC IC. The dual-core architecture with flash memory enables manufactures to easily differentiate their products with new features without extending development cycles. It integrates RF Baseband controller, antenna,... etc. and provide UART interface, programmable I/O, stereo speaker output, microphone input,... etc.

The detail information of FSC-BT803 Bluetooth® module is presented in this document below.

1.1 Block Diagram

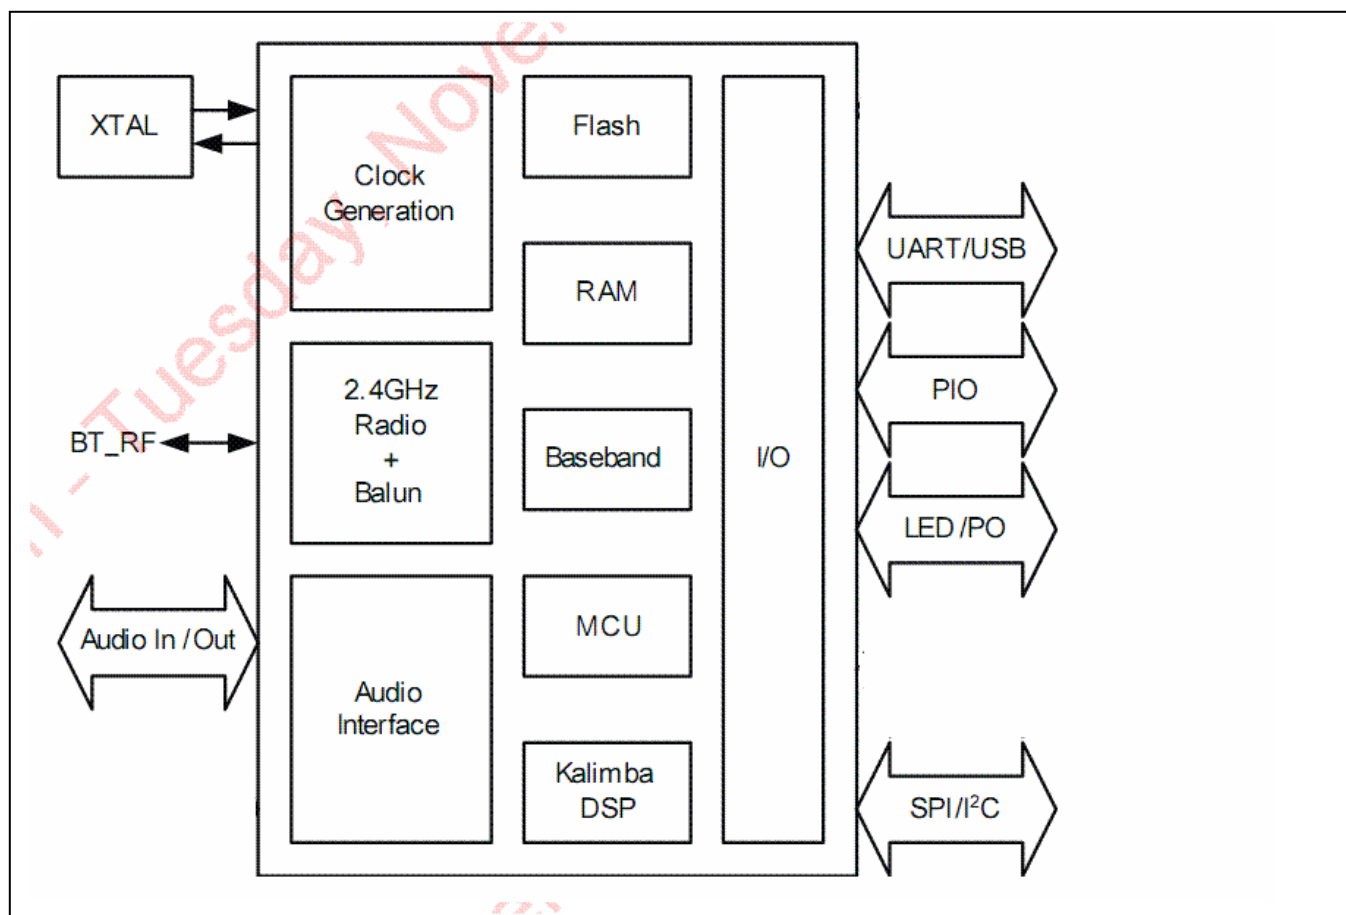


Figure 1

1.2 Features

- ✓ Small overall dimension(13mm x 13mm x 2.0mm)
- ✓ Bluetooth Specification V4.0(Dual Mode)
- ✓ Class1,Class 2 and Class 3 support
- ✓ Physical connection as SMD type
- ✓ 80MHz RISC MCU and 80MIPS Kalimba DSP
- ✓ 16Mb internal flash memory(64-bit wide,45ns);optional support for 64Mb of external SPI flash
- ✓ Stereo codec with 2 channels ADC and up to 6 microphone inputs(include bias generators and digital microphone support)
- ✓ Support for CSR's latest CVC technology for narrow-band and wideband voice connections including wind noise reduction
- ✓ Music Enhancements: SBC,MP3,AAC and AAC+,Faststream codec,atpX,5-band EQ,3D stereo separation and so on.
- ✓ Serial Interfaces: UART,USB 2.0,I2C and SPI
- ✓ Support HSP, HFP, A2DP, AVRCP,PBAP,MAP,SPP,BLE profile
- ✓ Multipoint support for HFP connection to 2 handsets for voice
- ✓ Multipoint support for A2DP connection to 2 A2DP source for music palyback
- ✓ 3 Hardware LED controllers (for RGB) and ability to drive LCD segment display directly
- ✓ Support for up to 6 capacitive touch sensor inputs
- ✓ Built-in RF combo filter, Integrated 26M Crystal.
- ✓ No radio signal interference, support for 802.11 co-existence
- ※ *Some features are optional for customization on demand.*

1.3 Application

- ✓ Smart watches
- ✓ Bluetooth bracelets
- ✓ Bluetooth headphones
- ✓ Smart remote controllers
- ✓ Wired or wireless soundbars
- ✓ Wired or wireless speakers
- ✓ Wearable audio with sensors(health and well-bing applications)

2. GENERAL SPECIFICATION

Bluetooth Specification	
Chip Set	CSR8670
Module ID	FSC-BT803
BT Standard	Bluetooth® V4.0 specification
RF TX Output Power	10dBm (Max)
Sensitivity	-90dBm@0.1%BER
Frequency Band	2.402GHz~2.480GHz ISM Band
Baseband Crystal OSC	26MHz
Hopping	1600hops/sec, 1MHz channel space
RF Input Impedance	50 ohms
Major Interface	• Microphone : Input (Differential) • Speaker : Output (Differential) • UART : Tx/Rx • PIOs • Antenna
Profile	HSP, HFP, A2DP, AVRCP, PBAP, MAP, SPP, BLE
Voice Processor	80MIPS Kalimba with cVc support
Power	
Supply Voltage	1.8V ~ 4.2V DC
Working Current	Depends on profiles
Standby Current	<1mA
Operating Environment	
Temperature	-40°C to +85°C
Humidity	10%~90% Non-Condensing
Environmental	RoHS Compliant

Table 1

3. PHYSICAL CHARACTERISTIC

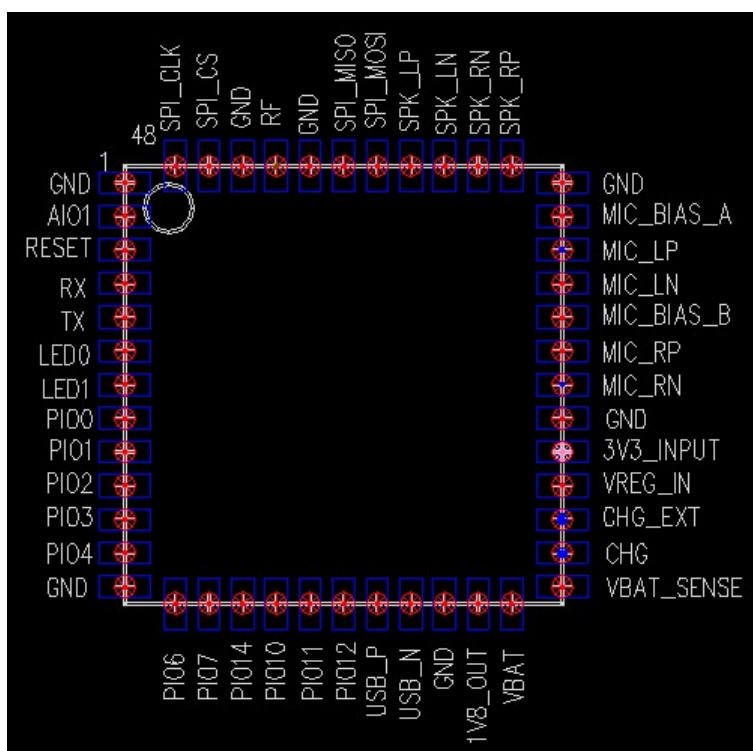


Figure 2

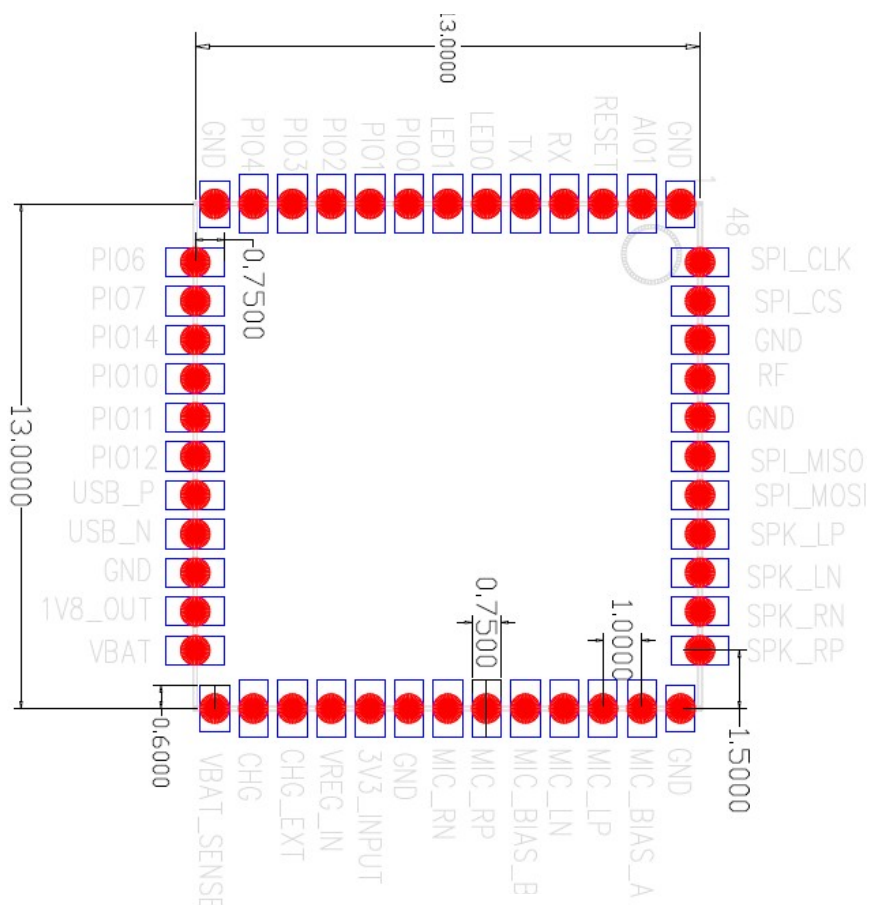


Figure 3

3.2 Pin Description

Pin #	Pin Name	Pad Type	Description
1	GND	Ground	Digital Ground
2	AIO_1	Bi-directional	Analogue programmable input / output line
3	RESET	Input with strong pull-up	Reset if low. Input debounced so must be low for >5ms to cause a reset
4	RX	Bi-directional with strong pull_up	UART data input
5	TX	Bi-directional with weak pull_up	UART data output
6	LED0	Open drain	LED driver Alternative function PO[29]
7	LED1	Open drain	LED driver Alternative function PO[30]
8	PIO0	Bi-directional with weak pull_down	Programmable input/output line
9	PIO1	Bi-directional with weak pull_down	Programmable input/output line
10	PIO2	Bi-directional with weak pull_down	Programmable input/output line
11	PIO3	Bi-directional with weak pull_down	Programmable input/output line
12	PIO4	Bi-directional with weak pull_down	Programmable input/output line
13	GND	Ground	Digital Ground
14	PIO6	Bi-directional with weak pull_down	Programmable input/output line
15	PIO7	Bi-directional with weak pull_down	Programmable input/output line
16	PIO14	Bi-directional with weak pull_down	Programmable input/output line
17	PIO10	Bi-directional with weak pull_down	Programmable input/output line
18	PIO11	Bi-directional with weak pull_down	Programmable input/output line
19	PIO12	Bi-directional with weak pull_down	Programmable input/output line
20	USB_P	Bi-directional	USB data plus with selectable internal 1.5kohm pull-up resistor
21	USB_N	Bi-directional	USB data minus

22	GND	Ground	Digital Ground
23	+1V8	Open drain output	+1V8
24	VBAT	Power supply	Battery positive terminal
25	VBAT_SENSE	Connect to VBAT	Battery charger sense input
26	CHG	Connect to USB VBUS	Battery charger input
27	CHG_EXT	NC	External battery charger control
28	VREG_IN	Input enable	Regulator enable input. Can also be sensed as an input. Regulator enable and multifunction button. A high input (tolerant to VBAT) enables the on-chip regulators, which can then be latched on internally and the button used as a multifunction input.
29	3V3_INPUT	NC or Connect to 3.3V	1.7V to 3.6V positive supply input for digital input/output ports
30	GND	Ground	Digital Ground
31	MIC_RN	Analogue in	Microphone input negative,right
32	MIC_RP	Analogue in	Microphone input positive,right
33	MIC_BIAS_B	Analogue out	Microphone bias B
34	MIC_LN	Analogue in	Microphone input negative,left
35	MIC_LP	Analogue in	Microphone input positive,left
36	MIC_BIAS_A	Analogue out	Microphone bias A
37	GND	Ground	Digital Ground
38	SPKR_RP	Analogue out	Speaker output negative,right
39	SPKR_RN	Analogue out	Speaker output positive,right
40	SPKR_LN	Analogue out	Speaker output negative,left
41	SPKR_LP	Analogue out	Speaker output positive,left
42	SPI_MOSI	Input with weak pull-down	SPI data input
43	SPI_MISO	Output with weak pull-down	SPI data output
44	GND	Ground	Analogue Ground
45	RF	RF_IN	Bluetooth 50ohm transmitter output/receiver input

46	GND	Ground	Analogue Ground
47	SPI_CSB	Input with strong pull-up	Chip select for SPI, active low
48	SPI_CLK	Input with weak pull-down	SPI Clock

Table 2

4. PHYSICAL INTERFACE

4.1 Power Supply

The transient response of the regulator is important. If the power rails of the module are supplied from an external voltage source, the transient response of any regulator used should be 20μs or less.

4.2 Audio Interfaces

The Audio interface circuit consists of:

- Stereo/dual-mono audio codec
- Dual analogue audio inputs
- Dual analogue audio outputs

4.2.1 Audio Codec Interface

The main features of the interface are:

- Stereo and mono analogue input for voice band and audio band
- Stereo and mono analogue output for voice band and audio band

4.2.2 ADC

Figure 3 shows the CSR8670 consists of 2 high-quality ADCs:

- Each ADC has a second-order Sigma-Delta converter
- Each ADC is a separate channel with identical functionality
- There are 2 gain stages for each channel, 1 of which is an analogue gain stage and the other is a digital gain stages

4.2.3 ADC Sample Rate Selection

Each ADC supports the following pre-defined sample rates, although other rates are programmable, e.g. 40kHz:

- 8kHz
- 11.025 kHz
- 16kHz
- 22.050kHz
- 24kHz
- 32 kHz
- 44.1kHz
- 48 kHz

4.2.4 ADC Digital Gain

A digital gain stage inside the ADC varies from -24dB to 21.5dB, see as below, there is also a fine gain interface with 9-bit gain setting allowing gain changes in 1/32 steps.

The Firmware controls the audio input gain.

4.2.5 DAC

The DAC consists of:

- 2 fourth-order Sigma-Delta converters enabling 2 separate channels that are identical functionality, as figure x shows
- 2 gain stages for each channel, 1 of which is an analogue gain stage and the other is a digital gain stage

4.2.6 DAC Sample Rate Selection

- 8kHz
- 11.025kHz
- 16kHz
- 22.050kHz
- 32kHz
- 40kHz
- 44.1kHz
- 48kHz
- 96kHz

4.2.7 DAC Digital Gain

A digital gain stage inside the DAC varies from -24dB to 21.5dB, see as below, there is also a fine gain interface with 9-bit gain setting enabling gain changes in 1/32 steps.

The overall gain control of the ADC is controlled by the firmware. Its setting is a combined function of the digital and analogue amplifier settings

4.2.8 DAC Analogue Gain

As below shows that the DAC analogue gain stage consists of 8 gain selection values that represent seven 3dB steps

The firmware controls the overall gain control of the DAC. Its setting is a combined function of the digital and analogue amplifier settings

4.2.9 Microphone Input

FSC-BT803 contains 2 independent low-noise microphone bias generators. The microphone bias generators are recommended for biasing electret condenser microphones. A biasing circuit for microphones with a sensitivity between about -40dB to -60dB (0dB=1V/Pa)

4.2.10 Audio Output Stage

The output digital circuitry converts the signal from 16-bit per sample, linear PCM of variable sampling frequency to a 2Mbits/sec multi-bit stream, which is fed into the analogue output circuitry.

The output circuit comprises a digital to analogue converter with gain setting and output amplifier. Its class-AB output-stage is capable of driving a signal on both channels of up to 2V pk-pk- differential into a load of 16Ω. The output is available as a differential signal between SPK_R_RP and SPK_R_RN for the left channel; and between SPK_L_LP and SPK_L_LN for the right channel. The output is capable of driving a speaker directly if its impedance is at least 8Ω if only one channel is connected or an external regulator is used.

The gain of the output stage is controlled by a 3-bit programmable resistive divider, which sets the gain in steps of approximately 3dB.

The multi-bit stream from the digital circuitry is low pass filtered by a second order bi-quad filter with a pole at 20kHz. The signal is then amplified in the fully differential output

stage, which has a gain bandwidth of typically 1MHz.

- 13-bit or 16-bit linear, 8-bit u-law or A-law companded sample formats.
- Receives and transmits on any selection of 3 the first 4 slots following PCM_SYNC.

The PCM configuration options are enabled by setting the PS Key PSKEY_PCM_CONFIG32.

4.3 General Purpose Analog IO

The general purpose analog IOs can be configured as ADC inputs by software. Do not connect them if not use.

4.4 General Purpose Digital IO

There are nine general purpose digital IOs defined in the module. All these GPIOs can be configured by software to realize various functions, such as button controls, LED displays or interrupt signals to host controller, etc. Do not connect them if not use.

4.5 RF Interface

The module integrates a balun filter. The user can connect a 50ohms antenna directly to the RF port.

4.6 Serial Interfaces

4.6.1 UART

This is a standard UART interface for communicating with other serial devices. The UART interface provides a simple mechanism for communicating with other serial devices using the RS232 protocol.

When the module is connected to another digital device, UART_RX and UART_TX transfer data between the two devices. The remaining two signals, UART_CTS and UART_RTS, can be used to implement RS232 hardware flow control where both are active low indicators.

Note: The serial port interface(UART)can be used for system debugging.Don't support to use command set for profile function application by UART,such as HFP/A2DP/AVRCP and so on.These profiles function application can be contolled only by PIO,such as pairing/connect/answer/play/pause/next/previous function application and so on.

4.6.2 I2C Interface

As this I2C interface is software-driven it is suited to relatively slow functions such as driving a dot matrix LCD, keyboard scanner or EEPROM. If it is not used, then PIO[7:6] are available to form a software-driven master I2C interface.

4.6.3 SPI

The synchronous serial port interface (SPI) can be used for system debugging. It can also be used for in-system programming for the flash memory within the module. SPI interface uses the SPI_MOSI, SPI_MISO, SPI_CSB and SPI_CLK pins. Testing points for the SPI interface are reserved on board in case that the firmware shall be updated during manufacture.

The module operates as a slave and thus SPI_MISO is an output of the module. SPI_MISO is not in high-impedance state when SPI_CSB is pulled high. Instead, the module outputs 0 if the processor is running and 1 if it is stopped. Thus the module should NOT be connected in

a multi-slave arrangement by simple parallel connection of slave SPI_MISO lines.

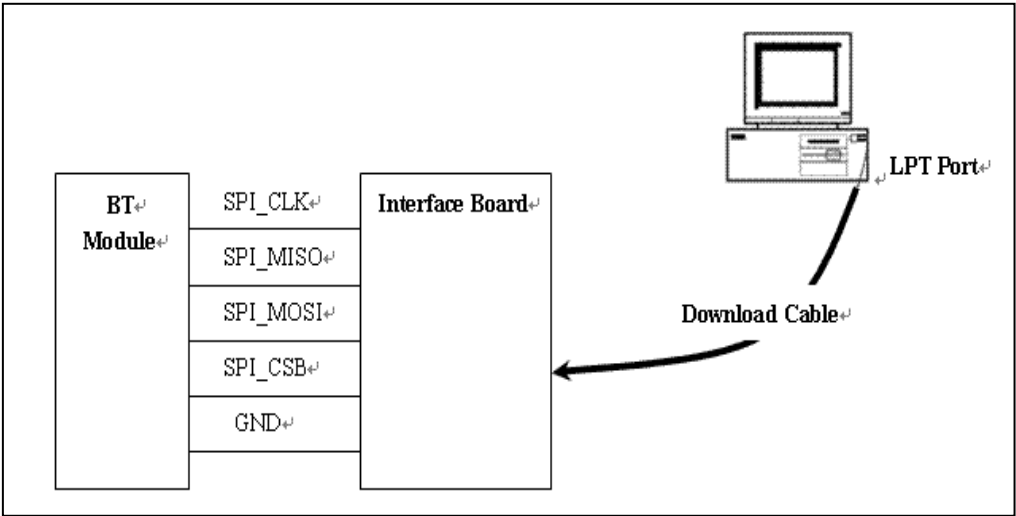


Figure 4

5. ELECTRICAL CHARACTERISTICS

5.1 Absolute Maximum Ratings

Rating		Min	Max	Unit
Storage temperature		-40	105	°C
Supply Voltage				
5V(USB VBUS)	CHG	-0.4	5.75	V
3.3V	3V3_INPUT	-0.4	3.60	V
Battery	LED[2:0]	-0.4	4.40	V
	VBAT	-0.4	4.40	V
	VBAT_SENSE	-0.4	4.40	V
	VREG_IN	-0.4	4.40	V
Other terminal voltages		VSS - 0.4	VDD + 0.4	V

Table 3

5.2 Recommended Operating Conditions

Rating		Min	Typ	Max	Unit
Operating temperature range		-40	20	85	°C
Supply Voltage					
5V(USB VBUS)	CHG	4.75 / 3.10	5	5.75	V
Battery	LED[2:0]	1.1	3.7	4.25	V
	VBAT	0	3.7	4.25	V
	VBAT_SENSE	0	3.7	4.25	V
	VREGENABLE	0	3.7	4.25	V
3.3V	3V3_INPUT	1.7	3.3	3.6	V

Table 4

6. RECOMMENDED TEMPERATURE REFLOW PROFILE

The soldering profile depends on various parameters necessitating a set up for each application. The data here is given only for guidance on solder reflow.

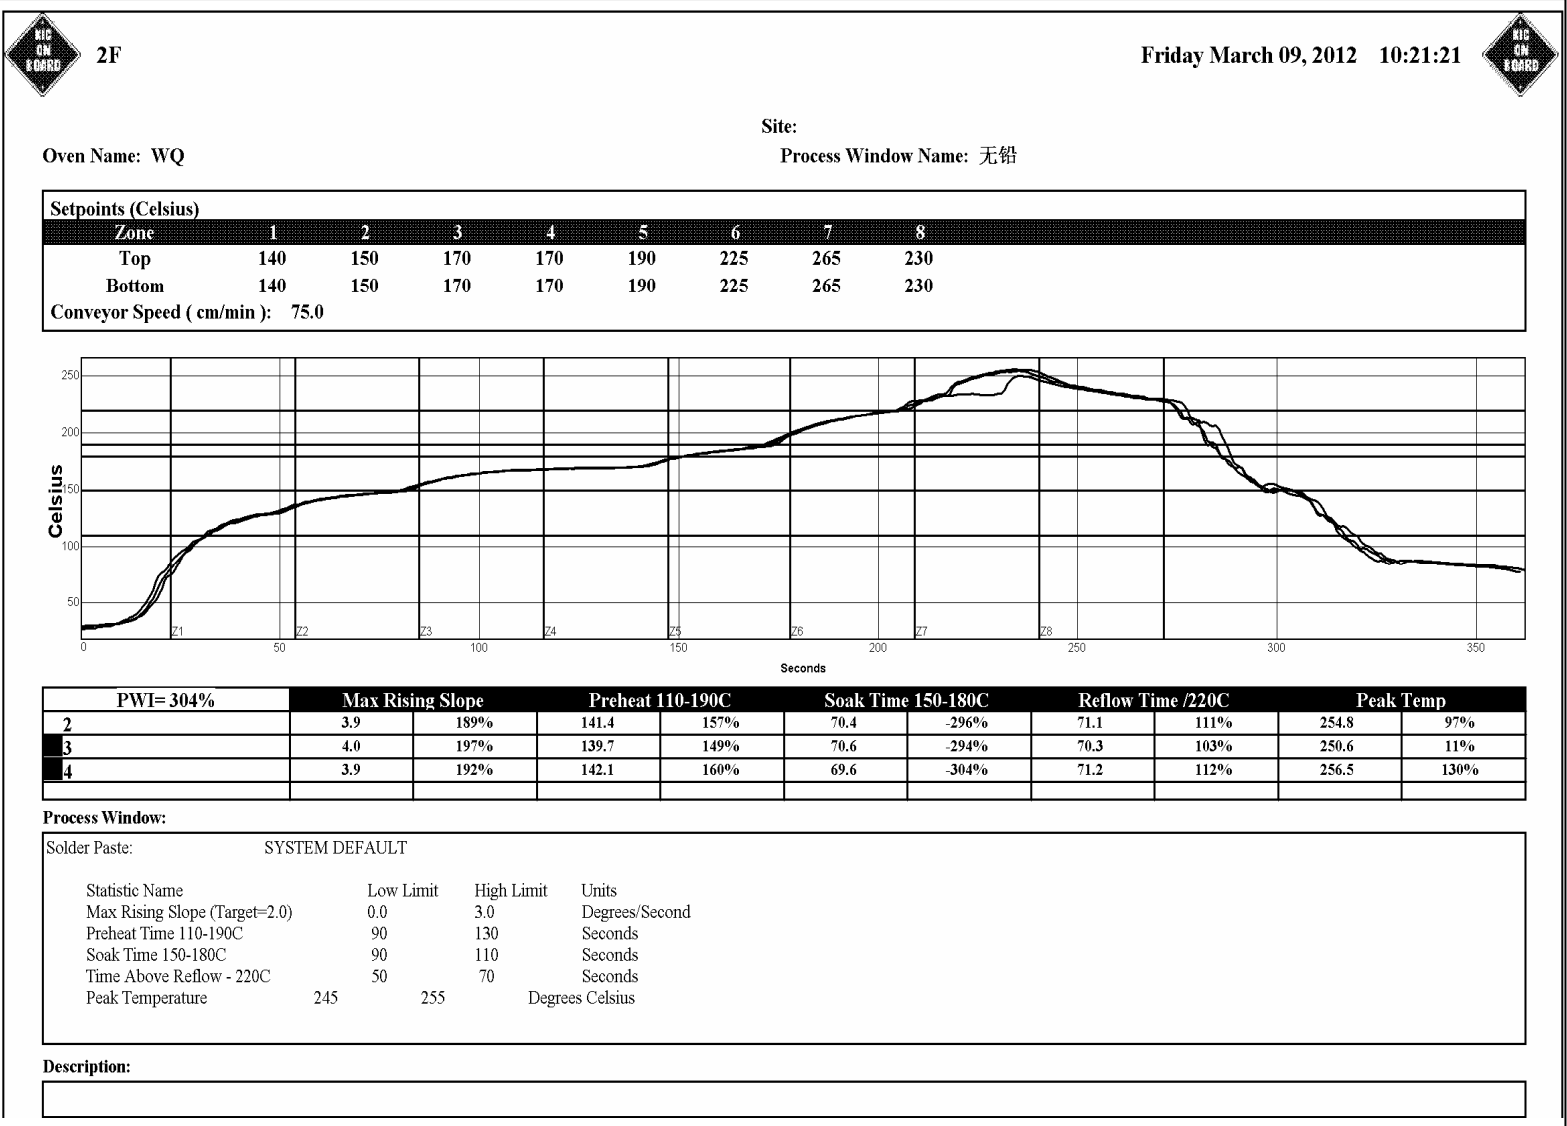


Figure 5


7. Application Schematic

D


C

B






A

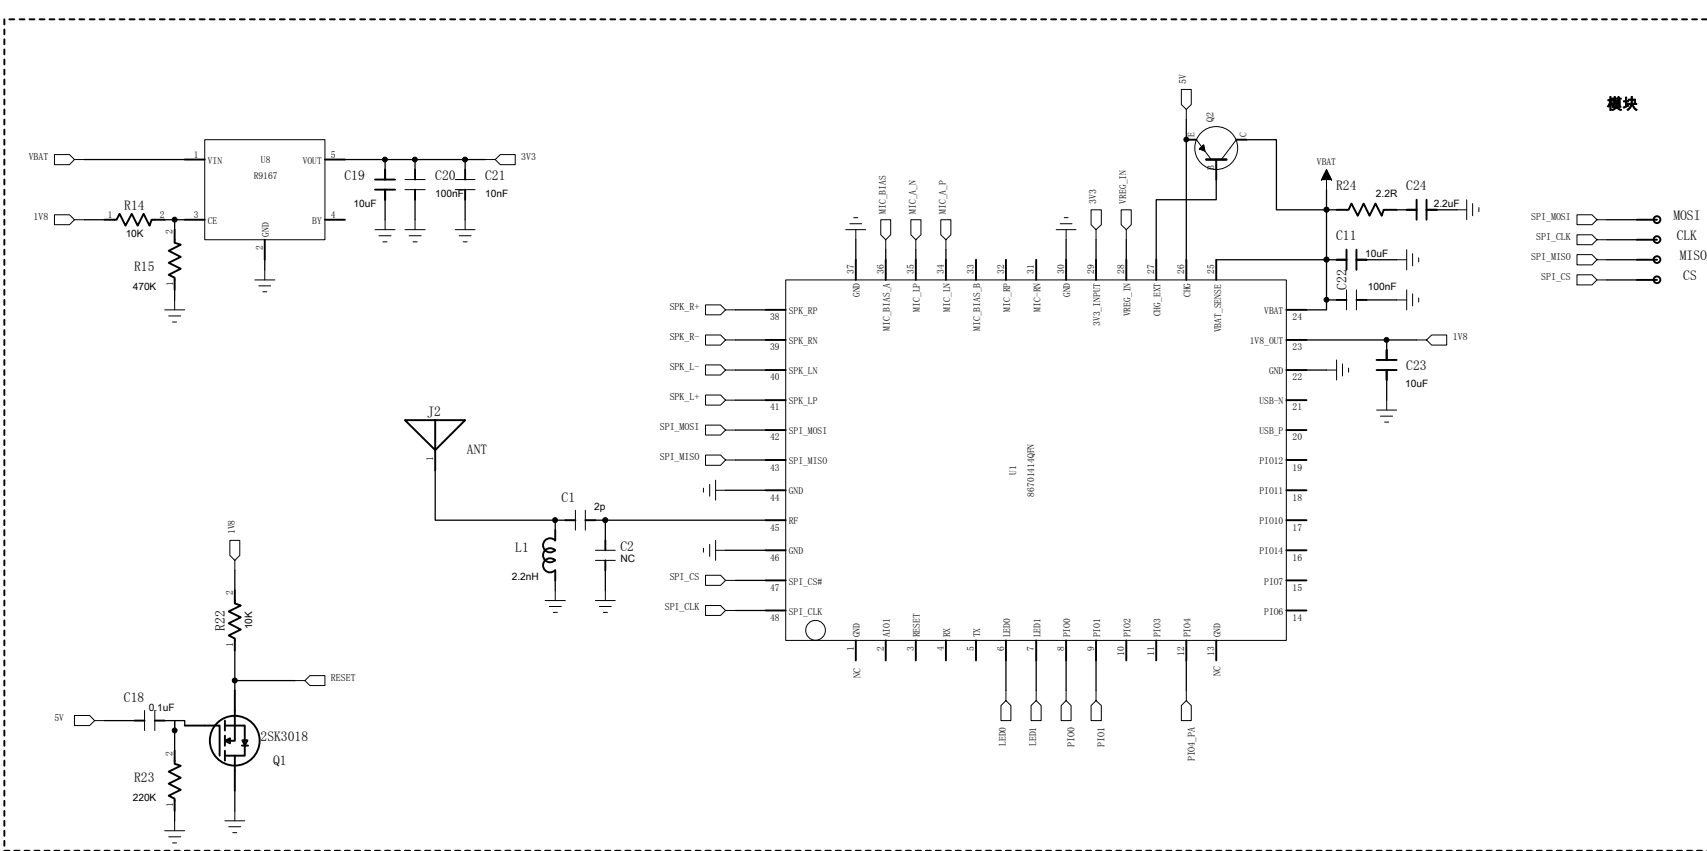

模块



REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

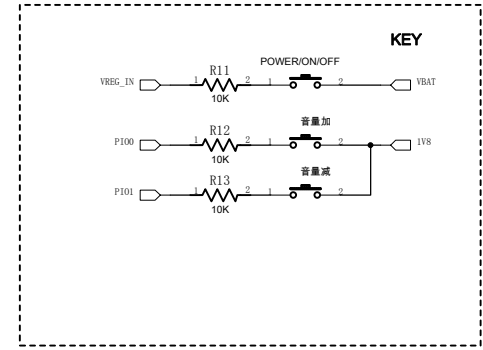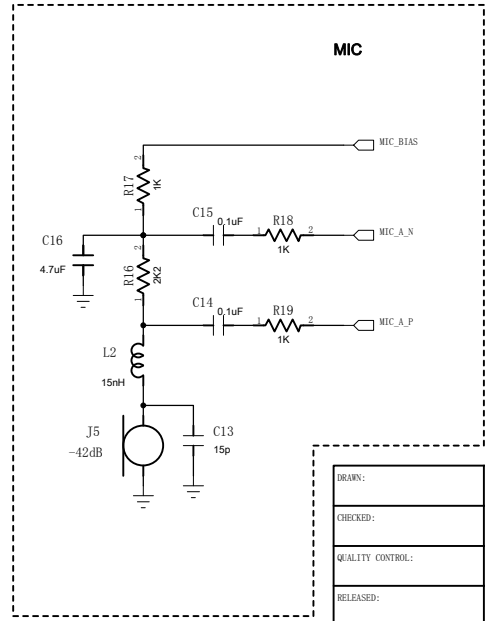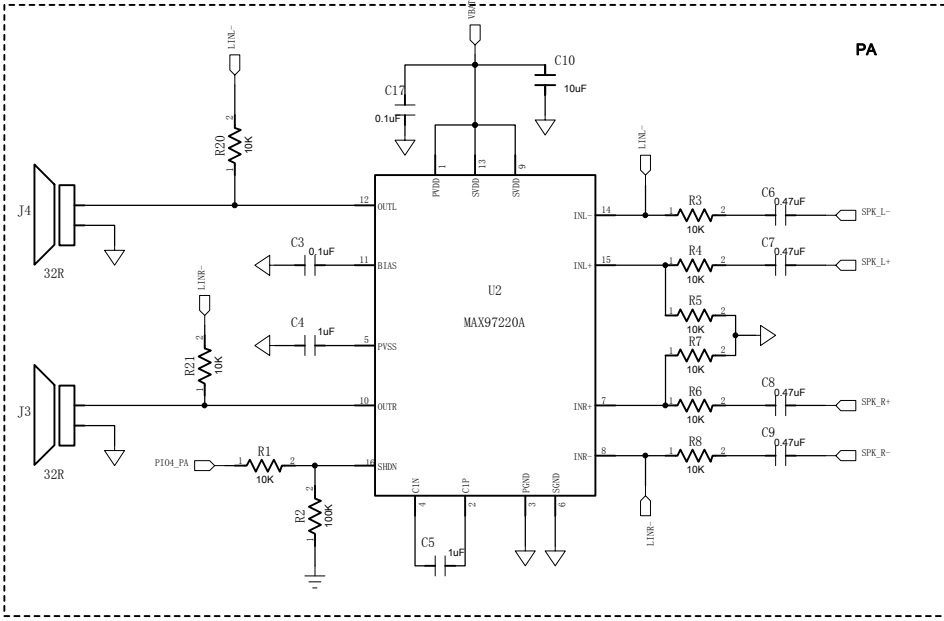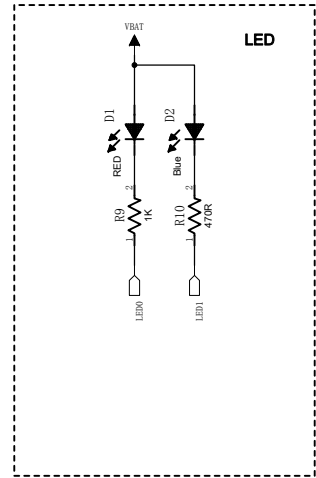

DRAWN:		DATED:		COMPANY:	
CHECKED:		DATED:		TITLE:	
QUALITY CONTROL:		DATED:		CODE:	SIZE:
RELEASED:		DATED:		DRAWING NO:	
				REV:	
SCALE:				SHEET: 1 OF 1	

A2

射频和天线设计培训课程推荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立,致力并专注于微波、射频、天线设计研发人才的培养;我们于 2006 年整合合并微波 EDA 网(www.mweda.com),现已发展成为国内最大的微波射频和天线设计人才培养基地,成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程,广受客户好评;并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书,帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司,以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训推荐课程列表: <http://www.edatop.com/peixun/tuijian/>



射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材;旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习,能够让学员完全达到和胜任一个合格的射频工程师的要求...

课程网址: <http://www.edatop.com/peixun/rfe/110.html>

手机天线设计培训视频课程

该套课程全面讲授了当前手机天线相关设计技术,内容涵盖了早期的外置螺旋手机天线设计,最常用的几种手机内置天线类型——如 monopole 天线、PIFA 天线、Loop 天线和 FICA 天线的设计,以及当前高端智能手机中较常用的金属边框和全金属外壳手机天线的设计;通过该套课程的学习,可以帮助您快速、全面、系统地学习、了解和掌握各种类型的手机天线设计,以及天线及其匹配电路的设计和调试...

课程网址: <http://www.edatop.com/peixun/antenna/133.html>



WiFi 和蓝牙天线设计培训课程



该套课程是李明洋老师应邀给惠普 (HP) 公司工程师讲授的 3 天员工内训课程录像,课程内容是李明洋老师十多年工作经验积累和总结,主要讲解了 WiFi 天线设计、HFSS 天线设计软件的使用,匹配电路设计调试、矢量网络分析仪的使用操作、WiFi 射频电路和 PCB Layout 知识,以及 EMC 问题的分析解决思路等内容。对于正在从事射频设计和天线设计领域工作的您,绝对值得拥有和学习!...

课程网址: <http://www.edatop.com/peixun/antenna/134.html>

CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出,是最全面、系统、专业的 CST 微波工作室培训课程套装,所有课程都由经验丰富的专家授课,视频教学,可以帮助您从零开始,全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装,还可超值赠送 3 个月免费学习答疑...

课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 学习培训课程套装

该套课程套装包含了本站全部 HFSS 培训课程,是迄今国内最全面、最专业的 HFSS 培训教程套装,可以帮助您从零开始,全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装,更可超值赠送 3 个月免费学习答疑,随时解答您学习过程中遇到的棘手问题,让您的 HFSS 学习更加轻松顺畅...

课程网址: <http://www.edatop.com/peixun/hfss/11.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程,共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解,并多结合设计实例,由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS,迅速提升个人技术能力,把 ADS 真正应用到实际研发工作中去,成为 ADS 设计专家...

课程网址: <http://www.edatop.com/peixun/ads/13.html>



我们的课程优势:

- ※ 成立于 2004 年,10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养,更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授,结合实际工程案例,直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>